



Ordinary Thinking

Objective Questions

Young's Modulus and Breaking Stress

1. The length of an iron wire is L and area of cross-section is A . The increase in length is l on applying the force F on its two ends. Which of the statement is correct [NCERT 1976]
 - (a) Increase in length is inversely proportional to its length L
 - (b) Increase in length is proportional to area of cross-section A
 - (c) Increase in length is inversely proportional to A
 - (d) Increase in length is proportional to Young's modulus
2. The increase in length is l of a wire of length L by the longitudinal stress. Then the stress is proportional to [MP PET 1986]
 - (a) L/l
 - (b) l/L
 - (c) $l \times L$
 - (d) $l^2 \times L$
3. The dimensions of four wires of the same material are given below. In which wire the increase in length will be maximum when the same tension is applied [IIT 1981; NCERT 1976; MP PET/PMT 1998; CPMT 1983, 90; MP PMT 1992, 94, 97; MP PET 1989, 90, 99]
 - (a) Length 100 cm, Diameter 1 mm
 - (b) Length 200 cm, Diameter 2 mm
 - (c) Length 300 cm, Diameter 3 mm
 - (d) Length 50 cm, Diameter 0.5 mm

458 Elasticity

4. The ratio of the lengths of two wires A and B of same material is 1 : 2 and the ratio of their diameter is 2 : 1. They are stretched by the same force, then the ratio of increase in length will be [MP PMT 1986; MP PET/PMT 1988]
- (a) 2 : 1 (b) 1 : 4
(c) 1 : 8 (d) 8 : 1
5. The Young's modulus of a wire of length L and radius r is Y N/m. If the length and radius are reduced to $L/2$ and $r/2$, then its Young's modulus will be [MP PMT 1985; MP PET 1997; KCET 1999]
- (a) $Y/2$ (b) Y
(c) $2Y$ (d) $4Y$
6. A beam of metal supported at the two ends is loaded at the centre. The depression at the centre is proportional to [CPMT 1983, 84]
- (a) Y^2 (b) Y
(c) $1/Y$ (d) $1/Y^2$
7. When a certain weight is suspended from a long uniform wire, its length increases by one cm. If the same weight is suspended from another wire of the same material and length but having a diameter half of the first one then the increase in length will be
- (a) 0.5 cm (b) 2 cm
(c) 4 cm (d) 8 cm
8. Hook's law defines [MP PMT/PET 1988]
- (a) Stress (b) Strain
(c) Modulus of elasticity (d) Elastic limit
9. A wire is loaded by 6 kg at its one end, the increase in length is 12 mm. If the radius of the wire is doubled and all other magnitudes are unchanged, then increase in length will be [MP PMT 1987; AI SSCE 1982]
- (a) 6 mm (b) 3 mm
(c) 24 mm (d) 48 mm
10. The area of cross-section of a wire of length 1.1 metre is 1 mm². It is loaded with 1 kg. If Young's modulus of copper is 1.1×10^{11} N/m², then the increase in length will be (If $g = 10$ m/s²) [MP PET 1989]
- (a) 0.01 mm (b) 0.075 mm
(c) 0.1 mm (d) 0.15 mm
11. On increasing the length by 0.5 mm in a steel wire of length 2 m and area of cross-section 2 mm², the force required is [Y for steel = 2.2×10^{11} N/m²] [MP PET/PMT 1988]
- (a) 1.1×10^5 N (b) 1.1×10^4 N
(c) 1.1×10^3 N (d) 1.1×10^2 N
12. If Young's modulus of iron is 2×10^{11} N/m² and the interatomic spacing between two molecules is 3×10^{-10} metre, the interatomic force constant is [JIPMER 1978]
- (a) 60 N/m (b) 120 N/m
(c) 30 N/m (d) 180 N/m
13. In CGS system, the Young's modulus of a steel wire is 2×10^{12} . To double the length of a wire of unit cross-section area, the force required is [MP PMT 1989]
- (a) 4×10^6 dynes (b) 2×10^{12} dynes
(c) 2×10^{12} newtons (d) 2×10^8 dynes
14. The material which practically does not show elastic after effect is [JIPMER 1997]
- (a) Copper (b) Rubber
(c) Steel (d) Quartz
15. If the temperature increases, the modulus of elasticity
- (a) Decreases (b) Increases
(c) Remains constant (d) Becomes zero
16. A force F is needed to break a copper wire having radius R . The force needed to break a copper wire of radius $2R$ will be [MP PET 1990]
- (a) $F/2$ (b) $2F$
(c) $4F$ (d) $F/4$
17. The relationship between Young's modulus Y , Bulk modulus K and modulus of rigidity η is [MP PET 1991; MP PMT 1997]
- (a) $Y = \frac{9\eta K}{3 + K}$ (b) $\frac{9YK}{Y + 3K}$
(c) $Y = \frac{9\eta K}{3 + K}$ (d) $Y = \frac{3\eta K}{9\eta + K}$
18. The diameter of a brass rod is 4 mm and Young's modulus of brass is 9×10^{10} N/m². The force required to stretch by 0.1% of its length is [MP PET 1991; BVP 2003]
- (a) 360π N (b) 36 N
(c) $144 \pi \times 10^3$ N (d) $36 \pi \times 10^5$ N
19. If x longitudinal strain is produced in a wire of Young's modulus y , then energy stored in the material of the wire per unit volume is [MP PMT 1987, 89, 92; CPMT 1997; Pb. PMT 1999; KCET 2000; AIIMS 2001]
- (a) yx^2 (b) $2yx^2$
(c) $\frac{1}{2}y^2x$ (d) $\frac{1}{2}yx^2$
20. In a wire of length L , the increase in its length is l . If the length is reduced to half, the increase in its length will be
- (a) l (b) $2l$
(c) $\frac{l}{2}$ (d) None of the above
21. The Young's modulus of a rubber string 8 cm long and density 1.5 kg/m^3 is 5×10^8 N/m², is suspended on the ceiling in a room. The increase in length due to its own weight will be
- (a) 9.6×10^{-5} m (b) 9.6×10^{-11} m
(c) 9.6×10^{-3} m (d) 9.6 m
22. A and B are two wires. The radius of A is twice that of B . They are stretched by the same load. Then the stress on B is [MP PMT 1993]
- (a) Equal to that on A (b) Four times that on A
(c) Two times that on A (d) Half that on A

23. If the length of a wire is reduced to half, then it can hold the load
 (a) Half (b) Same
 (c) Double (d) One fourth
24. To double the length of a iron wire having 0.5 cm^2 area of cross-section, the required force will be ($Y = 10^{12} \text{ dyne / cm}^2$)
 (a) $1.0 \times 10^{-7} \text{ N}$ (b) $1.0 \times 10^7 \text{ N}$
 (c) $0.5 \times 10^{-7} \text{ N}$ (d) $0.5 \times 10^{12} \text{ dyne}$
25. The spring balance does not read properly after its long use, because
 (a) The elasticity of spring increases
 (b) The elasticity decreases
 (c) Its plastic power decreases
 (d) Its plastic power increases
26. Two wires of equal lengths are made of the same material. Wire A has a diameter that is twice as that of wire B. If identical weights are suspended from the ends of these wires, the increase in length is
 [EAMCET 1983; MP PMT 1990; MP PET 1995]
 (a) Four times for wire A as for wire B
 (b) Twice for wire A as for wire B
 (c) Half for wire A as for wire B
 (d) One-fourth for wire A as for wire B
27. Why the spring is made up of steel in comparison of copper
 (a) Copper is more costly than steel
 (b) Copper is more elastic than steel
 (c) Steel is more elastic than copper
 (d) None of the above
28. Steel and copper wires of same length are stretched by the same weight one after the other. Young's modulus of steel and copper are $2 \times 10^{11} \text{ N / m}^2$ and $1.2 \times 10^{11} \text{ N / m}^2$. The ratio of increase in length
 [MP PET 1984]
 (a) $\frac{2}{5}$ (b) $\frac{3}{5}$
 (c) $\frac{5}{4}$ (d) $\frac{5}{2}$
29. An area of cross-section of rubber string is 2 cm^2 . Its length is doubled when stretched with a linear force of $2 \times 10^5 \text{ dynes}$. The Young's modulus of the rubber in dyne / cm^2 will be
 (a) 4×10^5 (b) 1×10^5
 (c) 2×10^5 (d) 1×10^4
30. Increase in length of a wire is 1 mm when suspended by a weight. If the same weight is suspended on a wire of double its length and double its radius, the increase in length will be
 [CPMT 1976]
 (a) 2 mm (b) 0.5 mm
 (c) 4 mm (d) 0.25 mm
31. The temperature of a wire of length 1 metre and area of cross-section 1 cm^2 is increased from 0°C to 100°C . If the rod is not allowed to increase in length, the force required will be ($\alpha = 10^{-5} / ^\circ\text{C}$ and $Y = 10^{11} \text{ N / m}^2$)
 [NCERT 1976; CPMT 1982, 91]
 (a) 10^3 N (b) 10^4 N
 (c) 10^5 N (d) 10^9 N
32. A rod of length l and area of cross-section A is heated from 0°C to 100°C . The rod is so placed that it is not allowed to increase in length, then the force developed is proportional to
 (a) l (b) l^{-1}
 (c) A [MP PMT 1987] (d) A^{-1}
33. An aluminum rod (Young's modulus $= 7 \times 10^9 \text{ N / m}^2$) has a breaking strain of 0.2% . The minimum cross-sectional area of the rod in order to support a load of 10^4 Newton's is
 [MP PMT 1991]
 (a) $1 \times 10^{-2} \text{ m}^2$ (b) $1.4 \times 10^{-3} \text{ m}^2$
 (c) $3.5 \times 10^{-3} \text{ m}^2$ (d) $7.1 \times 10^{-4} \text{ m}^2$
34. Two wires of copper having the length in the ratio $4 : 1$ and their radii ratio as $1 : 4$ are stretched by the same force. The ratio of longitudinal strain in the two will be
 (a) $1 : 16$ (b) $16 : 1$
 (c) $1 : 64$ (d) $64 : 1$
35. A weight of 200 kg is suspended by vertical wire of length 600.5 cm . The area of cross-section of wire is 1 mm^2 . When the load is removed, the wire contracts by 0.5 cm . The Young's modulus of the material of wire will be
 (a) $2.35 \times 10^{12} \text{ N / m}^2$ (b) $1.35 \times 10^{10} \text{ N / m}^2$
 (c) $13.5 \times 10^{11} \text{ N / m}^2$ (d) $23.5 \times 10^9 \text{ N / m}^2$
36. If a load of 9 kg is suspended on a wire, the increase in length is 4.5 mm . The force constant of the wire is
 (a) $0.49 \times 10^4 \text{ N / m}$ (b) $1.96 \times 10^4 \text{ N / m}$
 (c) $4.9 \times 10^4 \text{ N / m}$ (d) $0.196 \times 10^4 \text{ N / m}$
37. The ratio of diameters of two wires of same material is $n : 1$. The length of wires are 4 m each. On applying the same load, the increase in length of thin wire will be
 (a) n^2 times (b) n times
 (c) $2n$ times (d) None of the above
38. Longitudinal stress of 1 kg / mm^2 is applied on a wire. The percentage increase in length is ($Y = 10^{11} \text{ N / m}^2$)
 [MP PET 1985]
 (a) 0.002 (b) 0.001
 (c) 0.003 (d) 0.01
39. A steel wire is stretched with a definite load. If the Young's modulus of the wire is Y . For decreasing the value of Y
 (a) Radius is to be decreased
 (b) Radius is to be increased
 (c) Length is to be increased
 (d) None of the above
40. The interatomic distance for a metal is $3 \times 10^{-10} \text{ m}$. If the interatomic force constant is $3.6 \times 10^{-9} \text{ N / \AA}$, then the Young's modulus in N / m^2 will be
 (a) 1.2×10^{11} (b) 4.2×10^{11}
 (c) 10.8×10^{-19} (d) 2.4×10^{10}

41. Two identical wires of rubber and iron are stretched by the same weight, then the number of atoms in the iron wire will be
 (a) Equal to that of rubber
 (b) Less than that of the rubber
 (c) More than that of the rubber
 (d) None of the above
42. The force constant of a wire does not depend on
 (a) Nature of the material (b) Radius of the wire
 (c) Length of the wire (d) None of the above
43. The elasticity of *invar*
 (a) Increases with temperature rise
 (b) Decreases with temperature rise
 (c) Does not depend on temperature
 (d) None of the above
44. After effects of elasticity are maximum for
 (a) Glass (b) Quartz
 (c) Rubber (d) Metal
45. In suspended type moving coil galvanometer, quartz suspension is used because
 (a) It is good conductor of electricity
 (b) Elastic after effects are negligible
 (c) Young's modulus is greater
 (d) There is no elastic limit
46. A force of 200 N is applied at one end of a wire of length 2 m and having area of cross-section 10^{-2} cm^2 . The other end of the wire is rigidly fixed. If coefficient of linear expansion of the wire $\alpha = 8 \times 10^{-6} / ^\circ\text{C}$ and Young's modulus $Y = 2.2 \times 10^{11} \text{ N/m}^2$ and its temperature is increased by 5°C , then the increase in the tension of the wire will be
 (a) 4.2 N (b) 4.4 N
 (c) 2.4 N (d) 8.8 N
47. When compared with solids and liquids, the gases have
 (a) Minimum volume elasticity
 (b) Maximum volume elasticity
 (c) Maximum Young's modulus
 (d) Maximum modulus of rigidity
48. The length of a wire is 1.0 m and the area of cross-section is $1.0 \times 10^{-2} \text{ cm}^2$. If the work done for increase in length by 0.2 cm is 0.4 joule, then Young's modulus of the material of the wire is
 (a) $2.0 \times 10^{10} \text{ N/m}^2$ (b) $4 \times 10^{10} \text{ N/m}^2$
 (c) $2.0 \times 10^{11} \text{ N/m}^2$ (d) $2 \times 10^{10} \text{ N/m}^2$
49. The quality of the material which opposes the change in shape, volume or length is called
 (a) Intermolecular repulsion
 (b) Intermolecular behaviour
 (c) Viscosity
 (d) Elasticity
50. For silver, Young's modulus is $7.25 \times 10^{10} \text{ N/m}^2$ and Bulk modulus is $11 \times 10^{10} \text{ N/m}^2$. Its Poisson's ratio will be
 (a) -1 (b) 0.5
 (c) 0.39 (d) 0.25
51. The longitudinal strain is only possible in
 (a) Gases (b) Fluids
 (c) Solids (d) Liquids
52. If the density of the material increases, the value of Young's modulus
 (a) Increases
 (b) Decreases
 (c) First increases then decreases
 (d) First decreases then increases
53. Young's modulus of rubber is 10^4 N/m^2 and area of cross-section is 2 cm^2 . If force of 2×10^5 dynes is applied along its length, then its initial length l becomes
 (a) $3l$ (b) $4l$
 (c) $2l$ (d) None of the above
54. The elastic limit for a gas
 (a) Exists
 (b) Exists only at absolute zero
 (c) Exists for a perfect gas
 (d) Does not exist
55. If Young's modulus for a material is zero, then the state of material should be
 (a) Solid (b) Solid but powder
 (c) Gas (d) None of the above
56. Liquids have no Poisson's ratio, because
 (a) It has no definite shape
 (b) It has greater volume
 (c) It has lesser density than solid
 (d) None of the above
57. A wire of length L and radius r is rigidly fixed at one end. On stretching the other end of the wire with a force F , the increase in its length is l . If another wire of same material but of length $2L$ and radius $2r$ is stretched with a force of $2F$, the increase in its length will be
 [NCERT 1980; AIIMS 1980; MP PET 1989, 92; MP PET/PMT 1988; MP PMT 1996, 2002; UPSEAT 2002]
 (a) l (b) $2l$
 (c) $\frac{l}{2}$ (d) $\frac{l}{4}$
58. In steel, the Young's modulus and the strain at the breaking point are $2 \times 10^{11} \text{ Nm}^{-2}$ and 0.15 respectively. The stress at the breaking point for steel is therefore
 [MP PET 1990; MP PMT 1992; DPMT 2001]
 (a) $1.33 \times 10^{11} \text{ Nm}^{-2}$ (b) $1.33 \times 10^{12} \text{ Nm}^{-2}$
 (c) $7.5 \times 10^{-13} \text{ Nm}^{-2}$ (d) $3 \times 10^{10} \text{ Nm}^{-2}$
59. Which of the following statements is correct [MP PET 1992]
 (a) Hooke's law is applicable only within elastic limit

- (b) The adiabatic and isothermal elastic constants of a gas are equal
(c) Young's modulus is dimensionless
(d) Stress multiplied by strain is equal to the stored energy
60. The force required to stretch a steel wire of 1 cm^2 cross-section to 1.1 times its length would be ($Y = 2 \times 10^{11} \text{ Nm}^{-2}$) [MP PET 1992]
- (a) $2 \times 10^6 \text{ N}$ (b) $2 \times 10^3 \text{ N}$
(c) $2 \times 10^{-6} \text{ N}$ (d) $2 \times 10^{-7} \text{ N}$
61. Which one of the following substances possesses the highest elasticity [MP PMT 1992; RPMT 1999; RPET 2000; MH CET (Med.) 2001]
- (a) Rubber (b) Glass
(c) Steel (d) Copper
62. Which one of the following quantities does not have the unit of force per unit area [MP PMT 1992]
- (a) Stress
(b) Strain
(c) Young's modulus of elasticity
(d) Pressure
63. A copper wire and a steel wire of the same diameter and length are connected end to end and a force is applied, which stretches their combined length by 1 cm. The two wires will have
- (a) Different stresses and strains
(b) The same stress and strain
(c) The same strain but different stresses
(d) The same stress but different strains
64. A steel ring of radius r and cross-section area ' A ' is fitted on to a wooden disc of radius R ($R > r$). If Young's modulus be E , then the force with which the steel ring is expanded is [EAMCET 1986]
- (a) $AE \frac{R}{r}$ (b) $AE \left(\frac{R-r}{r} \right)$
(c) $\frac{E}{A} \left(\frac{R-r}{A} \right)$ (d) $\frac{Er}{AR}$
65. A wire extends by 1 mm when a force is applied. Double the force is applied to another wire of same material and length but half the radius of cross-section. The elongation of the wire in mm will be
- (a) 8 (b) 4
(c) 2 (d) 1
66. Two wires of the same material have lengths in the ratio 1 : 2 and their radii are in the ratio $1 : \sqrt{2}$. If they are stretched by applying equal forces, the increase in their lengths will be in the ratio
- (a) $2 : \sqrt{2}$ (b) $\sqrt{2} : 2$
(c) 1 : 1 (d) 1 : 2
67. When a weight of 10 kg is suspended from a copper wire of length 3 metres and diameter 0.4 mm, its length increases by 2.4 cm. If the diameter of the wire is doubled, then the extension in its length will be [MP PMT 1994]
- (a) 9.6 cm (b) 4.8 cm
(c) 1.2 cm (d) 0.6 cm
68. A force of 10^3 newton stretches the length of a hanging wire by 1 millimetre. The force required to stretch a wire of same material and length but having four times the diameter by 1 millimetre is
- (a) $4 \times 10^3 \text{ N}$ (b) $16 \times 10^3 \text{ N}$
(c) $\frac{1}{4} \times 10^3 \text{ N}$ (d) $\frac{1}{16} \times 10^3 \text{ N}$
69. Two wires 'A' and 'B' of the same material have radii in the ratio 2 : 1 and lengths in the ratio 4 : 1. The ratio of the normal forces required to produce the same change in the lengths of these two wires is [Haryana CEE 1996]
- (a) 1 : 1 (b) 2 : 1
(c) 1 : 4 (d) 1 : 2
70. Density of rubber is d . A thick rubber cord of length L and cross-section area A undergoes elongation under its own weight on suspending it. This elongation is proportional to
- (a) dL (b) Ad/L
(c) Ad/L^2 (d) dL^2
71. The ratio of two specific heats of gas C_p/C_v for argon is 1.6 and for hydrogen is 1.4. Adiabatic elasticity of argon at pressure P is E . Adiabatic elasticity of hydrogen will also be equal to E at the pressure
- (a) P [MP PMT 1992] (b) $\frac{8}{7}P$
(c) $\frac{7}{8}P$ (d) $1.4P$
72. The relation between γ, η and K for a elastic material is
- (a) $\frac{1}{\eta} = \frac{1}{3\gamma} + \frac{1}{9K}$ (b) $\frac{1}{K} = \frac{1}{3\gamma} + \frac{1}{9\eta}$
(c) $\frac{1}{\gamma} = \frac{1}{3K} + \frac{1}{9\eta}$ (d) $\frac{1}{\gamma} = \frac{1}{3\eta} + \frac{1}{9K}$
73. A fixed volume of iron is drawn into a wire of length L . The extension x produced in this wire by a constant force F is proportional to [MP PMT 1999]
- (a) $\frac{1}{L^2}$ (b) $\frac{1}{L}$
(c) L^2 (d) L
74. A wire of cross-sectional area 3 mm^2 is first stretched between two fixed points at a temperature of 20°C . Determine the tension when the temperature falls to 10°C . Coefficient of linear expansion $\alpha = 10^{-5}^\circ\text{C}^{-1}$ and $Y = 2 \times 10^{11} \text{ N/m}^2$ [EAMCET 1986]
- (a) 20 N (b) 30 N
(c) 60 N [MP PET 1994] (d) 120 N
75. To keep constant time, watches are fitted with balance wheel made of [EAMCET 1994]
- (a) Invar (b) Stainless steel
(c) Tungsten (d) Platinum
76. A wire is stretched by 0.01 m by a certain force F . Another wire of same material whose diameter and length are double to the original wire is stretched by the same force. Then its elongation will be [EAMCET (Engg.)

- (a) 0.005 m (b) 0.01 m [AFMC 1999]
 (c) 0.02 m (d) 0.002 m
77. The possible value of Poisson's ratio is [EAMCET (Med.) 1995]
 (a) 1 (b) 0.9
 (c) 0.8 (d) 0.4
78. The coefficient of linear expansion of brass and steel are α_1 and α_2 . If we take a brass rod of length l_1 and steel rod of length l_2 at 0°C , their difference in length ($l_2 - l_1$) will remain the same at a temperature if [EAMCET (Med.) 1995]
 (a) $\alpha_1 l_2 = \alpha_2 l_1$ (b) $\alpha_1 l_2^2 = \alpha_2 l_1^2$
 (c) $\alpha_1^2 l_1 = \alpha_2^2 l_2$ (d) $\alpha_1 l_1 = \alpha_2 l_2$
79. A rod is fixed between two points at 20°C . The coefficient of linear expansion of material of rod is $1.1 \times 10^{-5} / ^\circ\text{C}$ and Young's modulus is $1.2 \times 10^{11} \text{ N/m}$. Find the stress developed in the rod if temperature of rod becomes 10°C [RPET 1997]
 (a) $1.32 \times 10^7 \text{ N/m}^2$ (b) $1.10 \times 10^{15} \text{ N/m}^2$
 (c) $1.32 \times 10^8 \text{ N/m}^2$ (d) $1.10 \times 10^6 \text{ N/m}^2$
80. The extension of a wire by the application of load is 3 mm . The extension in a wire of the same material and length but half the radius by the same load is [CMEET Bihar 1995]
 (a) 12 mm (b) 0.75 mm
 (c) 15 mm (d) 6 mm
81. A rubber pipe of density $1.5 \times 10^3 \text{ N/m}^2$ and Young's modulus $5 \times 10^6 \text{ N/m}^2$ is suspended from the roof. The length of the pipe is 8 m . What will be the change in length due to its own weight
 (a) 9.6 m (b) $9.6 \times 10^3 \text{ m}$
 (c) $19.2 \times 10^{-2} \text{ m}$ (d) $9.6 \times 10^{-2} \text{ m}$
82. In which case there is maximum extension in the wire, if same force is applied on each wire [AFMC 1997]
 (a) $L = 500 \text{ cm}$, $d = 0.05 \text{ mm}$
 (b) $L = 200 \text{ cm}$, $d = 0.02 \text{ mm}$
 (c) $L = 300 \text{ cm}$, $d = 0.03 \text{ mm}$
 (d) $L = 400 \text{ cm}$, $d = 0.01 \text{ mm}$
83. If a spring is extended to length l , then according to Hook's law
 (a) $F = kl$ (b) $F = \frac{k}{l}$
 (c) $F = k^2 l$ (d) $F = \frac{k^2}{l}$
84. Which of the following affects the elasticity of a substance [AIIMS 1999]
 (a) Hammering and annealing
 (b) Change in temperature
 (c) Impurity in substance
 (d) All of these
85. An iron rod of length 2 m and cross section area of 50 mm^2 , stretched by 0.5 mm , when a mass of 250 kg is hung from its lower end. Young's modulus of the iron rod is
 (a) $19.6 \times 10^{10} \text{ N/m}^2$ (b) $19.6 \times 10^{15} \text{ N/m}^2$
 (c) $19.6 \times 10^{18} \text{ N/m}^2$ (d) $19.6 \times 10^{20} \text{ N/m}^2$
86. In solids, inter-atomic forces are [DCE 1999]
 (a) Totally repulsive
 (b) Totally attractive
 (c) Combination of (a) and (b)
 (d) None of these
87. A force F is applied on the wire of radius r and length L and change in the length of wire is l . If the same force F is applied on the wire of the same material and radius $2r$ and length $2L$, Then the change in length of the other wire is [RPMT 1999]
 (a) l (b) $2l$
 (c) $l/2$ (d) $4l$
88. The modulus of elasticity is dimensionally equivalent to [MH CET (Med.) 1999]
 (a) Surface tension (b) Stress
 (c) Strain (d) None of these
89. Under elastic limit the stress is [MH CET 1999; KCET 1999]
 (a) Inversely, proportional to strain
 (b) Directly proportional to strain
 (c) Square root of strain
 (d) Independent of strain
90. A steel wire of 1 m long and 1 mm^2 cross section area is hang from rigid end. When weight of 1 kg is hung from it then change in length will be (given $Y = 2 \times 10^{11} \text{ N/m}^2$) [RPET 1996]
 (a) 0.5 mm (b) 0.25 mm
 (c) 0.05 mm (d) 5 mm
91. A load W produces an extension of 1 mm in a thread of radius r . Now if the load is made $4W$ and radius is made $2r$ all other things remaining same, the extension will become [RPET 2000]
 (a) 4 mm [CPMT 1997] (b) 16 mm
 (c) 1 mm (d) 0.25 mm
92. The units of Young 's modulus of elasticity are [CPMT 2000; KCET 2000]
 (a) Nm^{-1} (b) N-m
 (c) Nm^{-2} (d) N-m^2
93. Two similar wires under the same load yield elongation of 0.1 mm and 0.05 mm respectively. If the area of cross- section of the first wire is 4 mm^2 , then the area of cross section of the second wire is [CPMT 2000]
 (a) 6 mm^2 (b) 8 mm^2
 (c) 10 mm^2 (d) 12 mm^2

94. A 5 m long aluminium wire ($Y = 7 \times 10^{10} \text{ N/m}^2$) of diameter 3 mm supports a 40 kg mass. In order to have the same elongation in a copper wire ($Y = 12 \times 10^{10} \text{ N/m}^2$) of the same length under the same weight, the diameter should now be, in mm.
- (a) 1.75 (b) 1.5
(c) 2.5 (d) 5.0
95. How much force is required to produce an increase of 0.2% in the length of a brass wire of diameter 0.6 mm
- [MP PMT 2000]
- (Young's modulus for brass = $0.9 \times 10^{11} \text{ N/m}^2$)
- (a) Nearly 17 N (b) Nearly 34 N
(c) Nearly 51 N (d) Nearly 68 N
96. On applying a stress of $20 \times 10^8 \text{ N/m}^2$ the length of a perfectly elastic wire is doubled. Its Young's modulus will be
- [MP PET 2000]
- (a) $40 \times 10^8 \text{ N/m}^2$ (b) $20 \times 10^8 \text{ N/m}^2$
(c) $10 \times 10^8 \text{ N/m}^2$ (d) $5 \times 10^8 \text{ N/m}^2$
97. When a uniform wire of radius r is stretched by a 2 kg weight, the increase in its length is 2.00 mm. If the radius of the wire is $r/2$ and other conditions remain the same, the increase in its length is [EAMCET (Engg.) 2000]
- (a) 2.00 mm (b) 4.00 mm
(c) 6.00 mm (d) 8.00 mm
98. The length of an elastic string is a metre when the longitudinal tension is 4 N and b metre when the longitudinal tension is 5 N. The length of the string in metre when the longitudinal tension is 9 N is [EAMCET 2001]
- (a) $a - b$ (b) $5b - 4a$
(c) $2b - \frac{1}{4}a$ (d) $4a - 3b$
99. Stress to strain ratio is equivalent to [RPET 2001]
- (a) Modulus of elasticity
(b) Poisson's Ratio
(c) Rayhold number
(d) Fund number
100. Which is correct relation [RPET 2001]
- (a) $Y < \sigma$ (b) $Y > \sigma$
(c) $Y = \sigma$ (d) $\sigma = +1$
101. If the interatomic spacing in a steel wire is 3.0 \AA and $Y_{\text{steel}} = 20 \times 10^{10} \text{ N/m}^2$ then force constant is
- [RPET 2001]
- (a) $6 \times 10^{-2} \text{ N/\AA}$ (b) $6 \times 10^{-9} \text{ N/\AA}$
(c) $4 \times 10^{-5} \text{ N/\AA}$ (d) $6 \times 10^{-5} \text{ N/\AA}$
102. A copper wire of length 4.0 m and area of cross-section 1.2 cm^2 is stretched with a force of $4.8 \times 10^3 \text{ N}$. If Young's modulus for copper is $1.2 \times 10^{11} \text{ N/m}^2$, the increase in the length of the wire will be
- [MP PET 2001]
- (a) 1.33 mm (b) 1.33 cm
(c) 2.66 mm (d) 2.66 cm
103. A metal bar of length L and area of cross-section A is clamped between two rigid supports. For the material of the rod, its Young's modulus is Y and coefficient of linear expansion is α . If the temperature of the rod is increased by $\Delta t^\circ \text{C}$, the force exerted by the rod on the supports is
- [MP PMT 2001]
- (a) $Y A L \Delta t$ (b) $Y A \alpha \Delta t$
(c) $\frac{Y L \alpha \Delta t}{A}$ (d) $Y \alpha A L \Delta t$
104. According to Hook's law of elasticity, if stress is increased, the ratio of stress to strain [KCET 2000 AIIMS 2001]
- (a) Increases (b) Decreases
(c) Becomes zero (d) Remains constant
105. A pan with set of weights is attached with a light spring. When disturbed, the mass-spring system oscillates with a time period of 0.6 s. When some additional weights are added then time period is 0.7 s. The extension caused by the additional weights is approximately given by
- [UPSEAT 2002]
- (a) 1.38 cm (b) 3.5 cm
(c) 1.75 cm (d) 2.45 cm
106. A uniform plank of Young's modulus Y is moved over a smooth horizontal surface by a constant horizontal force F . The area of cross section of the plank is A . The compressive strain on the plank in the direction of the force is
- [Kerala PET 2002]
- (a) F / AY (b) $2F / AY$
(c) $\frac{1}{2}(F / AY)$ (d) $3F / AY$
107. The mean distance between the atoms of iron is $3 \times 10^{-10} \text{ m}$ and interatomic force constant for iron is 7 N/m . The Young's modulus of elasticity for iron is [JIPMER 2002]
- (a) $2.33 \times 10^5 \text{ N/m}^2$ (b) $23.3 \times 10^{10} \text{ N/m}^2$
(c) $233 \times 10^{10} \text{ N/m}^2$ (d) $2.33 \times 10^{10} \text{ N/m}^2$
108. Two wires A and B are of same materials. Their lengths are in the ratio 1 : 2 and diameters are in the ratio 2 : 1 when stretched by force F_A and F_B respectively they get equal increase in their lengths. Then the ratio F_A / F_B should be
- [Orissa JEE 2002]
- (a) 1 : 2 (b) 1 : 1
(c) 2 : 1 (d) 8 : 1
109. The breaking stress of a wire depends upon [AIIMS 2002]
- (a) Length of the wire
(b) Radius of the wire
(c) Material of the wire
(d) Shape of the cross section

464 Elasticity

110. The area of cross section of a steel wire ($Y = 2.0 \times 10^{11} \text{ N/m}^2$) is 0.1 cm^2 . The force required to double its length will be
- (a) $2 \times 10^{12} \text{ N}$ (b) $2 \times 10^{11} \text{ N}$
(c) $2 \times 10^{10} \text{ N}$ (d) $2 \times 10^6 \text{ N}$
111. A rubber cord catapult has cross-sectional area 25 mm^2 and initial length of rubber cord is 10 cm . It is stretched to 5 cm . and then released to project a missile of mass 5 gm . Taking $Y_{\text{rubber}} = 5 \times 10^8 \text{ N/m}^2$ velocity of projected missile is [CPMT 2002]
- (a) 20 ms^{-1} (b) 100 ms^{-1}
(c) 250 ms^{-1} (d) 200 ms^{-1}
112. According to Hook's law force is proportional to [RPET 2003]
- (a) $\frac{1}{x}$ (b) $\frac{1}{x^2}$
(c) x (d) x^2
113. In the Young's experiment, If length of wire and radius both are doubled then the value of Y will become [RPET 2003]
- (a) 2 times (b) 4 times
(c) Remains same (d) Half
114. Minimum and maximum values of Poisson's ratio for a metal lies between
- (a) $-\infty$ to $+\infty$ (b) 0 to 1
(c) $-\infty$ to 1 (d) 0 to 0.5
115. A wire of diameter 1 mm breaks under a tension of 1000 N . Another wire, of same material as that of the first one, but of diameter 2 mm breaks under a tension of [Orissa JEE 2003]
- (a) 500 N (b) 1000 N
(c) 10000 N (d) 4000 N
116. Young's modulus of perfectly rigid body material is [KCET 2003]
- (a) Zero (b) Infinity
(c) $1 \times 10^{10} \text{ N/m}^2$ (d) $10 \times 10^{10} \text{ N/m}^2$
117. A wire of length 2 m is made from 10 cm^3 of copper. A force F is applied so that its length increases by 2 mm . Another wire of length 8 m is made from the same volume of copper. If the force F is applied to it, its length will increase by
- (a) 0.8 cm (b) 1.6 cm
(c) 2.4 cm (d) 3.2 cm
118. A wire of cross section 4 mm is stretched by 0.1 mm by a certain weight. How far (length) will be wire of same material and length but of area 8 mm stretch under the action of same force
- (a) 0.05 mm (b) 0.10 mm
(c) 0.15 mm (d) 0.20 mm
(e) 0.25 mm
119. A substance breaks down by a stress of 10^7 N/m^2 . If the density of the material of the wire is $3 \times 10^4 \text{ kg/m}$, then the length of the wire of the substance which will break under its own weight when suspended vertically, is [DPMPT 2004]
- (a) 66.6 m [MP PET 2002] (b) 60.0 m
(c) 33.3 m (d) 30.0 m
120. A rubber cord 10 m long is suspended vertically. How much does it stretch under its own weight (Density of rubber is 1500 kg/m , $Y = 5 \times 10^8 \text{ N/m}$, $g = 10 \text{ m/s}^2$) [Pb. PET 2001]
- (a) $15 \times 10^{-4} \text{ m}$ (b) $7.5 \times 10^{-4} \text{ m}$
(c) $12 \times 10^{-4} \text{ m}$ (d) $25 \times 10^{-4} \text{ m}$
121. The value of Poisson's ratio lies between [AIIMS 1985; MP PET 1986; DPMT 2002]
- (a) -1 to $\frac{1}{2}$ (b) $-\frac{3}{4}$ to $-\frac{1}{2}$
(c) $-\frac{1}{2}$ to 1 (d) 1 to 2
122. The Poisson's ratio cannot have the value [EAMCET 1989]
- (a) 0.7 (b) 0.2
(c) 0.1 (d) 0.5
123. There is no change in the volume of a wire due to change in its length on stretching. The Poisson's ratio of the material of the wire is [MH CET 2004]
- (a) $+0.50$ (b) -0.50
(c) 0.25 (d) -0.25
124. A material has Poisson's ratio 0.50. If a uniform rod of it suffers a longitudinal strain of 2×10^{-3} , then the percentage change in volume is [EAMCET 1987]
- (a) 0.6 [Orissa JEE 2003] (b) 0.4
(c) 0.2 (d) Zero
125. Four identical rods are stretched by same force. Maximum extension is produced in
- (a) $L = 10 \text{ cm}, D = 1 \text{ mm}$ (b) $L = 100 \text{ cm}, D = 2 \text{ mm}$
(c) $L = 200 \text{ cm}, D = 3 \text{ mm}$ (d) $L = 300 \text{ cm}, D = 4 \text{ mm}$

Bulk Modulus

1. The isothermal elasticity of a gas is equal to [CPMT 1981; MP PMT 2004]
- (a) Density (b) Volume
(c) Pressure (d) Specific heat
2. The adiabatic elasticity of a gas is equal to [CPMT 1982]
- (a) $\gamma \times \text{density}$ (b) $\gamma \times \text{volume}$
(c) $\gamma \times \text{pressure}$ (d) $\gamma \times \text{specific heat}$
3. The specific heat at constant pressure and at constant volume for an ideal gas are C_p and C_v and its adiabatic and isothermal elasticities are E_ϕ and E_θ respectively. The ratio of E_ϕ to E_θ is [MP PMT 1998]
- (a) C_v / C_p [Kerala PMT 2004] (b) C_p / C_v
(c) $C_p C_v$ (d) $1 / C_p C_v$
4. The only elastic modulus that applies to fluids is [BCECE 2003]
- (a) Young's modulus (b) Shear modulus

- (c) Modulus of rigidity (d) Bulk modulus
5. The ratio of the adiabatic to isothermal elasticities of a triatomic gas is [MP PET 1991]
 (a) $3/4$ (b) $4/3$
 (c) 1 (d) $5/3$
6. If the volume of the given mass of a gas is increased four times, the temperature is raised from 27°C to 127°C . The elasticity will become
 (a) 4 times (b) $1/4$ times
 (c) 3 times (d) $1/3$ times
7. The compressibility of water is 4×10^{-5} per unit atmospheric pressure. The decrease in volume of 100 cubic centimeter of water under a pressure of 100 atmosphere will be
 (a) 0.4 cc (b) 4×10^{-5} cc
 (c) 0.025 cc (d) 0.004 cc
8. If a rubber ball is taken at the depth of 200 m in a pool, its volume decreases by 0.1%. If the density of the water is $1 \times 10^3 \text{ kg/m}^3$ and $g = 10 \text{ m/s}^2$, then the volume elasticity in N/m^2 will be
 (a) 10^8 (b) 2×10^8
 (c) 10^9 (d) 2×10^9
9. The compressibility of a material is
 (a) Product of volume and its pressure
 (b) The change in pressure per unit change in volume strain
 (c) The fractional change in volume per unit change in pressure
 (d) None of the above
10. When a pressure of 100 atmosphere is applied on a spherical ball, then its volume reduces to 0.01%. The bulk modulus of the material of the rubber in dyne/cm^2 is [MP PET 1985; DPMT 2002]
 (a) 10×10^{12} (b) 100×10^{12}
 (c) 1×10^{12} (d) 20×10^{12}
11. In the three states of matter, the elastic coefficient can be
 (a) Young's modulus
 (b) Coefficient of volume elasticity
 (c) Modulus of rigidity
 (d) Poisson's ratio
12. Bulk modulus was first defined by [CPMT 1987]
 (a) Young (b) Bulk
 (c) Maxwell (d) None of the above
13. A uniform cube is subjected to volume compression. If each side is decreased by 1%, then bulk strain is [EAMCET (Engg.) 1995; DPMT 2000]
 (a) 0.01 (b) 0.06
 (c) 0.02 (d) 0.03
14. A ball falling in a lake of depth 200 m shows 0.1% decrease in its volume at the bottom. What is the bulk modulus of the material of the ball [AFMC 1997]
 (a) $19.6 \times 10^8 \text{ N/m}^2$ (b) $19.6 \times 10^{-10} \text{ N/m}^2$
 (c) $19.6 \times 10^{10} \text{ N/m}^2$ (d) $19.6 \times 10^{-8} \text{ N/m}^2$
15. The isothermal bulk modulus of a gas at atmospheric pressure is
 (a) 1 mm of Hg (b) 13.6 mm of Hg
 (c) $1.013 \times 10^5 \text{ N/m}^2$ (d) $2.026 \times 10^5 \text{ N/m}^2$
16. Coefficient of isothermal elasticity E_θ and coefficient of adiabatic elasticity E_ϕ are related by ($\gamma = C_p / C_v$) [MP PET 2000]
 (a) $E_\theta = \gamma E_\phi$ (b) $E_\phi = \gamma E_\theta$
 (c) $E_\theta = \gamma / E_\phi$ (d) $E_\theta = \gamma^2 E_\phi$
17. The bulk modulus of an ideal gas at constant temperature [MP PMT 1990] [MP PMT 2004]
 (a) Is equal to its volume V (b) Is equal to $p/2$
 (c) Is equal to its pressure p (d) Can not be determined
18. The Bulk modulus for an incompressible liquid is [BHU 2004]
 (a) Zero [MP PMT 1991] (b) Unity
 (c) Infinity (d) Between 0 to 1
19. The pressure applied from all directions on a cube is P . How much its temperature should be raised to maintain the original volume? The volume elasticity of the cube is β and the coefficient of volume expansion is α
 (a) $\frac{P}{\alpha\beta}$ (b) $\frac{P\alpha}{\beta}$
 (c) $\frac{P\beta}{\alpha}$ (d) $\frac{\alpha\beta}{P}$
20. The pressure of a medium is changed from $1.01 \times 10^5 \text{ Pa}$ to $1.165 \times 10^5 \text{ Pa}$ and change in volume is 10% keeping temperature constant. The Bulk modulus of the medium is
 (a) $204.8 \times 10^5 \text{ Pa}$ (b) $102.4 \times 10^5 \text{ Pa}$
 (c) $51.2 \times 10^5 \text{ Pa}$ (d) $1.55 \times 10^5 \text{ Pa}$
21. For a constant hydraulic stress on an object, the fractional change in the object's volume $\left(\frac{\Delta V}{V}\right)$ and its bulk modulus (B) are related as
 (a) $\frac{\Delta V}{V} \propto B$ (b) $\frac{\Delta V}{V} \propto \frac{1}{B}$
 (c) $\frac{\Delta V}{V} \propto B^2$ (d) $\frac{\Delta V}{V} \propto B^{-2}$

Rigidity Modulus

1. Modulus of rigidity of diamond is
 (a) Too less
 (b) Greater than all matters
 (c) Less than all matters
 (d) Zero
2. The ratio of lengths of two rods A and B of same material is 1 : 2 and the ratio of their radii is 2 : 1, then the ratio of modulus of rigidity of A and B will be
 (a) 4 : 1 [AIIMS 2000;] (b) 16 : 1

466 Elasticity

- (c) 8 : 1 (d) 1 : 1
3. Which statement is true for a metal [DPMT 2001]
 (a) $Y < \eta$ (b) $Y = \eta$
 (c) $Y > \eta$ (d) $Y < 1/\eta$
4. Which of the following relations is true [CPMT 1984]
 (a) $3Y = K(1 - \sigma)$ (b) $K = \frac{9\eta Y}{Y + \eta}$
 (c) $\sigma = (6K + \eta)Y$ (d) $\sigma = \frac{0.5Y - \eta}{\eta}$
5. Two wires A and B of same length and of the same material have the respective radii r_1 and r_2 . Their one end is fixed with a rigid support, and at the other end equal twisting couple is applied. Then the ratio of the angle of twist at the end of A and the angle of twist at the end of B will be [AIIMS 1980]
 (a) $\frac{r_1^2}{r_2^2}$ (b) $\frac{r_2^2}{r_1^2}$
 (c) $\frac{r_2^4}{r_1^4}$ (d) $\frac{r_1^4}{r_2^4}$
6. When a spiral spring is stretched by suspending a load on it, the strain produced is called
 (a) Shearing (b) Longitudinal
 (c) Volume (d) Transverse
7. The Young's modulus of the material of a wire is $6 \times 10^{12} \text{ N/m}^2$ and there is no transverse strain in it, then its modulus of rigidity will be
 (a) $3 \times 10^{12} \text{ N/m}^2$ (b) $2 \times 10^{12} \text{ N/m}^2$
 (c) 10^{12} N/m^2 (d) None of the above
8. If the Young's modulus of the material is 3 times its modulus of rigidity, then its volume elasticity will be
 (a) Zero (b) Infinity
 (c) $2 \times 10^{10} \text{ N/m}^2$ (d) $3 \times 10^{10} \text{ N/m}^2$
9. Modulus of rigidity of a liquid [RPET 2000]
 (a) Non zero constant
 (b) Infinite
 (c) Zero
 (d) Can not be predicted
10. For a given material, the Young's modulus is 2.4 times that of rigidity modulus. Its Poisson's ratio is [EAMCET 1990; RPET 2001]
 (a) 2.4 (b) 1.2
 (c) 0.4 (d) 0.2
11. A cube of aluminium of sides 0.1 m is subjected to a shearing force of 100 N. The top face of the cube is displaced through 0.02 cm with respect to the bottom face. The shearing strain would be
 (a) 0.02 (b) 0.1
 (c) 0.005 (d) 0.002
12. The reason for the change in shape of a regular body is [EAMCET 1980]
 (a) Volume stress (b) Shearing strain
 (c) Longitudinal strain (d) Metallic strain
13. The lower surface of a cube is fixed. On its upper surface, force is applied at an angle of 30° from its surface. The change will be of the type
 (a) Shape (b) Size
 (c) None (d) Shape and size
14. The upper end of a wire of radius 4 mm and length 100 cm is clamped and its other end is twisted through an angle of 30° . Then angle of shear is [NCERT 1990; MP PMT 1996]
 (a) 12° (b) 0.12°
 (c) 1.2° (d) 0.012°
15. Mark the wrong statement [MP PMT 2003]
 (a) Sliding of molecular layer is much easier than compression or expansion
 (b) Reciprocal of bulk modulus of elasticity is called compressibility
 (c) It is difficult to twist a long rod as compared to small rod
 (d) Hollow shaft is much stronger than a solid rod of same length and same mass
16. A 2 m long rod of radius 1 cm which is fixed from one end is given a twist of 0.8 radians. The shear strain developed will be
 (a) 0.002 (b) 0.004
 (c) 0.008 (d) 0.016
17. A rod of length l and radius r is joined to a rod of length $l/2$ and radius $r/2$ of same material. The free end of small rod is fixed to a rigid base and the free end of larger rod is given a twist of θ° , the twist angle at the joint will be [RPET 1997]
 (a) $\theta/4$ (b) $\theta/2$
 (c) $5\theta/6$ (d) $8\theta/9$
18. Shearing stress causes change in [RPET 2002; BCECE 2001, 04]
 (a) Length (b) Breadth
 (c) Shape (d) Volume

Work Done in Stretching a Wire

1. If the potential energy of a spring is V on stretching it by 2 cm, then its potential energy when it is stretched by 10 cm will be
 (a) $V/25$ (b) $5V$
 (c) $V/5$ (d) $25V$
2. The work done in stretching an elastic wire per unit volume is or strain energy in a stretched string is [NCERT 1981; EAMCET (Med.) 1995; MNR 1981; MP PET 1984; RPMT 1999; DCE 2003]
 (a) Stress \times Strain (b) $\frac{1}{2} \times$ Stress \times Strain
 (c) $2 \times$ strain \times stress (d) Stress/Strain
3. Calculate the work done, if a wire is loaded by ' Mg ' weight and the increase in length is ' l '

[CPMT 1999; DCE 1999, 2001; Pb. PET 2000, 01]

- (a) Mgl (b) Zero
(c) $Mgl/2$ (d) $2Mgl$
4. Two wires of same diameter of the same material having the length l and $2l$. If the force F is applied on each, the ratio of the work done in the two wires will be [MP PET 1989]
(a) 1 : 2 (b) 1 : 4
(c) 2 : 1 (d) 1 : 1
5. A 5 metre long wire is fixed to the ceiling. A weight of 10 kg is hung at the lower end and is 1 metre above the floor. The wire was elongated by 1 mm. The energy stored in the wire due to stretching is [MP PET 1989]
(a) Zero (b) 0.05 joule
(c) 100 joule (d) 500 joule
6. If the force constant of a wire is K , the work done in increasing the length of the wire by l is [MP PMT 1989]
(a) $Kl/2$ (b) Kl
(c) $Kl^2/2$ (d) Kl^2
7. If the tension on a wire is removed at once, then
(a) It will break
(b) Its temperature will reduce
(c) There will be no change in its temperature
(d) Its temperature increases
8. When strain is produced in a body within elastic limit, its internal energy
(a) Remains constant (b) Decreases
(c) Increases (d) None of the above
9. When shearing force is applied on a body, then the elastic potential energy is stored in it. On removing the force, this energy
(a) Converts into kinetic energy
(b) Converts into heat energy
(c) Remains as potential energy
(d) None of the above
10. A brass rod of cross-sectional area 1 cm^2 and length 0.2 m is compressed lengthwise by a weight of 5 kg. If Young's modulus of elasticity of brass is $1 \times 10^{11} \text{ N/m}^2$ and $g = 10 \text{ m/sec}^2$, then increase in the energy of the rod will be
(a) 10^{-5} J (b) $2.5 \times 10^{-5} \text{ J}$
(c) $5 \times 10^{-5} \text{ J}$ (d) $2.5 \times 10^{-4} \text{ J}$
11. If one end of a wire is fixed with a rigid support and the other end is stretched by a force of 10 N, then the increase in length is 0.5 mm. The ratio of the energy of the wire and the work done in displacing it through 1.5 mm by the weight is
(a) $\frac{1}{3}$ (b) $\frac{1}{4}$
(c) $\frac{1}{2}$ (d) 1
12. A wire is suspended by one end. At the other end a weight equivalent to 20 N force is applied. If the increase in length is 1.0 mm, the increase in energy of the wire will be
(a) 0.01 J (b) 0.02 J
(c) 0.04 J (d) 1.00 J
13. In the above question, the ratio of the increase in energy of the wire to the decrease in gravitational potential energy when load moves downwards by 1 mm, will be
(a) 1 (b) $\frac{1}{4}$
(c) $\frac{1}{3}$ (d) $\frac{1}{2}$
14. The Young's modulus of a wire is Y . If the energy per unit volume is E , then the strain will be
(a) $\sqrt{\frac{2E}{Y}}$ (b) $\sqrt{2EY}$
(c) EY (d) $\frac{E}{Y}$
15. The ratio of Young's modulus of the material of two wires is 2 : 3. If the same stress is applied on both, then the ratio of elastic energy per unit volume will be
(a) 3 : 2 (b) 2 : 3
(c) 3 : 4 (d) 4 : 3
16. The length of a rod is 20 cm and area of cross-section 2 cm^2 . The Young's modulus of the material of wire is $1.4 \times 10^{11} \text{ N/m}^2$. If the rod is compressed by 5 kg-wt along its length, then increase in the energy of the rod in joules will be
(a) 8.57×10^{-6} (b) 22.5×10^{-4}
(c) 9.8×10^{-5} (d) 45.0×10^{-5}
17. If a spring extends by x on loading, then the energy stored by the spring is (if T is tension in the spring and k is spring constant)
(a) $\frac{T^2}{2x}$ (b) $\frac{T^2}{2k}$
(c) $\frac{2x}{T^2}$ (d) $\frac{2T^2}{k}$
18. On stretching a wire, the elastic energy stored per unit volume is
(a) $Fl/2AL$ (b) $FA/2L$
(c) $FL/2A$ (d) $FL/2$
19. When a force is applied on a wire of uniform cross-sectional area $3 \times 10^{-6} \text{ m}^2$ and length 4 m, the increase in length is 1 mm. Energy stored in it will be ($Y = 2 \times 10^{11} \text{ N/m}^2$) [MP PMT 1991]
(a) 6250 J (b) 0.177 J
(c) 0.075 J (d) 0.150 J
20. K is the force constant of a spring. The work done in increasing its extension from l_1 to l_2 will be [MP PET 1995; MP PMT 1996]
(a) $K(l_2 - l_1)$ (b) $\frac{K}{2}(l_2 + l_1)$
(c) $K(l_2^2 - l_1^2)$ (d) $\frac{K}{2}(l_2^2 - l_1^2)$

21. When a 4 kg mass is hung vertically on a light spring that obeys Hooke's law, the spring stretches by 2 cm. The work required to be done by an external agent in stretching this spring by 5 cm will be ($g = 9.8 \text{ metres/sec}^2$)
[MP PMT 1995]
- (a) 4.900 joule (b) 2.450 joule
(c) 0.495 joule (d) 0.245 joule
22. A wire of length L and cross-sectional area A is made of a material of Young's modulus Y . It is stretched by an amount x . The work done is
[MP PET 1996; BVP 2003; UPSEAT 2001]
- (a) $\frac{YxA}{2L}$ (b) $\frac{Yx^2 A}{L}$
(c) $\frac{Yx^2 A}{2L}$ (d) $\frac{2Yx^2 A}{L}$
23. The elastic energy stored in a wire of Young's modulus Y is
[MP PMT 1999]
- (a) $Y \times \frac{\text{Strain}^2}{\text{Volume}}$
(b) Stress \times Strain \times Volume
(c) $\frac{\text{Stress}^2 \times \text{Volume}}{2Y}$
(d) $\frac{1}{2} Y \times \text{Stress} \times \text{Strain} \times \text{Volume}$
24. A wire of length 50 cm and cross sectional area of 1 sq. mm is extended by 1 mm. The required work will be ($Y = 2 \times 10^{10} \text{ Nm}^{-2}$)
[RPET 1999]
- (a) $6 \times 10^{-2} \text{ J}$ (b) $4 \times 10^{-2} \text{ J}$
(c) $2 \times 10^{-2} \text{ J}$ (d) $1 \times 10^{-2} \text{ J}$
25. The work per unit volume to stretch the length by 1% of a wire with cross sectional area of 1 mm^2 will be. [$Y = 9 \times 10^{11} \text{ N/m}^2$]
- (a) $9 \times 10^{11} \text{ J}$ (b) $4.5 \times 10^7 \text{ J}$
(c) $9 \times 10^7 \text{ J}$ (d) $4.5 \times 10^{11} \text{ J}$
26. When load of 5 kg is hung on a wire then extension of 3 m takes place, then work done will be [RPMT 2000]
- (a) 75 joule (b) 60 joule
(c) 50 joule (d) 100 joule
27. A stretched rubber has [AIIMS 2000]
- (a) Increased kinetic energy
(b) Increased potential energy
(c) Decreased kinetic energy
(d) Decreased potential energy
28. Which of the following is true for elastic potential energy density
- (a) Energy density = $\frac{1}{2} \times \text{strain} \times \text{stress}$
(b) Energy density = $(\text{strain})^2 \times \text{volume}$
(c) Energy density = $(\text{strain}) \times \text{volume}$
(d) Energy density = $(\text{stress}) \times \text{volume}$
29. A wire suspended vertically from one of its ends is stretched by attaching a weight of 200 N to the lower end. The weight stretches the wire by 1 mm. Then the elastic energy stored in the wire is
- (a) 0.1 J (b) 0.2 J
(c) 10 J (d) 20
30. Wires A and B are made from the same material. A has twice the diameter and three times the length of B. If the elastic limits are not reached, when each is stretched by the same tension, the ratio of energy stored in A to that in B is
[Kerala PMT 2004]
- (a) 2 : 3 (b) 3 : 4
(c) 3 : 2 (d) 6 : 1

Critical Thinking

Objective Questions

1. An Indian rubber cord L metre long and area of cross-section $A \text{ metre}^2$ is suspended vertically. Density of rubber is $D \text{ kg/metre}^3$ and Young's modulus of rubber is $E \text{ newton/metre}^2$. If the wire extends by 1 metre under its own weight, then extension l is
- (a) $L^2 Dg/E$ (b) $L^2 Dg/2E$
(c) $L^2 Dg/4E$ (d) L
2. To break a wire, a force of 10^6 N/m^2 is required. If the density of the material is $3 \times 10^3 \text{ kg/m}^3$, then the length of the wire which will break by its own weight will be
[Roorkee 1979; DPMT 2004]
- (a) 34 m (b) 30 m
(c) 300 m (d) 3 m
3. Two rods of different materials having coefficients of linear expansion α_1, α_2 and Young's moduli Y_1 and Y_2 respectively are fixed between two rigid massive walls. The rods are heated such that they undergo the same increase in temperature. There is no bending of rods. If $\alpha_1 : \alpha_2 = 2 : 3$, the thermal stresses developed in the two rods are equally provided $Y_1 : Y_2$ is equal to
[RPET 1999]
- (a) 2 : 3 (b) 1 : 1
(c) 3 : 2 (d) 4 : 9
4. The extension in a string obeying Hooke's law is x . The speed of sound in the stretched string is v . If the extension in the string is increased to $1.5x$, the speed of sound will be
[IIT 1996]
- (a) $1.22 v$ (b) $0.61 v$
(c) $1.50 v$ (d) $0.75 v$
5. One end of a uniform wire of length L and of weight W is attached rigidly to a point in the roof and a weight W_1 is suspended from its lower end. If S is the area of cross-section of the wire, the stress in the wire at a height $3L/4$ from its lower end is
[RPET 2001]
- (a) $\frac{W_1}{S}$ (b) $\frac{W_1 + (W/4)}{S}$
(c) $\frac{W_1 + (3W/4)}{S}$ (d) $\frac{W_1 + W}{S}$

6. There are two wires of same material and same length while the diameter of second wire is 2 times the diameter of first wire, then ratio of extension produced in the wires by applying same load will be

[DCE 2000; Roorkee 2000; DCE 2003]

- (a) 1 : 1 (b) 2 : 1
(c) 1 : 2 (d) 4 : 1
7. A particle of mass m is under the influence of a force F which varies with the displacement x according to the relation $F = -kx + F_0$ in which k and F_0 are constants. The particle when disturbed will oscillate

[UPSEAT 2001]


- (a) about $x = 0$, with $\omega \neq \sqrt{k/m}$
(b) about $x = 0$, with $\omega = \sqrt{k/m}$
(c) about $x = F_0/k$ with $\omega = \sqrt{k/m}$
(d) about $x = F_0/k$ with $\omega \neq \sqrt{k/m}$
8. An elastic material of Young's modulus Y is subjected to a stress S . The elastic energy stored per unit volume of the material is

MP PMT 1990, 96; IIT 1992; AIIMS 1997]


- (a) $\frac{2Y}{S^2}$ (b) $\frac{S^2}{2Y}$
(c) $\frac{S}{2Y}$ (d) $\frac{S^2}{Y}$

Graphical Questions

1. The graph shown was obtained from experimental measurements of the period of oscillations T for different masses M placed in the scale pan on the lower end of the spring balance. The most likely reason for the line not passing through the origin is that the [NCERT 1978]



- (a) Spring did not obey Hooke's Law
(b) Amplitude of the oscillations was too large
(c) Clock used needed regulating
(d) Mass of the pan was neglected
2. A graph is shown between stress and strain for a metal. The part in which Hooke's law holds good is




- (a) OA
(b) AB
(c) BC
(d) CD
3. In the above graph, point B indicates
- (a) Breaking point (b) Limiting point

- (c) Yield point (d) None of the above

4. In the above graph, point D indicates


- (a) Limiting point (b) Yield point
(c) Breaking point (d) None of the above

5. The strain-stress curves of three wires of different materials are shown in the figure. P , Q and R are the elastic limits of the wires. The figure shows that



- (a) Elasticity of wire P is maximum
(b) Elasticity of wire Q is maximum
(c) Tensile strength of R is maximum
(d) None of the above is true


6. The diagram shows a force-extension graph for a rubber band. Consider the following statements [AMU 2001]



- I. It will be easier to compress this rubber than expand it
II. Rubber does not return to its original length after it is stretched
III. The rubber band will get heated if it is stretched and released
- Which of these can be deduced from the graph

- (a) III only (b) II and III
(c) I and III (d) I only


7. The stress versus strain graphs for wires of two materials A and B are as shown in the figure. If Y_A and Y_B are the Young's moduli of the materials, then



[Kerala (Engg.) 2001]

- (a) $Y_B = 2Y_A$
(b) $Y_A = Y_B$
(c) $Y_B = 3Y_A$
(d) $Y_A = 3Y_B$


8. The load versus elongation graph for four wires of the same material is shown in the figure. The thickest wire is represented by the line [KCET 2001]




- (a) OD
(b) OC

(c) OB (d) OA


9. The adjacent graph shows the extension (Δl) of a wire of length 1 m suspended from the top of a roof at one end with a load W connected to the other end. If the cross sectional area of the wire is 10^{-6} m^2 , calculate the young's modulus of the material of the wire [IIT-JEE (Screening) 2003]

(a) $2 \times 10^{11}\text{ N/m}^2$ (b) $2 \times 10^{-11}\text{ N/m}^2$ (c) $3 \times 10^{-12}\text{ N/m}^2$ (d) $2 \times 10^{-13}\text{ N/m}^2$ 


10. The graph is drawn between the applied force F and the strain (x) for a thin uniform wire. The wire behaves as a liquid in the part [CPMT 1988]

(a) ab (b) bc (c) cd (d) oa 


11. The graph shows the behaviour of a length of wire in the region for which the substance obeys Hook's law. P and Q represent [AMU 2001]

(a) $P = \text{applied force, } Q = \text{extension}$ (b) $P = \text{extension, } Q = \text{applied force}$ (c) $P = \text{extension, } Q = \text{stored elastic energy}$ (d) $P = \text{stored elastic energy, } Q = \text{extension}$ 


12. The potential energy U between two molecules as a function of the distance X between them has been shown in the figure. The two molecules are [CPMT 1986, 88, 91]



- (a) Attracted when x lies between A and B and are repelled when x lies between B and C
- (b) Attracted when x lies between B and C and are repelled when x lies between A and B
- (c) Attracted when they reach B
- (d) Repelled when they reach B
13. The value of force constant between the applied elastic force F and displacement will be


(a) $\sqrt{3}$ (b) $\frac{1}{\sqrt{3}}$ (c) $\frac{1}{2}$ (d) $\frac{\sqrt{3}}{2}$ 

14. The diagram shows stress v/s strain curve for the materials A and B . From the curves we infer that [AIIMS 1987]

(a) A is brittle but B is ductile(b) A is ductile and B is brittle(c) Both A and B are ductile(d) Both A and B are brittle

15. Which one of the following is the Young's modulus (in N/m) for the wire having the stress-strain curve shown in the figure


(a)

(b) 8.0×10^{11} (c) 10×10^{11} (d) 2.0×10^{11} 

The diagram shows the change x in the length of a thin uniform wire caused by the application of stress F at two different temperatures T_1 and T_2 . The variations shown suggest that

(a) $T_1 > T_2$ (b) $T_1 < T_2$ (c) $T_1 = T_2$

(d) None of these




17. A student plots a graph from his reading on the determination of Young's modulus of a metal wire but forgets to label. The quantities on X and Y axes may be respectively.

(a) Weight hung and length increased


(b) Stress applied and length increased

(c) Stress applied and strain developed

(d) Length increased and weight hung



18. The points of maximum and minimum attraction in the curve between potential energy (U) and distance (r) of a diatomic molecules are respectively

(a) S and R (b) T and S (c) R and S (d) S and T 


19. The stress-strain curves for brass, steel and rubber are shown in the figure. The lines A , B and C are for

(a) Rubber, brass and steel respectively

(b) Brass, steel and rubber respectively

(c) Steel, brass and rubber respectively

(d) Steel, rubber and brass respectively



A R Assertion & Reason

For AIIMS Aspirants

Read the assertion and reason carefully to mark the correct option out of the options given below:

- (a) If both assertion and reason are true and the reason is the correct explanation of the assertion.
 (b) If both assertion and reason are true but reason is not the correct explanation of the assertion.
 (c) If assertion is true but reason is false.
 (d) If the assertion and reason both are false.
 (e) If assertion is false but reason is true.

1. Assertion : The stretching of a coil is determined by its shear modulus.
 Reason : Shear modulus change only shape of a body keeping its dimensions unchanged.
2. Assertion : Spring balances show correct readings even after they had been used for a long time interval.
 Reason : On using for long time, spring balances losses its elastic strength.
3. Assertion : Steel is more elastic than rubber.
 Reason : Under given deforming force, steel is deformed less than rubber.
4. Assertion : Glassy solids have sharp melting point.
 Reason : The bonds between the atoms of glassy solids get broken at the same temperature.
5. Assertion : A hollow shaft is found to be stronger than a solid shaft made of same material.
 Reason : The torque required to produce a given twist in hollow cylinder is greater than that required to twist a solid cylinder of same size and material.
6. Assertion : Bulk modulus of elasticity (K) represents incompressibility of the material.
 Reason : Bulk modulus of elasticity is proportional to change in pressure.
7. Assertion : Strain is a unitless quantity.
 Reason : Strain is equivalent to force.
8. Assertion : The bridges declared unsafe after a long use.
 Reason : Elastic strength of bridges losses with time.
9. Assertion : Two identical solid balls, one of ivory and the other of wet-clay are dropped from the same height on the floor. Both the balls will rise to same height after bouncing.
 Reason : Ivory and wet-clay have same elasticity.
10. Assertion : Young's modulus for a perfectly plastic body is zero.
 Reason : For a perfectly plastic body, restoring force is zero.
11. Assertion : Identical springs of steel and copper are equally stretched. More work will be done on the steel spring.
 Reason : Steel is more elastic than copper.
12. Assertion : Stress is the internal force per unit area of a body.
 Reason : Rubber is less elastic than steel.

Answers

Young's Modulus and Breaking Stress

1	c	2	b	3	d	4	c	5	b
6	c	7	c	8	c	9	b	10	c
11	d	12	a	13	b	14	d	15	a
16	c	17	a	18	a	19	d	20	c
21	b	22	b	23	b	24	d	25	b
26	d	27	c	28	b	29	b	30	b
31	b	32	c	33	d	34	b	35	a
36	b	37	a	38	b	39	d	40	a
41	c	42	d	43	c	44	a	45	b
46	d	47	a	48	c	49	d	50	c
51	c	52	a	53	c	54	a	55	b
56	a	57	a	58	d	59	a	60	a
61	c	62	b	63	d	64	b	65	a
66	c	67	d	68	b	69	a	70	d
71	b	72	d	73	c	74	c	75	a
76	a	77	d	78	d	79	a	80	a
81	d	82	d	83	a	84	d	85	a
86	c	87	c	88	b	89	b	90	c
91	c	92	c	93	b	94	c	95	c
96	b	97	d	98	b	99	a	100	b
101	b	102	a	103	b	104	d	105	b
106	a	107	d	108	d	109	c	110	d
111	c	112	c	113	c	114	d	115	d
116	b	117	d	118	a	119	c	120	a
121	a	122	a	123	b	124	b	125	b

Bulk Modulus

1	c	2	c	3	b	4	d	5	b
6	d	7	a	8	d	9	c	10	c
11	b	12	c	13	d	14	a	15	c
16	b	17	c	18	c	19	a	20	d
21	b								

Rigidity Modulus

1	b	2	d	3	c	4	d	5	c
6	a	7	a	8	b	9	c	10	d
11	d	12	b	13	d	14	b	15	c
16	b	17	d	18	c				

Work Done in Stretching a Wire

1	d	2	b	3	c	4	a	5	b
6	c	7	d	8	c	9	b	10	b
11	c	12	a	13	d	14	a	15	a
16	a	17	b	18	a	19	c	20	d
21	b	22	c	23	c	24	c	25	b
26	a	27	b	28	a	29	a	30	b

Critical Thinking Questions

1	b	2	a	3	c	4	a	5	c
6	d	7	c	8	b				

Graphical Questions

1	d	2	a	3	c	4	c	5	d
6	a	7	d	8	a	9	a	10	b
11	c	12	b	13	b	14	b	15	d
16	a	17	c	18	d	19	c		

Assertion and Reason

1	a	2	e	3	a	4	d	5	a
6	a	7	c	8	a	9	d	10	a
11	a	12	b						

AS Answers and Solutions


Young's Modulus and Breaking Stress

- (c) $l = \frac{FL}{YA} \Rightarrow l \propto \frac{1}{A}$
- (b) Stress \propto Strain \Rightarrow Stress $\propto \frac{l}{L}$
- (d) $Y = \frac{F}{A} \frac{L}{A} \Rightarrow l \propto \frac{L}{A} \propto \frac{L}{\pi d^2}$
 $\therefore l \propto \frac{L}{d^2}$ [As F and Y are constant]
 The ratio of $\frac{L}{d^2}$ is maximum for case (d)
- (c) $l = \frac{FL}{AY} \Rightarrow l \propto \frac{L}{d^2} \Rightarrow \frac{l_1}{l_2} = \frac{L_1}{L_2} \times \left(\frac{d_2}{d_1}\right)^2 = \frac{1}{2} \times \left(\frac{1}{2}\right)^2 = \frac{1}{8}$
- (b) Young's modulus of wire does not vary with dimension of wire. It is the property of given material.

6. (c) Depression in beam

$$\delta = \frac{WL^3}{4Ybd^3}$$

$$\therefore \delta \propto \frac{1}{Y}$$



7. (c)
- $l = \frac{FL}{AY} \Rightarrow l \propto \frac{1}{r^2}$
- (
- F, L
- and
- Y
- are constant)

$$\frac{l_2}{l_1} = \left(\frac{r_1}{r_2}\right)^2 = (2)^2 = 4 \Rightarrow l_2 = 4l_1 = 4 \text{ cm}$$

8. (c)

9. (b)
- $l \propto \frac{1}{r^2}$
- . If radius of the wire is doubled then increment in

length will become $\frac{1}{4}$ times i.e. $\frac{12}{4} = 3 \text{ mm}$

10. (c)
- $l = \frac{mgL}{AY} = \frac{1 \times 10 \times 1.1}{1.1 \times 10^{11} \times 10^{-6}} \text{ m} = 0.1 \text{ mm}$

11. (d)
- $F = \frac{YAl}{L} = \frac{2.2 \times 10^{11} \times 2 \times 10^{-6} \times 5 \times 10^{-4}}{2} = 1.1 \times 10^2 \text{ N}$

12. (a) Interatomic force constant
- $K = Y \times r_0$

$$= 2 \times 10^{11} \times 3 \times 10^{-10} = 60 \text{ N/m}$$

13. (b) To double the length of wire, Stress = Young's modulus

$$\therefore \frac{F}{A} = 2 \times 10^{12} \frac{\text{dyne}}{\text{cm}^2}.$$

If $A = 1$ then $F = 2 \times 10^{12} \text{ dyne}$

14. (d)

15. (a) Because due to increase in temperature intermolecular forces decreases.

16. (c) Breaking Force
- \propto
- Area of cross section of wire (
- πr
-)
-
- If radius of wire is double then breaking force will become four times.

17. (a)
- $Y = 3K(1 - 2\sigma)$
- and
- $Y = 2\eta(1 + \sigma)$

$$\text{Eliminating } \sigma \text{ we get } Y = \frac{9\eta K}{\eta + 3K}$$

18. (a)
- $F = \frac{YAl}{L} = \frac{9 \times 10^{10} \times \pi \times 4 \times 10^{-6} \times 0.1}{100} = 360 \pi \text{ N}$

19. (d) Energy stored per unit volume
- $= \frac{1}{2} \times \text{Stress} \times \text{Strain}$

$$= \frac{1}{2} \times \text{Young's modulus} \times (\text{Strain})^2 = \frac{1}{2} \times Y \times x^2$$

20. (c)
- $l \propto L$
- i.e. if length is reduced to half then increase in length will be
- $\frac{l}{2}$
- .

21. (b)
- $l = \frac{L^2 dg}{2Y} = \frac{(8 \times 10^{-2})^2 \times 1.5 \times 9.8}{2 \times 5 \times 10^8} = 9.6 \times 10^{-11} \text{ m}$

22. (b) Stress
- $= \frac{\text{force}}{\text{Area}} \therefore \text{Stress} \propto \frac{1}{\pi^2}$

$$\frac{S_B}{S_A} = \left(\frac{r_A}{r_B}\right)^2 = (2)^2 \Rightarrow S_B = 4S_A$$

23. (b) Breaking force
- \propto
- Area of cross section of wire

i.e. load hold by the wire does not depend upon the length of the wire.

24. (d) If length of wire doubled then strain = 1

$$Y = \text{stress} \Rightarrow F = Y \times A = 10^{12} \times 0.5 = 0.5 \times 10^{12} \text{ dyne}$$

25. (b) Due to elastic fatigue its elastic property decreases.

26. (d)
- $l = \frac{FL}{AY} \Rightarrow l \propto \frac{1}{r^2}$
- (
- F, L
- and
- Y
- are same)

$$\frac{l_A}{l_B} = \left(\frac{r_B}{r_A}\right)^2 = \left(\frac{r_B}{2r_B}\right)^2 = \frac{1}{4} \Rightarrow l_A = 4l_B \text{ or } l_B = \frac{l_A}{4}$$

27. (c)

28. (b)
- $l = \frac{FL}{AY} \Rightarrow \frac{l_s}{l_{cu}} = \frac{Y_{cu}}{Y_s}$
- (
- F, L
- and
- Y
- are constant)

$$\therefore \frac{l_s}{l_{cu}} = \frac{1.2 \times 10^{11}}{2 \times 10^{11}} = \frac{3}{5}$$

29. (b) If length of the wire is doubled then strain = 1

$$\therefore Y = \frac{\text{Stress}}{\text{Strain}} = \frac{\text{Force}}{\text{Area}} = \frac{2 \times 10^5}{2} = 10^5 \frac{\text{dyne}}{\text{cm}^2}$$

30. (b)
- $l = \frac{FL}{AY} \Rightarrow l \propto \frac{L}{r^2}$
- (
- F
- and
- Y
- are same)

$$\therefore \frac{l_2}{l_1} = \frac{L_2}{L_1} \left(\frac{r_1}{r_2}\right)^2 = 2 \times \left(\frac{1}{2}\right)^2 = \frac{1}{2} \Rightarrow l_2 = \frac{l_1}{2} = \frac{l}{2} = 0.5 \text{ mm}.$$

31. (b)
- $F = \text{force developed} = YA \alpha(\Delta\theta)$

$$= 10^{11} \times 10^{-4} \times 10^{-5} \times 100 = 10^4 \text{ N}$$

32. (c)
- $F = YA \alpha \Delta\theta \therefore F \propto A$

33. (d)
- $Y = \frac{F/A}{\text{strain}} \Rightarrow A = \frac{F}{Y \times \text{strain}} = \frac{10^4}{7 \times 10^9 \times 0.002}$
-
- $= \frac{1}{14} \times 10^{-2} = 7.1 \times 10^{-4} \text{ m}^2$

34. (b) strain
- \propto
- stress
- $\propto \frac{F}{A}$

$$\text{Ratio of strain} = \frac{A_2}{A_1} = \left(\frac{r_2}{r_1}\right)^2 = \left(\frac{4}{1}\right)^2 = \frac{16}{1}$$

35. (a)
- $F = 2000 \text{ N}, L = 6 \text{ m}, l = 0.5 \text{ cm}, A = 10^{-6} \text{ m}^2$

$$Y = \frac{FL}{Al} = \frac{2000 \times 6}{10^{-6} \times 0.5 \times 10^{-2}} = 2.35 \times 10^{12} \text{ N/m}^2$$

36. (b)
- $F = Kx \Rightarrow K = \frac{F}{x} = \frac{9 \times 9.8}{4.5 \times 10^{-3}} = 1.96 \times 10^4 \text{ N/m}$

37. (a)
- $l \propto \frac{FL}{r^2 Y} \Rightarrow l \propto \frac{1}{r^2}$
- (
- F, L
- and
- Y
- are constant)

$$\frac{l_2}{l_1} = \left(\frac{r_1}{r_2}\right)^2 = (n)^2 \Rightarrow l_2 = n^2 l_1$$

38. (b) Longitudinal strain
- $\frac{l}{L} = \frac{\text{stress}}{Y} = \frac{10^6}{10^{11}} = 10^{-5}$

$$\text{Percentage increase in length} = 10^{-5} \times 100 = 0.001\%$$

39. (d) It is the specific property of a particular metal at a given temperature which can be changed only by temperature variations.

40. (a) $Y = \frac{3.6 \times 10^{-9} \text{ N}/\text{\AA}}{3 \times 10^{-10} \text{ m}} = 1.2 \times 10^{11} \text{ N/m}^2$

41. (c)

42. (d) $K = \frac{YA}{L} = \frac{Y \times \pi r^2}{L} \Rightarrow K \propto \frac{Yr^2}{L}$

i.e. force constant of a wire depends on young's modulus (nature of the material), radius of the wire and length of the wire.

43. (c)

44. (a)

45. (b)

46. (d) Increase in tension of wire = $YA \alpha \Delta \theta$

$$= 8 \times 10^{-6} \times 2.2 \times 10^{11} \times 10^{-2} \times 10^{-4} \times 5 = 8.8 \text{ N}$$

47. (a) A small change in pressure produces a large change in volume.

48. (c) $W = \frac{1}{2} \frac{YAL^2}{L} \Rightarrow 0.4 = \frac{1}{2} \times \frac{Y \times 1^{-6} \times (0.2 \times 10^{-2})^2}{1}$

$$\therefore Y = 2 \times 10^{11} \text{ N/m}^2$$

49. (d)

50. (c) $Y = 3K(1 - 2\sigma)$

$$\sigma = \frac{3K - Y}{6K} = \frac{3 \times 11 \times 10^{10} - 7.25 \times 10^{10}}{6 \times 11 \times 10^{10}} \Rightarrow \sigma = 0.39$$

51. (c)

52. (a) If density of the material increases then more force (stress) is required for same deformation i.e. the value of young's modulus increases.

53. (c) $Y = 10^4 \text{ N/m}^2, A = 2 \times 10^{-4} \text{ m}^2, F = 2 \times 10^5 \text{ dyne} = 2 \text{ N}$

$$l = \frac{FL}{AY} = \frac{2 \times L}{2 \times 10^{-4} \times 10^4} = L$$

$$\therefore \text{Final length} = \text{initial length} + \text{increment} = 2L$$

54. (a)

55. (b) Y is defined for solid only and for powders, $Y = 0$

56. (a)

57. (a) $l = \frac{FL}{AY} = \frac{FL}{\pi^2 Y} \therefore l \propto \frac{FL}{r^2} \quad (Y = \text{constant})$

$$\therefore \frac{l_2}{l_1} = \frac{F_2}{F_1} \times \frac{L_2}{L_1} \left(\frac{r_1}{r_2} \right)^2 = 2 \times 2 \times \left(\frac{1}{2} \right)^2 = 1$$

$$\therefore l_2 = l_1 \text{ i.e. increment in its length will be } l$$

58. (d) Breaking stress = strain \times Young's modulus

$$= 0.15 \times 2 \times 10^{11} = 3 \times 10^{10} \text{ Nm}^{-2}$$

59. (a) In accordance with Hooke's law.

60. (a) $F = A \times Y \times \text{strain} = 1 \times 10^{-4} \times 2 \times 10^{11} \times 0.1 = 2 \times 10^6 \text{ N}$

61. (c)

62. (b) Because strain is a dimensionless and unitless quantity.

63. (d) Stress = $\frac{\text{Force}}{\text{area}}$.

In the present case, force applied and area of cross-section of wires are same, therefore stress has to be the same.

$$\text{Strain} = \frac{\text{Stress}}{Y}$$

Since the Young's modulus of steel wire is greater than the copper wire, therefore, strain in case of steel wire is less than that in case of copper wire.

64. (b) Initial length (circumference) of the ring = $2\pi r$

Final length (circumference) of the ring = $2\pi R$

Change in length = $2\pi R - 2\pi r$.

$$\text{strain} = \frac{\text{change in length}}{\text{original length}} = \frac{2\pi(R-r)}{2\pi r} = \frac{R-r}{r}$$

$$\text{Now Young's modulus } E = \frac{F/A}{l/L} = \frac{F/A}{(R-r)r}$$

$$\therefore F = AE \left(\frac{R-r}{r} \right)$$

65. (a) $l = \frac{FL}{\pi^2 r} \Rightarrow l \propto \frac{F}{r^2} \quad (Y \text{ and } L \text{ are constant})$

$$\frac{l_2}{l_1} = \frac{F_2}{F_1} \times \left(\frac{r_1}{r_2} \right)^2 = 2 \times (2)^2 = 8 \therefore l_2 = 8l_1 = 8 \times 1 = 8 \text{ mm}$$

66. (c) $l = \frac{FL}{\pi^2 Y} \Rightarrow l \propto \frac{L}{r^2} \quad (F \text{ and } Y \text{ are constant})$

$$\frac{l_1}{l_2} = \frac{L_1}{L_2} \left(\frac{r_2}{r_1} \right)^2 = \frac{1}{2} (\sqrt{2})^2 \therefore \frac{l_1}{l_2} = 1 : 1$$

67. (d) $l \propto \frac{1}{r^2} \quad (F, L \text{ and } Y \text{ are constant})$

$$\frac{l_2}{l_1} = \left(\frac{r_1}{r_2} \right)^2 = \left(\frac{1}{2} \right)^2 \Rightarrow l_2 = \frac{l_1}{4} = \frac{2.4}{4} \Rightarrow l_2 = 0.6 \text{ cm}$$

68. (b) $F = Y \times A \times \frac{l}{L} \Rightarrow F \propto r^2 \quad (Y, l \text{ and } L \text{ are constant})$

If diameter is made four times then force required will be 16 times. i.e. $16 \times 10^5 \text{ N}$

69. (a) $F = Y \times A \times \frac{l}{L} \Rightarrow F \propto \frac{r^2}{L} \quad (Y \text{ and } l \text{ are constant})$

$$\therefore \frac{F_1}{F_2} = \left(\frac{r_1}{r_2} \right)^2 \left(\frac{L_2}{L_1} \right) = \left(\frac{2}{1} \right)^2 \left(\frac{1}{4} \right) = 1 \Rightarrow \frac{F_1}{F_2} = 1 : 1$$

70. (d) Increment in length $l = \frac{L^2 dg}{2Y} \therefore l \propto L^2 d$

71. (b) Adiabatic elasticity $E = \gamma P$

For argon $E_{Ar} = 1.6 P$ (i)

For hydrogen $E_{H_2} = 1.4 P'$ (ii)

As elasticity of hydrogen and argon are equal

$$\therefore 1.6P = 1.4P' \Rightarrow P' = \frac{8}{7} P$$

72. (d)

73. (c) $l = \frac{FL}{AY} = \frac{FL^2}{(AL)Y} = \frac{FL^2}{VY}$.

If volume is fixed then $l \propto L^2$

74. (c) $F = YA \alpha \Delta t = 2 \times 10^{11} \times 3 \times 10^{-6} \times 10^{-5} \times (20-10) = 60 \text{ N}$

75. (a) Because dimension of invar does not varies with temperature.

76. (a) $l = \frac{FL}{\pi^2 Y} \therefore l \propto \frac{L}{r^2} \quad (Y \text{ and } F \text{ are constant})$

$$\frac{l_2}{l_1} = \frac{L_2}{L_1} \times \left(\frac{r_1}{r_2}\right)^2 = (2) \times \left(\frac{1}{2}\right)^2 = \frac{1}{2}$$

$$\Rightarrow l_2 = \frac{l_1}{2} = \frac{0.01m}{2} = 0.005m$$

77. (d) Poisson's ratio varies between -1 and 0.5

78. (d) $L_2 = l_2(1 + \alpha_2 \Delta\theta)$ and $L_1 = l_1(1 + \alpha_1 \Delta\theta)$
 $\Rightarrow (L_2 - L_1) = (l_2 - l_1) + \Delta\theta(l_2 \alpha_2 - l_1 \alpha_1)$

Now $(L_2 - L_1) = (l_2 - l_1)$ so, $l_2 \alpha_2 - l_1 \alpha_1 = 0$

79. (a) Thermal stress $= Y \alpha \Delta\theta$

$$= 1.2 \times 10^{11} \times 1.1 \times 10^{-5} \times (20 - 10) = 1.32 \times 10^7 \text{ N/m}^2$$

80. (a) $l = \frac{FL}{AY} \Rightarrow l \propto \frac{1}{r^2}$ (FL and Y are constant)

$$\frac{l_2}{l_1} = \left(\frac{r_1}{r_2}\right)^2 = (2)^2 \Rightarrow l_2 = 4l_1 = 4 \times 3 = 12mm$$

81. (d) $l = \frac{L^2 dg}{2Y} = \frac{(8)^2 \times 1.5 \times 10^3 \times 10}{2 \times 5 \times 10^6} = 9.6 \times 10^{-2} m$

82. (d) $l \propto \frac{L}{r^2}$ (Y and F are constant)

Maximum extension takes place in that wire for which the ratio of $\frac{L}{r^2}$ will be maximum.

83. (a)

84. (d)

85. (a) $Y = \frac{MgL}{Al} = \frac{250 \times 9.8 \times 2}{50 \times 10^{-6} \times 0.5 \times 10^{-3}}$
 $= 19.6 \times 10^{10} \text{ N/m}^2$

86. (c)

87. (c) $l = \frac{FL}{AY} \Rightarrow l \propto \frac{L}{r^2}$ (F and Y are constant)

$$\frac{l_2}{l_1} = \frac{L_2}{L_1} \times \left(\frac{r_1}{r_2}\right)^2 = 2 \times \left(\frac{1}{2}\right)^2 = \frac{1}{2} \therefore l_2 = \frac{l_1}{2}$$

i.e. the change in the length of other wire is $\frac{l}{2}$

88. (b)

89. (b)

90. (c) $l = \frac{MgL}{YA} = \frac{1 \times 10 \times 1}{2 \times 10^{11} \times 10^{-6}} = 0.05 \text{ mm}$

91. (c) $l = \frac{FL}{AY} \therefore l \propto \frac{F}{r^2}$

$$\frac{l_1}{l_2} = \frac{F_2}{F_1} \left(\frac{r_1}{r_2}\right)^2 = (4) \times \left(\frac{1}{2}\right)^2 = 1 \therefore l_2 = l_1 = 1mm$$

92. (c)

93. (b) $l = \frac{FL}{AY} \therefore l \propto \frac{1}{A}$ (FL and Y are constant)

$$\frac{A_2}{A_1} = \frac{l_1}{l_2} \Rightarrow A_2 = A_1 \left(\frac{0.1}{0.05}\right) = 2A_1 = 2 \times 4 = 8mm^2$$

94. (c) $l = \frac{FL}{\pi r^2 Y} \Rightarrow r^2 \propto \frac{1}{Y}$ (FL and l are constant)

$$\frac{r_2}{r_1} = \left(\frac{Y_1}{Y_2}\right)^{1/2} = \left(\frac{7 \times 10^{10}}{12 \times 10^{10}}\right)^{1/2}$$

$$\Rightarrow r_2 = 1.5 \times \left(\frac{7}{12}\right)^{1/2} = 1.145 \text{ mm} \therefore \text{dia} = 2.29 \text{ mm}$$

95. (c) $F = \frac{YAl}{L} = 0.9 \times 10^{11} \times \pi \times (0.3 \times 10^{-3})^2 \times \frac{0.2}{100} = 51 \text{ N}$

96. (b) Young's modulus $= \frac{\text{stress}}{\text{strain}}$

As the length of wire get doubled therefore strain $= 1$

$$\therefore Y = \text{strain} = 20 \times 10^9 \text{ N/m}$$

97. (d) $l = \frac{FL}{\pi r^2 Y} \therefore l \propto \frac{1}{r^2}$ (FL and Y are constant)

$$\frac{l_2}{l_1} = \left(\frac{r_1}{r_2}\right)^2 = (2)^2 \Rightarrow l_2 = 4l_1 = 4 \times 2 = 8 \text{ mm}.$$

98. (b) Let L is the original length of the wire and K is force constant of wire.

Final length = initial length + elongation

$$L' = L + \frac{F}{K}$$

$$\text{For first condition } a = L + \frac{4}{K} \quad \dots(i)$$

$$\text{For second condition } b = L + \frac{5}{K} \quad \dots(ii)$$

By solving (i) and (ii) equation we get

$$L = 5a - 4b \text{ and } K = \frac{1}{b - a}$$

Now when the longitudinal tension is $9N$, length of the string =

$$L + \frac{9}{K} = 5a - 4b + 9(b - a) = 5b - 4a.$$

99. (a)

100. (b)

101. (b) $K = Yr_0 = 20 \times 10^{10} \times 3 \times 10^{-10} = 60 \text{ N/m}$
 $= 6 \times 10^{-9} \text{ N/\AA}$

102. (a) $l = \frac{FL}{AY} = \frac{4.8 \times 10^3 \times 4}{1.2 \times 10^{-4} \times 1.2 \times 10^{11}} = 1.33 \text{ mm}$

103. (b)

104. (d) $Y = \frac{\text{Stress}}{\text{Strain}} = \text{Constant}$

It depends only on nature of material.

105. (b) $2\pi\sqrt{\frac{m}{k}} = 0.6 \quad \dots(i)$ and $2\pi\sqrt{\frac{m+m'}{k}} = 0.7 \quad \dots(ii)$

$$\text{Dividing (ii) by (i) we get } \left(\frac{7}{6}\right)^2 = \frac{m+m'}{m} = \frac{49}{36}$$

$$\frac{m+m'}{m} - 1 = \frac{49}{36} - 1 \Rightarrow \frac{m'}{m} = \frac{13}{36} \Rightarrow m' = \frac{13m}{36}$$

$$\text{Also } \frac{k}{m} = \frac{4\pi^2}{(0.6)^2}$$

$$\text{Desired extension} = \frac{m'g}{k} = \frac{13}{36} \times \frac{mg}{k}$$

$$= \frac{13}{36} \times 10 \times \frac{0.36}{4\pi^2} \approx 3.5 \text{ cm}$$

106. (a) $Y = \frac{F/A}{\text{Strain}} \Rightarrow \text{strain} = \frac{F}{AY}$

107. (d) $Y = \frac{k}{r_0} = \frac{7}{3 \times 10^{-10}} = 2.33 \times 10^{10} \text{ N/m}^2$

108. (d) $F = Y \times A \times \frac{l}{L} \Rightarrow F \propto \frac{r^2}{L}$ (Y and l are constant)

$$\frac{F_A}{F_B} = \left(\frac{r_A}{r_B}\right)^2 \times \left(\frac{L_B}{L_A}\right) = \left(\frac{2}{1}\right)^2 \times \left(\frac{2}{1}\right) = \frac{8}{1}$$

109. (c)

110. (d) When the length of wire is doubled then $l = L$ and strain = 1

$$\therefore Y = \text{strain} = \frac{F}{A}$$

$$\therefore \text{Force} = Y \times A = 2 \times 10^{11} \times 0.1 \times 10^{-4} = 2 \times 10^6 \text{ N}$$

111. (c) Potential energy stored in the rubber cord catapult will be converted into kinetic energy of mass.

$$\frac{1}{2}mv^2 = \frac{1}{2} \frac{YAl^2}{L} \Rightarrow v = \sqrt{\frac{YAl^2}{mL}}$$

$$= \sqrt{\frac{5 \times 10^8 \times 25 \times 10^{-6} \times (5 \times 10^{-2})^2}{5 \times 10^{-3} \times 10 \times 10^{-2}}} = 250 \text{ m/s}$$

112. (c)

113. (c)

114. (d)

115. (d) Breaking force $\propto r$

If diameter becomes double then breaking force will become four times i.e. $1000 \times 4 = 4000 \text{ N}$

116. (b)

117. (d) $l = \frac{FL}{AY} = \frac{FL^2}{(AL)Y} = \frac{FL^2}{VY}$

$$\therefore l \propto L^2 \text{ If volume of the wire remains constant}$$

$$\frac{l_2}{l_1} = \left(\frac{L_2}{L_1}\right)^2 = \left(\frac{8}{2}\right)^2 = 16$$

$$\therefore l_2 = 16 \times l_1 = 16 \times 2 = 32 \text{ mm} = 3.2 \text{ cm}$$

118. (a) $l = \frac{FL}{AY} \therefore l \propto \frac{1}{A}$ (FL and Y are constant)

$$\frac{l_2}{l_1} = \frac{A_1}{A_2} = \frac{4}{8} = \frac{1}{2} \Rightarrow l_2 = \frac{l_1}{2} = \frac{0.1}{2} = 0.05 \text{ mm}$$

119. (c) $L = \frac{p}{dg} = \frac{10^6}{3 \times 10^3 \times 10} = \frac{100}{3} = 33.3 \text{ m}$

120. (a) $l = \frac{L^2 dg}{2Y} = \frac{(10)^2 \times 1500 \times 10}{2 \times 5 \times 10^8} = 15 \times 10^{-4} \text{ m}$

121. (a) $Y = 3K(1 - 2\sigma)$, $Y = 2\eta(1 + \sigma)$

For $Y = 0$, we get $1 - 2\sigma = 0$, also $1 + \sigma = 0$

$$\Rightarrow \sigma \text{ lies between } \frac{1}{2} \text{ and } -1.$$

122. (a) Value of Poisson's ratio lie in range of -1 to $\frac{1}{2}$

123. (b) We know that $\frac{dV}{V} = (1 + 2\sigma) \frac{dL}{L}$

If $\sigma = -\frac{1}{2}$ then $\frac{dV}{V} = 0$

i.e. there is no change in volume.

124. (b) $\frac{dV}{V} = (1 + 2\sigma) \frac{dL}{L}$

$$\frac{dV}{V} = 2 \times 2 \times 10^{-3} = 4 \times 10^{-3} \left[\because \sigma = 0.5 = \frac{1}{2} \right]$$

$$\therefore \text{Percentage change in volume} = 4 \times 10^{-1} = 0.4\%$$

125. (b) $l = \frac{FL}{\pi r^2 Y} \therefore l \propto \frac{L}{r^2}$

Ratio of $\frac{L}{r^2}$ is maximum for wire in option (b).

Bulk Modulus

1. (c) Isothermal elasticity $K_i = P$

2. (c) Adiabatic elasticity $K_a = \gamma P$

3. (b) Ratio of adiabatic and isothermal elasticities

$$\frac{E\phi}{E\theta} = \frac{\gamma P}{P} = \gamma = \frac{C_p}{C_v}$$

4. (d)

5. (b) For triatomic gas $\gamma = \frac{4}{3}$

6. (d) From the ideal gas equation $\frac{P_1 V_1}{T_1} = \frac{P_2 V_2}{T_2}$

$$\frac{E_2}{E_1} = \frac{P_2}{P_1} = \frac{V_1}{V_2} \times \frac{T_2}{T_1} = \left(\frac{1}{4}\right) \times \left(\frac{400}{300}\right) = \frac{1}{3} \Rightarrow E_2 = \frac{E_1}{3}$$

i.e. elasticity will become $\frac{1}{3}$ times.

7. (a) $C = \frac{1}{K} = \frac{\Delta V/V}{\Delta P} \Rightarrow \Delta V = C \times \Delta P \times V$

$$= 4 \times 10^{-5} \times 100 \times 100 = 0.4 \text{ cc}$$

8. (d) $K = \frac{\Delta P}{\Delta V/V} = \frac{h\rho g}{\Delta V/V} = \frac{200 \times 10^3 \times 10}{0.1/100} = 2 \times 10^9$

9. (c) $\frac{1}{K} = \text{compressibility} = \left(\frac{-\Delta V/V}{\Delta P}\right)$

10. (c) $K = \frac{100}{0.01/100} = 10^6 \text{ atm} = 10^{11} \text{ N/m}^2 = 10^{12} \text{ dyne/cm}^2$

11. (b)

12. (c)

13. (d) If side of the cube is L then $V = L^3 \Rightarrow \frac{dV}{V} = 3 \frac{dL}{L}$

$$\therefore \% \text{ change in volume} = 3 \times (\% \text{ change in length})$$

$$= 3 \times 1\% = 3\% \therefore \text{Bulk strain } \frac{\Delta V}{V} = 0.03$$

14. (a) $B = \frac{\Delta p}{\Delta V/V} = \frac{h\rho g}{0.1/100} = \frac{200 \times 10^3 \times 9.8}{1/1000}$

$$= 19.6 \times 10^8 \text{ N/m}^2$$

15. (c) Isothermal elasticity $K_i = P = 1 \text{ atm} = 1.013 \times 10^5 \text{ N/m}^2$

16. (b)

17. (c) Isothermal bulk modulus = Pressure of gas

18. (c)

19. (a) If coefficient of volume expansion is α and rise in temperature is $\Delta\theta$ then $\Delta V = V\alpha\Delta\theta \Rightarrow \frac{\Delta V}{V} = \alpha\Delta\theta$


$$\text{Volume elasticity } \beta = \frac{P}{\Delta V/V} = \frac{P}{\alpha\Delta\theta} \Rightarrow \Delta\theta = \frac{P}{\alpha\beta}$$

20. (d) $K = \frac{\Delta p}{\Delta V/V} = \frac{(1.165 - 1.01) \times 10^5}{10/100} = \frac{0.155 \times 10^5}{1/10}$
 $= 1.55 \times 10^5 \text{ pa}$

21. (b) $B = \frac{\Delta p}{\Delta V/V} \Rightarrow \frac{1}{B} \propto \frac{\Delta V}{V} \quad [\Delta p = \text{constant}]$

Rigidity Modulus

1. (b)
 2. (d) Modulus of rigidity is the property of material.
 3. (c) $Y = 2\eta(1 + \sigma)$
 4. (d) $Y = 2\eta(1 + \sigma) \Rightarrow \sigma = \frac{0.5Y - \eta}{\eta}$
 5. (c) Twisting couple $C = \frac{\pi\eta r^4 \theta}{2l}$
 If material and length of the wires A and B are equal and equal twisting couple are applied then
 $\theta \propto \frac{1}{r^4} \therefore \frac{\theta_1}{\theta_2} = \left(\frac{r_2}{r_1}\right)^4$
 6. (a) A small part of the spring bear tangential stress, causing straining strain.
 7. (a) $Y = 2\eta(1 + \sigma)$
 For no transverse strain ($\sigma = 0$)
 $Y = 2\eta \Rightarrow \eta = \frac{Y}{2} = 3 \times 10^{12} \text{ N/m}^2$
 8. (b) $Y = 2\eta(1 + \sigma) \Rightarrow 3\eta = 2\eta(1 + \sigma) \Rightarrow \sigma = \frac{3}{2} - 1 = \frac{1}{2}$
 Now substituting the value of σ in the following expression.
 $Y = 3K(1 - 2\sigma) \Rightarrow K = \frac{Y}{3(1 - 2\sigma)} = \infty$
 9. (c)
 10. (d) $Y = 2\eta(1 + \sigma)$
 $2.4\eta = 2\eta(1 + \sigma) \Rightarrow 1.2 = 1 + \sigma \Rightarrow \sigma = 0.2$
 11. (d) Shearing strain $\phi = \frac{x}{L} = \frac{0.02 \text{ cm}}{10 \text{ cm}} \therefore \phi = 0.002$
 12. (b)
 13. (d) There will be both shear stress and normal stress.
 14. (b) Angle of shear $\phi = \frac{r\theta}{L} = \frac{4 \times 10^{-1}}{100} \times 30^\circ = 0.12^\circ$
 15. (c) For twisting, Angle of shear $\phi \propto \frac{1}{L}$
 i.e. if L is more then ϕ will be small.
 16. (b) $r\theta = L\phi \Rightarrow 10^{-2} \times 0.8 = 2 \times \phi \Rightarrow \phi = 0.004$
 17. (d) $\tau = C.\theta = \frac{\pi\eta r^4 \theta}{2L} = \text{Constant}$



$$\Rightarrow \frac{\pi\eta r^4(\theta - \theta_0)}{2l} = \frac{\pi\eta(r/2)^4(\theta_0 - \theta')}{2(l/2)}$$

$$\Rightarrow \frac{(\theta - \theta_0)}{2} = \frac{\theta_0}{16} \Rightarrow \theta_0 = \frac{8}{9}\theta$$

18. (c)

Work Done in Stretching a Wire

1. (d) $U = \frac{1}{2} \left(\frac{YA}{L} \right) l^2 \therefore U \propto l^2$
 $\frac{U_2}{U_1} = \left(\frac{l_2}{l_1} \right)^2 = \left(\frac{10}{2} \right)^2 = 25 \Rightarrow U_2 = 25U_1$
 i.e. potential energy of the spring will be 25 J
 2. (b)
 3. (c) Work done $= \frac{1}{2} Fl = \frac{Mgl}{2}$
 4. (a) $W = \frac{1}{2} Fl \therefore W \propto l$ (F is constant)
 $\therefore \frac{W_1}{W_2} = \frac{l_1}{l_2} = \frac{l}{2l} = \frac{1}{2}$
 5. (b) $W = \frac{1}{2} \times F \times l = \frac{1}{2} mgl$
 $= \frac{1}{2} \times 10 \times 10 \times 1 \times 10^{-1} = 0.05 \text{ J}$
 6. (c) $K = \frac{F}{l}$ and $W = \frac{1}{2} Fl = \frac{1}{2} Kl \times l = \frac{1}{2} Kl^2$
 7. (d) Due to tension, intermolecular distance between atoms is increased and therefore potential energy of the wire is increased and with the removal of force interatomic distance is reduced and so is the potential energy. This change in potential energy appears as heat in the wire and thereby increases the temperature.
 8. (c) Due to increase in intermolecular distance.
 9. (b)
 10. (b) $U = \frac{1}{2} \times \frac{(\text{stress})^2}{Y} \times \text{volume} = \frac{1}{2} \times \frac{F^2 \times A \times L}{A^2 \times Y}$
 $= \frac{1}{2} \times \frac{F^2 L}{AY} = \frac{1}{2} \times \frac{(50)^2 \times 0.2}{1 \times 10^{-4} \times 1 \times 10^{11}} = 2.5 \times 10^{-5} \text{ J}$
 11. (c) Work done in stretching a wire
 $W = \frac{1}{2} Fl = \frac{1}{2} \times 10 \times 0.5 \times 10^{-3} = 2.5 \times 10^{-3} \text{ J}$
 Work done to displace it through 1.5 mm
 $W = F \times l = 5 \times 10^{-3} \text{ J}$
 The ratio of above two work = 1 : 2
 12. (a) Increase in energy $= \frac{1}{2} \times 20 \times 1 \times 10^{-3} = 0.01 \text{ J}$
 13. (d) Ratio of work done $= \frac{1/2 Fl}{Fl} = \frac{1}{2}$
 14. (a) Energy per unit volume $= \frac{1}{2} \times Y \times (\text{strain})^2$
 $\therefore \text{strain} = \sqrt{\frac{2E}{Y}}$
 15. (a) Energy per unit volume $= \frac{(\text{stress})^2}{2Y}$

$$\frac{E_1}{E_2} = \frac{Y_2}{Y_1} \text{ (Stress is constant)} \therefore \frac{E_1}{E_2} = \frac{3}{2}$$

$$\begin{aligned} 16. \quad (a) \quad \text{Energy} &= \frac{1}{2} Fl = \frac{1}{2} \times F \times \left(\frac{FL}{AY} \right) = \frac{1}{2} \times \frac{F^2 L}{AY} \\ &= \frac{1}{2} \times \frac{(50)^2 \times 20 \times 10^{-2}}{2 \times 10^{-4} \times 1.4 \times 10^{11}} = 8.57 \times 10^{-6} \text{ J} \end{aligned}$$

$$17. \quad (b) \quad U = \frac{F^2}{2K} = \frac{T^2}{2K}$$

$$18. \quad (a) \quad \text{Energy stored per unit volume} = \frac{1}{2} \left(\frac{F}{A} \right) \left(\frac{l}{L} \right) = \frac{Fl}{2AL}$$

$$\begin{aligned} 19. \quad (c) \quad U &= \frac{1}{2} \times \frac{YAl^2}{L} = \frac{1}{2} \times \frac{2 \times 10^{11} \times 3 \times 10^{-6} \times (1 \times 10^{-3})^2}{4} \\ &= 0.075 \text{ J} \end{aligned}$$

$$20. \quad (d) \quad \text{At extension } l_1, \text{ the stored energy} = \frac{1}{2} Kl_1^2$$

$$\text{At extension } l_2, \text{ the stored energy} = \frac{1}{2} Kl_2^2$$

Work done in increasing its extension from l_1 to l_2

$$= \frac{1}{2} K(l_2^2 - l_1^2)$$

$$21. \quad (b) \quad K = \frac{F}{x} = \frac{40}{2 \times 10^{-2}} = 0.2 \text{ N/m}$$

$$\text{Work done} = \frac{1}{2} Kx^2 = \frac{1}{2} \times (0.2) \times (0.05)^2 = 2.5 \text{ J}$$

$$22. \quad (c)$$

$$23. \quad (c)$$

$$24. \quad (c) \quad W = \frac{YAl^2}{2L} = \frac{2 \times 10^{10} \times 10^{-6} \times (10^{-3})^2}{2 \times 50 \times 10^{-2}} = 2 \times 10^{-2} \text{ J}$$

$$\begin{aligned} 25. \quad (b) \quad U &= \frac{1}{2} \times Y \times (\text{Strain})^2 = \frac{1}{2} \times 9 \times 10^{11} \times \left(\frac{1}{100} \right)^2 \\ &= 4.5 \times 10^7 \text{ J} \end{aligned}$$

$$26. \quad (a) \quad W = \frac{1}{2} Fl = \frac{1}{2} \times Mg \times l = \frac{1}{2} \times 5 \times 10 \times 3 = 75 \text{ J}$$

$$27. \quad (b)$$

$$28. \quad (a)$$

$$29. \quad (a) \quad U = \frac{1}{2} \times F \times l = \frac{1}{2} \times 200 \times 10^{-3} = 0.1 \text{ J}$$

$$30. \quad (b) \quad U = \frac{1}{2} Fl = \frac{F^2 L}{2AY}. \quad U \propto \frac{L}{r^2} \quad (F \text{ and } Y \text{ are constant})$$

$$\therefore \frac{U_A}{U_B} = \left(\frac{L_A}{L_B} \right) \times \left(\frac{r_A}{r_B} \right)^2 = (3) \times \left(\frac{1}{2} \right)^2 = \frac{3}{4}$$

Critical Thinking Questions

$$1. \quad (b)$$

$$2. \quad (a) \quad L = \frac{P}{dg} = \frac{6}{3 \times 10^3 \times 10} = \frac{100}{3} = 34 \text{ m}$$

$$3. \quad (c) \quad \text{Thermal stress} = Y\alpha\Delta\theta.$$

If thermal stress and rise in temperature are equal then

$$Y \propto \frac{1}{\alpha} \Rightarrow \frac{Y_1}{Y_2} = \frac{\alpha_2}{\alpha_1} = \frac{3}{2}$$

$$4. \quad (a) \quad \text{Speed of sound in a stretched string } v = \sqrt{\frac{T}{\mu}} \quad \dots(i)$$

Where T is the tension in the string and μ is mass per unit length.

According to Hooke's law, $F \propto x \therefore T \propto x \quad \dots(ii)$

From (i) and (ii) $v \propto \sqrt{x} \therefore v' = \sqrt{1.5} v = 1.22 v$

$$\begin{aligned} 5. \quad (c) \quad \text{Total force at height } 3L/4 \text{ from its lower end} \\ = \text{Weight suspended} + \text{Weight of } 3/4 \text{ of the chain} \\ = W_1 + (3W/4) \end{aligned}$$

$$\text{Hence stress} = \frac{W_1 + (3W/4)}{S}$$

$$6. \quad (d) \quad l = \frac{FL}{AY} \therefore l \propto \frac{1}{r^2} \quad (F, L \text{ and } Y \text{ are constant})$$

$$\frac{l_1}{l_2} = \left(\frac{r_2}{r_1} \right)^2 = (2)^2 = 4$$

$$7. \quad (c) \quad \text{Restoring force is zero at mean position}$$

$$F = -Kx + F_0 \Rightarrow 0 = -Kx + F_0 \Rightarrow x = \frac{F_0}{K}$$

i.e. the particle will oscillate about $x = \frac{F_0}{K}$

$$8. \quad (b)$$

Graphical Questions

$$1. \quad (d) \quad T = 2\pi\sqrt{\frac{M}{K}} \Rightarrow T^2 \propto M$$

If we draw a graph between T^2 and M then it will be straight line.

and for $M = 0$, $T = 0$

i.e. the graph should pass through the origin.

but from the it is not reflected it means the mass of pan was neglected.

$$2. \quad (a) \quad \text{In the region } OA, \text{ stress} \propto \text{strain i.e. Hooke's law hold good.}$$

$$3. \quad (c)$$

$$4. \quad (c)$$

$$5. \quad (d) \quad \text{As stress is shown on } x\text{-axis and strain on } y\text{-axis}$$

$$\text{So we can say that } Y = \cot \theta = \frac{1}{\tan \theta} = \frac{1}{\text{slope}}$$

So elasticity of wire P is minimum and of wire R is maximum

$$6. \quad (a) \quad \text{Area of hysteresis loop gives the energy loss in the process of stretching and unstretching of rubber band and this loss will appear in the form of heating.}$$

$$7. \quad (d) \quad \frac{Y_A}{Y_B} = \frac{\tan \theta_A}{\tan \theta_B} = \frac{\tan 60}{\tan 30} = \frac{\sqrt{3}}{1/\sqrt{3}} = 3 \Rightarrow Y_A = 3Y_B$$

$$8. \quad (a) \quad l = \frac{FL}{AY} \therefore l \propto \frac{1}{r^2} \quad (Y, L \text{ and } F \text{ are constant})$$

i.e. for the same load, thickest wire will show minimum elongation. So graph D represent the thickest wire.

$$9. \quad (a) \quad \text{From the graph } l = 10^{-4} \text{ m}, F = 20 \text{ N}$$

$$A = 10^{-6} \text{ m}^2, L = 1 \text{ m}$$

480 Elasticity

$$\therefore Y = \frac{FL}{Al} = \frac{20 \times 1}{10^{-6} \times 10^{-4}} = 20 \times 10^{10} = 2 \times 10^{11} \text{ N/m}^2$$

10. (b) At point b, yielding of material starts.
11. (c) Graph between applied force and extension will be straight line because in elastic range,
Applied force \propto extension
but the graph between extension and stored elastic energy will be parabolic in nature
As $U = 1/2 kx^2$ or $U \propto x^2$.
12. (b) $F = -\left(\frac{dU}{dx}\right)$.
In the region BC slope of the graph is positive
 $\therefore F = \text{negative i.e. force is attractive in nature}$
In the region AB slope of the graph is negative
 $\therefore F = \text{positive i.e. force is repulsive in nature}$
13. (b) Force constant, $K = \tan 30^\circ = 1/\sqrt{3}$
14. (b) In ductile materials, yield point exist while in Brittle material, failure would occur without yielding.
15. (d) Young's modulus is defined only in elastic region and
$$Y = \frac{\text{Stress}}{\text{Strain}} = \frac{8 \times 10^7}{4 \times 10^{-4}} = 2 \times 10^{11} \text{ N/m}^2$$
16. (a) Elasticity of wire decreases at high temperature i.e. at higher temperature slope of graph will be less.
So we can say that $T_1 > T_2$
17. (c)
18. (d) Attraction will be minimum when the distance between the molecule is maximum.
Attraction will be maximum at that point where the positive slope is maximum because $F = -\frac{dU}{dx}$
19. (c) $Y = \tan \theta$. According to figure $\theta_A > \theta_B > \theta_C$
i.e. $\tan \theta_A > \tan \theta_B > \tan \theta_C$
or $Y_A > Y_B > Y_C$
 $\therefore A, B,$ and C graph are for steel, brass and rubber respectively.


5. (a)
6. (a) Bulk modulus of elasticity measures how good the body is to regain its original volume on being compressed. Therefore, it represents incompressibility of the material. $K = \frac{-PV}{\Delta V}$ where P is increase in pressure, ΔV is change in volume.
7. (c) Strain is the ratio of change in dimensions of the body to the original dimensions. Because this is a ratio, therefore it is dimensionless quantity.
8. (a) A bridge during its use undergoes alternating strains for a large number of times each day, depending upon the movement of vehicles on it when a bridge is used for long time, it losses its elastic strength. Due to which the amount of strain in the bridge for a given stress will become large and ultimately, the bridge may collapse. This may not happen, if the bridges are declared unsafe after long use.
9. (d) Ivory is more elastic than wet-clay. Hence the ball of ivory will rise to a greater height. In fact the ball of wet-clay will not rise at all, it will be somewhat flattened permanently.
10. (a) Young's modulus of a material, $Y = \frac{\text{Stress}}{\text{Strain}}$
Here, stress = $\frac{\text{Restoring force}}{\text{Area}}$.
As restoring force is zero $\therefore Y = 0$.
11. (a) Work done = $\frac{1}{2} \times \text{Stress} \times \text{Strain} = \frac{1}{2} \times Y \times (\text{Strain})^2$.
Since, elasticity of steel is more than copper, hence more work has to be done in order to stretch the steel.
12. (b) Stress is defined as internal force (restoring force) per unit area of a body. Also, rubber is less elastic than steel, because restoring force is less for rubber than steel.

Assertion and Reason

1. (a) Because, the stretching of coil simply changes its shape without any change in the length of the wire used in coil. Due to which shear modulus of elasticity is involved.
2. (e) When a spring balance has been used for a long time, the spring in the balance fatigued and there is loss of strength of the spring. In such a case, the extension in the spring is more for a given load and hence the balance gives wrong readings.
3. (a) Elasticity is a measure of tendency of the body to regain its original configuration. As steel is deformed less than rubber therefore steel is more elastic than rubber.
4. (d) In a glassy solid (i.e., amorphous solid) the various bonds between the atoms or ions or molecules of a solid are not equally strong. Different bonds are broken at different temperatures. Hence there is no sharp melting point for a glassy solid.

Elasticity

SET Self Evaluation Test -9

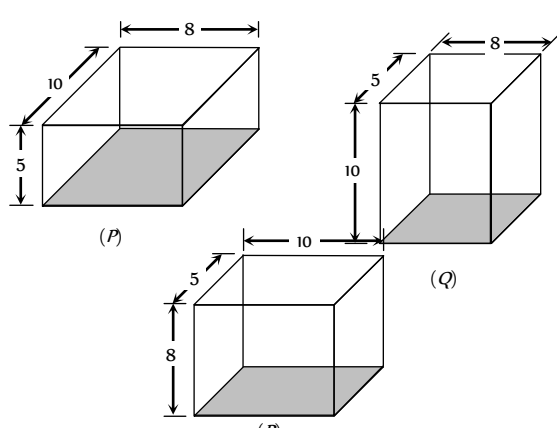- Two wires A and B of same length, same area of cross-section having the same Young's modulus are heated to the same range of temperature. If the coefficient of linear expansion of A is $3/2$ times of that of wire B . The ratio of the forces produced in two wires will be
 (a) $2/3$ (b) $9/4$
 (c) $4/9$ (d) $3/2$
- A wire of area of cross-section 10^{-6} m^2 is increased in length by 0.1% . The tension produced is 1000 N . The Young's modulus of wire is
 (a) 10^{12} N/m^2 (b) 10^{11} N/m^2
 (c) 10^{10} N/m^2 (d) 10^9 N/m^2
- To break a wire of one meter length, minimum 40 kg wt. is required. Then the wire of the same material of double radius and 6 m length will require breaking weight
 (a) 80 kg-wt (b) 240 kg-wt
 (c) 200 kg-wt (d) 160 kg-wt
- The breaking stress of a wire of length L and radius r is 5 kg-wt/m^2 . The wire of length $2L$ and radius $2r$ of the same material will have breaking stress in kg-wt/m^2
 (a) 5 (b) 10
 (c) 20 (d) 80
- The increase in length on stretching a wire is 0.05% . If its Poisson's ratio is 0.4 , then its diameter
 (a) Reduce by 0.02% (b) Reduce by 0.1%
 (c) Increase by 0.02% (d) Decrease by 0.4%
- If Poisson's ratio σ is $-\frac{1}{2}$ for a material, then the material is
 (a) Uncompressible (b) Elastic fatigue
 (c) Compressible (d) None of the above
- If the breaking force for a given wire is F , then the breaking force of two wires of same magnitude will be
 (a) F (b) $4F$
 (c) $8F$ (d) $2F$
- If the thickness of the wire is doubled, then the breaking force in the above question will be
 (a) $6F$ (b) $4F$
 (c) $8F$ (d) F
- On all the six surfaces of a unit cube, equal tensile force of F is applied. The increase in length of each side will be (Y = Young's modulus, σ = Poisson's ratio)
 (a) $\frac{F}{Y(1-\sigma)}$ (b) $\frac{F}{Y(1+\sigma)}$
 (c) $\frac{F(1-2\sigma)}{Y}$ (d) $\frac{F}{Y(1+2\sigma)}$
- The mass and length of a wire are M and L respectively. The density of the material of the wire is d . On applying the force F on the wire, the increase in length is l , then the Young's modulus of the material of the wire will be
 (a) $\frac{Fdl}{Ml}$ (b) $\frac{FL}{Mdl}$
 (c) $\frac{FMl}{dl}$ (d) $\frac{FdL^2}{Ml}$
- Two exactly similar wires of steel and copper are stretched by equal forces. If the difference in their elongations is 0.5 cm , the elongation (l) of each wire is
 $Y_s(\text{steel}) = 2.0 \times 10^{11} \text{ N/m}^2$
 $Y_c(\text{copper}) = 1.2 \times 10^{11} \text{ N/m}^2$
 (a) $l_s = 0.75 \text{ cm}, l_c = 1.25 \text{ cm}$
 (b) $l_s = 1.25 \text{ cm}, l_c = 0.75 \text{ cm}$
 (c) $l_s = 0.25 \text{ cm}, l_c = 0.75 \text{ cm}$
 (d) $l_s = 0.75 \text{ cm}, l_c = 0.25 \text{ cm}$
- If the compressibility of water is σ per unit atmospheric pressure, then the decrease in volume V due to P atmospheric pressure will be
 (a) $\sigma P / V$ (b) σPV
 (c) σ / PV (d) $\sigma V / P$
- A rectangular block of size $10 \text{ cm} \times 8 \text{ cm} \times 5 \text{ cm}$ is kept in three different positions P , Q and R in turn as shown in the figure. In each case, the shaded area is rigidly fixed and a definite force F is applied tangentially to the opposite face to deform the block. The displacement of the upper face will be

 (a) Same in all the three cases
 (b) Maximum in P position
 (c) Maximum in Q position
 (d) Maximum in R position

1. (d) $F = YA \alpha \Delta \theta$

If Y , A and $\Delta \theta$ are constant then $\frac{F_A}{F_B} = \frac{\alpha_A}{\alpha_B} = \frac{3}{2}$

2. (a) $Y = \frac{FL}{Al} = \frac{1000 \times 100}{10^{-6} \times 0.1} = 10^{12} \text{ N/m}^2$

3. (d) Breaking force = Breaking stress \times Area of cross section of wire

\therefore Breaking force $\propto r$ (Breaking distance is constant)

If radius becomes doubled then breaking force will become 4 times i.e. $40 \times 4 = 160 \text{ kg wt}$

4. (a) Breaking stress depends on the material of wire.

5. (a) Poisson's ratio = $\frac{\text{Lateral strain}}{\text{Longitudinal strain}}$

\therefore Lateral strain = $0.4 \times \frac{0.05}{100}$

So reduced by 0.02%.

6. (a) $\frac{dV}{V} = (1 + 2\sigma) \frac{dL}{dL}$

if $\sigma = -\frac{1}{2}$ then $\frac{dV}{V} = 0$ i.e. $K = \infty$

7. (d) Breaking force \propto Area of cross section

If area is double then breaking force will become two times.

8. (b) Breaking force $\propto \pi r^2$

If thickness (radius) of wire is doubled then breaking force will become four times.

9. (c) Tensile strain on each face = $\frac{F}{Y}$

Lateral strain due to the other two forces acting on perpendicular faces = $\frac{-2\sigma F}{Y}$

Total increase in length = $(1 - 2\sigma) \frac{F}{Y}$

10. (d) $Y = \frac{F}{A} \frac{L}{l} = \frac{FdL^2}{Ml}$

As $M = \text{volume} \times \text{density} = A \times L \times d \therefore A = \frac{M}{Ld}$

11. (a) $l \propto \frac{1}{Y} \Rightarrow \frac{Y_s}{Y_c} = \frac{l_c}{l_s} \Rightarrow \frac{l_c}{l_s} = \frac{2 \times 10^{11}}{1.2 \times 10^{11}} = \frac{5}{3} \dots(i)$

Also $l_c - l_s = 0.5 \dots(ii)$

On solving (i) and (ii) $l_c = 1.25 \text{ cm}$ and $l_s = 0.75 \text{ cm}$.

12. (b) Compressibility = $\frac{\Delta V/V}{P} \Rightarrow \sigma = \frac{\Delta V}{PV} \Rightarrow \Delta V = \sigma PV$

13. (d) $\eta = \frac{F/A}{x/L} \Rightarrow x = \frac{L}{\eta} \times \frac{F}{A}$

If η and F are constant then $x \propto \frac{L}{A}$

For maximum displacement area at which force applied should be minimum and vertical side should be maximum, this is given in the R position of rectangular block.