



PUZZLER

All three of these commonplace items use magnetism to store information. The cassette can store more than an hour of music, the floppy disk can hold the equivalent of hundreds of pages of information, and many hours of television programming can be recorded on the videotape. How do these devices work?
(George Semple)

chapter

30

Sources of the Magnetic Field

Chapter Outline

- | | |
|--|---|
| 30.1 The Biot–Savart Law | 30.6 Gauss’s Law in Magnetism |
| 30.2 The Magnetic Force Between Two Parallel Conductors | 30.7 Displacement Current and the General Form of Ampère’s Law |
| 30.3 Ampère’s Law | 30.8 (Optional) Magnetism in Matter |
| 30.4 The Magnetic Field of a Solenoid | 30.9 (Optional) The Magnetic Field of the Earth |
| 30.5 Magnetic Flux | |

In the preceding chapter, we discussed the magnetic force exerted on a charged particle moving in a magnetic field. To complete the description of the magnetic interaction, this chapter deals with the origin of the magnetic field—moving charges. We begin by showing how to use the law of Biot and Savart to calculate the magnetic field produced at some point in space by a small current element. Using this formalism and the principle of superposition, we then calculate the total magnetic field due to various current distributions. Next, we show how to determine the force between two current-carrying conductors, which leads to the definition of the ampere. We also introduce Ampère’s law, which is useful in calculating the magnetic field of a highly symmetric configuration carrying a steady current.

This chapter is also concerned with the complex processes that occur in magnetic materials. All magnetic effects in matter can be explained on the basis of atomic magnetic moments, which arise both from the orbital motion of the electrons and from an intrinsic property of the electrons known as spin.

30.1 THE BIOT–SAVART LAW

Shortly after Oersted’s discovery in 1819 that a compass needle is deflected by a current-carrying conductor, Jean-Baptiste Biot (1774–1862) and Félix Savart (1791–1841) performed quantitative experiments on the force exerted by an electric current on a nearby magnet. From their experimental results, Biot and Savart arrived at a mathematical expression that gives the magnetic field at some point in space in terms of the current that produces the field. That expression is based on the following experimental observations for the magnetic field $d\mathbf{B}$ at a point P associated with a length element $d\mathbf{s}$ of a wire carrying a steady current I (Fig. 30.1):

Properties of the magnetic field created by an electric current

- The vector $d\mathbf{B}$ is perpendicular both to $d\mathbf{s}$ (which points in the direction of the current) and to the unit vector $\hat{\mathbf{r}}$ directed from $d\mathbf{s}$ to P .
- The magnitude of $d\mathbf{B}$ is inversely proportional to r^2 , where r is the distance from $d\mathbf{s}$ to P .
- The magnitude of $d\mathbf{B}$ is proportional to the current and to the magnitude ds of the length element $d\mathbf{s}$.
- The magnitude of $d\mathbf{B}$ is proportional to $\sin \theta$, where θ is the angle between the vectors $d\mathbf{s}$ and $\hat{\mathbf{r}}$.

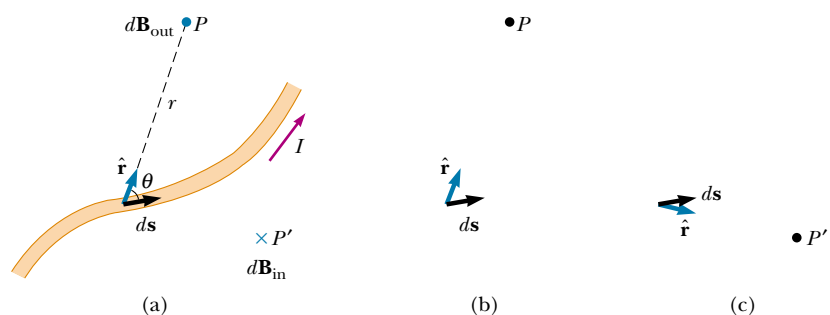


Figure 30.1 (a) The magnetic field $d\mathbf{B}$ at point P due to the current I through a length element $d\mathbf{s}$ is given by the Biot–Savart law. The direction of the field is out of the page at P and into the page at P' . (b) The cross product $d\mathbf{s} \times \hat{\mathbf{r}}$ points out of the page when $\hat{\mathbf{r}}$ points toward P . (c) The cross product $d\mathbf{s} \times \hat{\mathbf{r}}$ points into the page when $\hat{\mathbf{r}}$ points toward P' .

These observations are summarized in the mathematical formula known today as the **Biot–Savart law**:

$$d\mathbf{B} = \frac{\mu_0}{4\pi} \frac{I d\mathbf{s} \times \hat{\mathbf{r}}}{r^2} \quad (30.1)$$

Biot–Savart law

where μ_0 is a constant called the **permeability of free space**:

$$\mu_0 = 4\pi \times 10^{-7} \text{ T} \cdot \text{m/A} \quad (30.2)$$

Permeability of free space

It is important to note that the field $d\mathbf{B}$ in Equation 30.1 is the field created by the current in only a small length element $d\mathbf{s}$ of the conductor. To find the total magnetic field \mathbf{B} created at some point by a current of finite size, we must sum up contributions from all current elements $I d\mathbf{s}$ that make up the current. That is, we must evaluate \mathbf{B} by integrating Equation 30.1:

$$\mathbf{B} = \frac{\mu_0 I}{4\pi} \int \frac{d\mathbf{s} \times \hat{\mathbf{r}}}{r^2} \quad (30.3)$$

where the integral is taken over the entire current distribution. This expression must be handled with special care because the integrand is a cross product and therefore a vector quantity. We shall see one case of such an integration in Example 30.1.

Although we developed the Biot–Savart law for a current-carrying wire, it is also valid for a current consisting of charges flowing through space, such as the electron beam in a television set. In that case, $d\mathbf{s}$ represents the length of a small segment of space in which the charges flow.

Interesting similarities exist between the Biot–Savart law for magnetism and Coulomb’s law for electrostatics. The current element produces a magnetic field, whereas a point charge produces an electric field. Furthermore, the magnitude of the magnetic field varies as the inverse square of the distance from the current element, as does the electric field due to a point charge. However, the directions of the two fields are quite different. The electric field created by a point charge is radial, but the magnetic field created by a current element is perpendicular to both the length element $d\mathbf{s}$ and the unit vector $\hat{\mathbf{r}}$, as described by the cross product in Equation 30.1. Hence, if the conductor lies in the plane of the page, as shown in Figure 30.1, $d\mathbf{B}$ points out of the page at P and into the page at P' .

Another difference between electric and magnetic fields is related to the source of the field. An electric field is established by an isolated electric charge. The Biot–Savart law gives the magnetic field of an isolated current element at some point, but such an isolated current element cannot exist the way an isolated electric charge can. A current element *must* be part of an extended current distribution because we must have a complete circuit in order for charges to flow. Thus, the Biot–Savart law is only the first step in a calculation of a magnetic field; it must be followed by an integration over the current distribution.

In the examples that follow, it is important to recognize that **the magnetic field determined in these calculations is the field created by a current-carrying conductor**. This field is not to be confused with any additional fields that may be present outside the conductor due to other sources, such as a bar magnet placed nearby.

EXAMPLE 30.1 Magnetic Field Surrounding a Thin, Straight Conductor

Consider a thin, straight wire carrying a constant current I and placed along the x axis as shown in Figure 30.2. Determine the magnitude and direction of the magnetic field at point P due to this current.

Solution From the Biot–Savart law, we expect that the magnitude of the field is proportional to the current in the wire and decreases as the distance a from the wire to point P increases. We start by considering a length element $d\mathbf{s}$ located a distance r from P . The direction of the magnetic field at point P due to the current in this element is out of the page because $d\mathbf{s} \times \hat{\mathbf{r}}$ is out of the page. In fact, since *all* of the current elements $I d\mathbf{s}$ lie in the plane of the page, they all produce a magnetic field directed out of the page at point P . Thus, we have the direction of the magnetic field at point P , and we need only find the magnitude.

Taking the origin at O and letting point P be along the positive y axis, with \mathbf{k} being a unit vector pointing out of the page, we see that

$$d\mathbf{s} \times \hat{\mathbf{r}} = \mathbf{k} |d\mathbf{s} \times \hat{\mathbf{r}}| = \mathbf{k}(dx \sin \theta)$$

where, from Chapter 3, $|d\mathbf{s} \times \hat{\mathbf{r}}|$ represents the magnitude of $d\mathbf{s} \times \hat{\mathbf{r}}$. Because $\hat{\mathbf{r}}$ is a unit vector, the unit of the cross product is simply the unit of $d\mathbf{s}$, which is length. Substitution into Equation 30.1 gives

$$d\mathbf{B} = (dB) \mathbf{k} = \frac{\mu_0 I}{4\pi} \frac{dx \sin \theta}{r^2} \mathbf{k}$$

Because all current elements produce a magnetic field in the \mathbf{k} direction, let us restrict our attention to the magnitude of the field due to one current element, which is

$$(1) \quad dB = \frac{\mu_0 I}{4\pi} \frac{dx \sin \theta}{r^2}$$

To integrate this expression, we must relate the variables θ , x , and r . One approach is to express x and r in terms of θ . From the geometry in Figure 30.2a, we have

$$(2) \quad r = \frac{a}{\sin \theta} = a \csc \theta$$

Because $\tan \theta = a/(-x)$ from the right triangle in Figure 30.2a (the negative sign is necessary because $d\mathbf{s}$ is located at a negative value of x), we have

$$x = -a \cot \theta$$

Taking the derivative of this expression gives

$$(3) \quad dx = a \csc^2 \theta d\theta$$

Substitution of Equations (2) and (3) into Equation (1) gives

$$(4) \quad dB = \frac{\mu_0 I}{4\pi} \frac{a \csc^2 \theta \sin \theta d\theta}{a^2 \csc^2 \theta} = \frac{\mu_0 I}{4\pi a} \sin \theta d\theta$$

an expression in which the only variable is θ . We can now obtain the magnitude of the magnetic field at point P by integrating Equation (4) over all elements, subtending angles ranging from θ_1 to θ_2 as defined in Figure 30.2b:

$$B = \frac{\mu_0 I}{4\pi a} \int_{\theta_1}^{\theta_2} \sin \theta d\theta = \frac{\mu_0 I}{4\pi a} (\cos \theta_1 - \cos \theta_2) \quad (30.4)$$

We can use this result to find the magnetic field of any straight current-carrying wire if we know the geometry and hence the angles θ_1 and θ_2 . Consider the special case of an infinitely long, straight wire. If we let the wire in Figure 30.2b become infinitely long, we see that $\theta_1 = 0$ and $\theta_2 = \pi$ for length elements ranging between positions $x = -\infty$ and $x = +\infty$. Because $(\cos \theta_1 - \cos \theta_2) = (\cos 0 - \cos \pi) = 2$, Equation 30.4 becomes

$$B = \frac{\mu_0 I}{2\pi a} \quad (30.5)$$

Equations 30.4 and 30.5 both show that the magnitude of

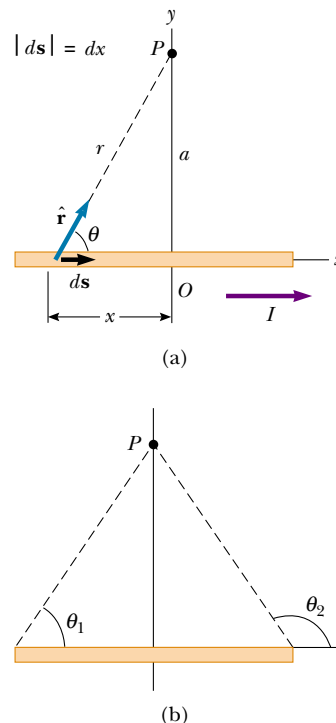


Figure 30.2 (a) A thin, straight wire carrying a current I . The magnetic field at point P due to the current in each element $d\mathbf{s}$ of the wire is out of the page, so the net field at point P is also out of the page. (b) The angles θ_1 and θ_2 , used for determining the net field. When the wire is infinitely long, $\theta_1 = 0$ and $\theta_2 = 180^\circ$.

the magnetic field is proportional to the current and decreases with increasing distance from the wire, as we expected. Notice that Equation 30.5 has the same mathematical form as the expression for the magnitude of the electric field due to a long charged wire (see Eq. 24.7).

Exercise Calculate the magnitude of the magnetic field 4.0 cm from an infinitely long, straight wire carrying a current of 5.0 A.

Answer 2.5×10^{-5} T.

The result of Example 30.1 is important because a current in the form of a long, straight wire occurs often. Figure 30.3 is a three-dimensional view of the magnetic field surrounding a long, straight current-carrying wire. Because of the symmetry of the wire, the magnetic field lines are circles concentric with the wire and lie in planes perpendicular to the wire. The magnitude of \mathbf{B} is constant on any circle of radius a and is given by Equation 30.5. A convenient rule for determining the direction of \mathbf{B} is to grasp the wire with the right hand, positioning the thumb along the direction of the current. The four fingers wrap in the direction of the magnetic field.

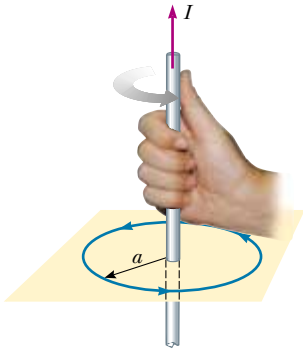


Figure 30.3 The right-hand rule for determining the direction of the magnetic field surrounding a long, straight wire carrying a current. Note that the magnetic field lines form circles around the wire.

EXAMPLE 30.2 Magnetic Field Due to a Curved Wire Segment

Calculate the magnetic field at point O for the current-carrying wire segment shown in Figure 30.4. The wire consists of two straight portions and a circular arc of radius R , which subtends an angle θ . The arrowheads on the wire indicate the direction of the current.

Solution The magnetic field at O due to the current in the straight segments AA' and CC' is zero because $d\mathbf{s}$ is parallel to $\hat{\mathbf{r}}$ along these paths; this means that $d\mathbf{s} \times \hat{\mathbf{r}} = 0$. Each length element $d\mathbf{s}$ along path AC is at the same distance R from O , and the current in each contributes a field element $d\mathbf{B}$ directed into the page at O . Furthermore, at every point on AC , $d\mathbf{s}$ is perpendicular to $\hat{\mathbf{r}}$; hence, $|d\mathbf{s} \times \hat{\mathbf{r}}| = ds$. Using this information and Equation 30.1, we can find the magnitude of the field at O due to the current in an element of length ds :

$$dB = \frac{\mu_0 I}{4\pi} \frac{ds}{R^2}$$

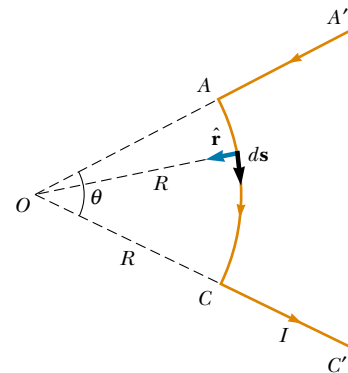


Figure 30.4 The magnetic field at O due to the current in the curved segment AC is into the page. The contribution to the field at O due to the current in the two straight segments is zero.

Because I and R are constants, we can easily integrate this expression over the curved path AC :

$$B = \frac{\mu_0 I}{4\pi R^2} \int ds = \frac{\mu_0 I}{4\pi R^2} s = \frac{\mu_0 I}{4\pi R} \theta \quad (30.6)$$

where we have used the fact that $s = R\theta$ with θ measured in

radians. The direction of \mathbf{B} is into the page at O because $d\mathbf{s} \times \hat{\mathbf{r}}$ is into the page for every length element.

Exercise A circular wire loop of radius R carries a current I . What is the magnitude of the magnetic field at its center?

Answer $\mu_0 I/2R$.

EXAMPLE 30.3 Magnetic Field on the Axis of a Circular Current Loop

Consider a circular wire loop of radius R located in the yz plane and carrying a steady current I , as shown in Figure 30.5. Calculate the magnetic field at an axial point P a distance x from the center of the loop.

Solution In this situation, note that every length element $d\mathbf{s}$ is perpendicular to the vector $\hat{\mathbf{r}}$ at the location of the element. Thus, for any element, $d\mathbf{s} \times \hat{\mathbf{r}} = (ds)(1) \sin 90^\circ = ds$. Furthermore, all length elements around the loop are at the same distance r from P , where $r^2 = x^2 + R^2$. Hence, the magnitude of $d\mathbf{B}$ due to the current in any length element $d\mathbf{s}$ is

$$dB = \frac{\mu_0 I}{4\pi} \frac{|d\mathbf{s} \times \hat{\mathbf{r}}|}{r^2} = \frac{\mu_0 I}{4\pi} \frac{ds}{(x^2 + R^2)}$$

The direction of $d\mathbf{B}$ is perpendicular to the plane formed by $\hat{\mathbf{r}}$ and $d\mathbf{s}$, as shown in Figure 30.5. We can resolve this vector into a component dB_x along the x axis and a component dB_y perpendicular to the x axis. When the components dB_y are summed over all elements around the loop, the resultant component is zero. That is, by symmetry the current in any element on one side of the loop sets up a perpendicular component of $d\mathbf{B}$ that cancels the perpendicular component set up by the current through the element diametrically opposite it. Therefore, the resultant field at P must be along the x axis and we can find it by integrating the components $dB_x = dB \cos \theta$. That is, $\mathbf{B} = B_x \hat{\mathbf{i}}$, where

$$B_x = \oint dB \cos \theta = \frac{\mu_0 I}{4\pi} \oint \frac{ds \cos \theta}{x^2 + R^2}$$

and we must take the integral over the entire loop. Because θ , x , and R are constants for all elements of the loop and because $\cos \theta = R/(x^2 + R^2)^{1/2}$, we obtain

$$B_x = \frac{\mu_0 IR}{4\pi(x^2 + R^2)^{3/2}} \oint ds = \frac{\mu_0 IR^2}{2(x^2 + R^2)^{3/2}} \quad (30.7)$$

where we have used the fact that $\oint ds = 2\pi R$ (the circumference of the loop).

To find the magnetic field at the center of the loop, we set $x = 0$ in Equation 30.7. At this special point, therefore,

$$B = \frac{\mu_0 I}{2R} \quad (\text{at } x = 0) \quad (30.8)$$

which is consistent with the result of the exercise in Example 30.2.

It is also interesting to determine the behavior of the magnetic field far from the loop—that is, when x is much greater than R . In this case, we can neglect the term R^2 in the denominator of Equation 30.7 and obtain

$$B \approx \frac{\mu_0 IR^2}{2x^3} \quad (\text{for } x \gg R) \quad (30.9)$$

Because the magnitude of the magnetic moment μ of the loop is defined as the product of current and loop area (see Eq. 29.10)— $\mu = I(\pi R^2)$ for our circular loop—we can express Equation 30.9 as

$$B \approx \frac{\mu_0}{2\pi} \frac{\mu}{x^3} \quad (30.10)$$

This result is similar in form to the expression for the electric field due to an electric dipole, $E = k_e(2qa/y^3)$ (see Example

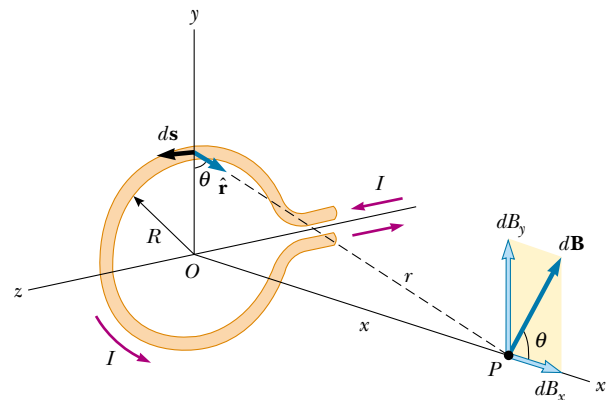


Figure 30.5 Geometry for calculating the magnetic field at a point P lying on the axis of a current loop. By symmetry, the total field \mathbf{B} is along this axis.

23.6), where $2qa = p$ is the electric dipole moment as defined in Equation 26.16.

The pattern of the magnetic field lines for a circular current loop is shown in Figure 30.6a. For clarity, the lines are

drawn for only one plane—one that contains the axis of the loop. Note that the field-line pattern is axially symmetric and looks like the pattern around a bar magnet, shown in Figure 30.6c.

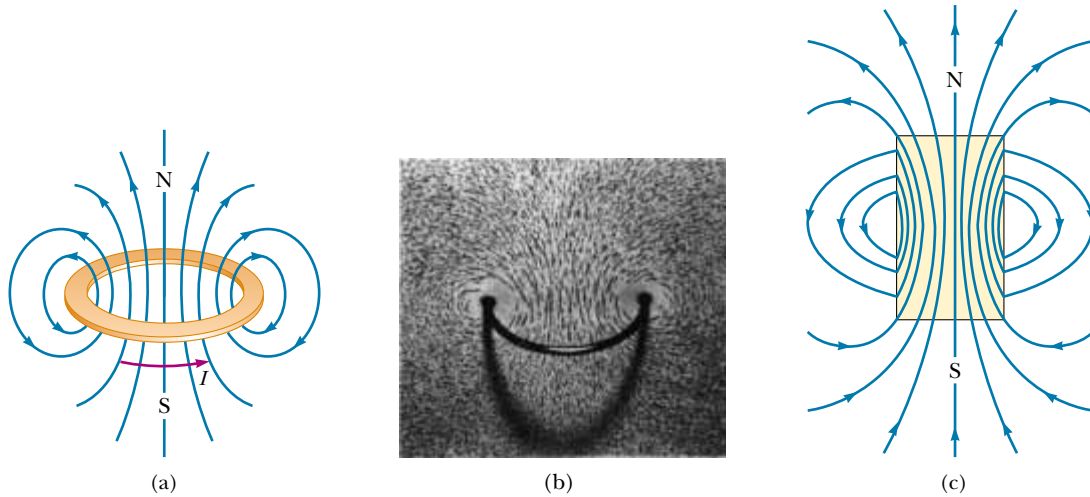


Figure 30.6 (a) Magnetic field lines surrounding a current loop. (b) Magnetic field lines surrounding a current loop, displayed with iron filings (Education Development Center, Newton, MA). (c) Magnetic field lines surrounding a bar magnet. Note the similarity between this line pattern and that of a current loop.

30.2 THE MAGNETIC FORCE BETWEEN TWO PARALLEL CONDUCTORS

In Chapter 29 we described the magnetic force that acts on a current-carrying conductor placed in an external magnetic field. Because a current in a conductor sets up its own magnetic field, it is easy to understand that two current-carrying conductors exert magnetic forces on each other. As we shall see, such forces can be used as the basis for defining the ampere and the coulomb.

Consider two long, straight, parallel wires separated by a distance a and carrying currents I_1 and I_2 in the same direction, as illustrated in Figure 30.7. We can determine the force exerted on one wire due to the magnetic field set up by the other wire. Wire 2, which carries a current I_2 , creates a magnetic field \mathbf{B}_2 at the location of wire 1. The direction of \mathbf{B}_2 is perpendicular to wire 1, as shown in Figure 30.7. According to Equation 29.3, the magnetic force on a length ℓ of wire 1 is $\mathbf{F}_1 = I_1 \ell \times \mathbf{B}_2$. Because ℓ is perpendicular to \mathbf{B}_2 in this situation, the magnitude of \mathbf{F}_1 is $F_1 = I_1 \ell B_2$. Because the magnitude of \mathbf{B}_2 is given by Equation 30.5, we see that

$$F_1 = I_1 \ell B_2 = I_1 \ell \left(\frac{\mu_0 I_2}{2\pi a} \right) = \frac{\mu_0 I_1 I_2}{2\pi a} \ell \quad (30.11)$$

The direction of \mathbf{F}_1 is toward wire 2 because $\ell \times \mathbf{B}_2$ is in that direction. If the field set up at wire 2 by wire 1 is calculated, the force \mathbf{F}_2 acting on wire 2 is found to be equal in magnitude and opposite in direction to \mathbf{F}_1 . This is what we expect be-




Figure 30.7 Two parallel wires that each carry a steady current exert a force on each other. The field \mathbf{B}_2 due to the current in wire 2 exerts a force of magnitude $F_1 = I_1 \ell B_2$ on wire 1. The force is attractive if the currents are parallel (as shown) and repulsive if the currents are antiparallel.

cause Newton's third law must be obeyed.¹ When the currents are in opposite directions (that is, when one of the currents is reversed in Fig. 30.7), the forces are reversed and the wires repel each other. Hence, we find that **parallel conductors carrying currents in the same direction attract each other, and parallel conductors carrying currents in opposite directions repel each other.**

Because the magnitudes of the forces are the same on both wires, we denote the magnitude of the magnetic force between the wires as simply F_B . We can rewrite this magnitude in terms of the force per unit length:

$$\frac{F_B}{\ell} = \frac{\mu_0 I_1 I_2}{2\pi a} \quad (30.12)$$

The force between two parallel wires is used to define the **ampere** as follows:

Definition of the ampere

When the magnitude of the force per unit length between two long, parallel wires that carry identical currents and are separated by 1 m is 2×10^{-7} N/m, the current in each wire is defined to be 1 A.

web

Visit <http://physics.nist.gov/cuu/Units/ampere.html> for more information.

The value 2×10^{-7} N/m is obtained from Equation 30.12 with $I_1 = I_2 = 1$ A and $a = 1$ m. Because this definition is based on a force, a mechanical measurement can be used to standardize the ampere. For instance, the National Institute of Standards and Technology uses an instrument called a *current balance* for primary current measurements. The results are then used to standardize other, more conventional instruments, such as ammeters.

The SI unit of charge, the **coulomb**, is defined in terms of the ampere:

Definition of the coulomb

When a conductor carries a steady current of 1 A, the quantity of charge that flows through a cross-section of the conductor in 1 s is 1 C.

In deriving Equations 30.11 and 30.12, we assumed that both wires are long compared with their separation distance. In fact, only one wire needs to be long. The equations accurately describe the forces exerted on each other by a long wire and a straight parallel wire of limited length ℓ .

Quick Quiz 30.1

For $I_1 = 2$ A and $I_2 = 6$ A in Figure 30.7, which is true: (a) $F_1 = 3F_2$, (b) $F_1 = F_2/3$, or (c) $F_1 = F_2$?

Quick Quiz 30.2

A loose spiral spring is hung from the ceiling, and a large current is sent through it. Do the coils move closer together or farther apart?

¹ Although the total force exerted on wire 1 is equal in magnitude and opposite in direction to the total force exerted on wire 2, Newton's third law does not apply when one considers two small elements of the wires that are not exactly opposite each other. This apparent violation of Newton's third law and of the law of conservation of momentum is described in more advanced treatments on electricity and magnetism.

30.3 AMPÈRE'S LAW



Oersted's 1819 discovery about deflected compass needles demonstrates that a current-carrying conductor produces a magnetic field. Figure 30.8a shows how this effect can be demonstrated in the classroom. Several compass needles are placed in a horizontal plane near a long vertical wire. When no current is present in the wire, all the needles point in the same direction (that of the Earth's magnetic field), as expected. When the wire carries a strong, steady current, the needles all deflect in a direction tangent to the circle, as shown in Figure 30.8b. These observations demonstrate that the direction of the magnetic field produced by the current in the wire is consistent with the right-hand rule described in Figure 30.3. When the current is reversed, the needles in Figure 30.8b also reverse.

Because the compass needles point in the direction of \mathbf{B} , we conclude that the lines of \mathbf{B} form circles around the wire, as discussed in the preceding section. By symmetry, the magnitude of \mathbf{B} is the same everywhere on a circular path centered on the wire and lying in a plane perpendicular to the wire. By varying the current and distance a from the wire, we find that B is proportional to the current and inversely proportional to the distance from the wire, as Equation 30.5 describes.

Now let us evaluate the product $\mathbf{B} \cdot d\mathbf{s}$ for a small length element $d\mathbf{s}$ on the circular path defined by the compass needles, and sum the products for all elements over the closed circular path. Along this path, the vectors $d\mathbf{s}$ and \mathbf{B} are parallel at each point (see Fig. 30.8b), so $\mathbf{B} \cdot d\mathbf{s} = B ds$. Furthermore, the magnitude of \mathbf{B} is constant on this circle and is given by Equation 30.5. Therefore, the sum of the products $B ds$ over the closed path, which is equivalent to the line integral of $\mathbf{B} \cdot d\mathbf{s}$, is

$$\oint \mathbf{B} \cdot d\mathbf{s} = B \oint ds = \frac{\mu_0 I}{2\pi r} (2\pi r) = \mu_0 I$$

where $\oint ds = 2\pi r$ is the circumference of the circular path. Although this result was calculated for the special case of a circular path surrounding a wire, it holds



Andre-Marie Ampère

(1775–1836) Ampère, a Frenchman, is credited with the discovery of electromagnetism—the relationship between electric currents and magnetic fields. Ampère's genius, particularly in mathematics, became evident by the time he was 12 years old; his personal life, however, was filled with tragedy. His father, a wealthy city official, was guillotined during the French Revolution, and his wife died young, in 1803. Ampère died at the age of 61 of pneumonia. His judgment of his life is clear from the epitaph he chose for his gravestone: *Tandem Felix* (Happy at Last). (AIP Emilio Segre Visual Archive)

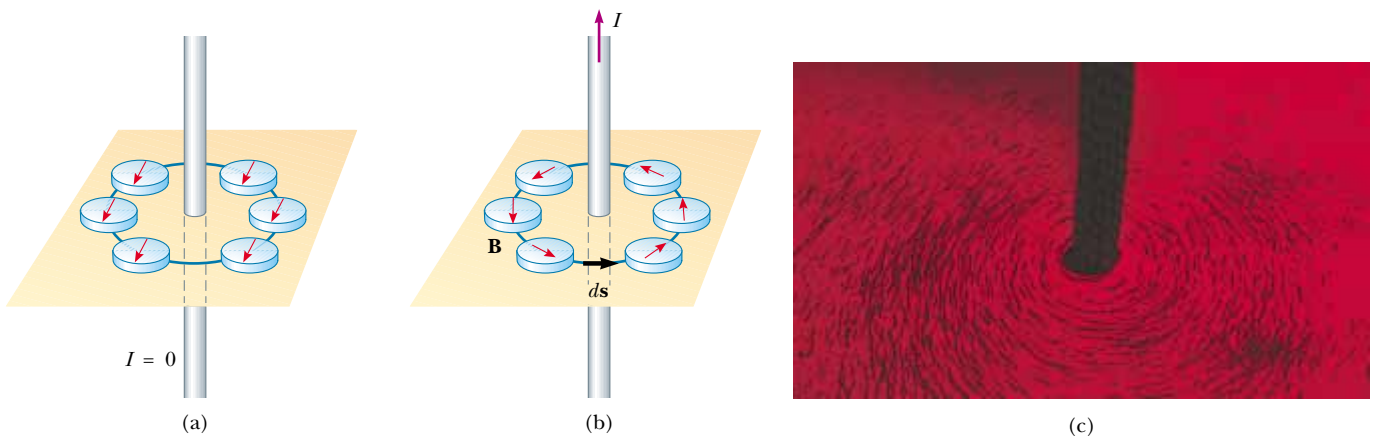


Figure 30.8 (a) When no current is present in the wire, all compass needles point in the same direction (toward the Earth's north pole). (b) When the wire carries a strong current, the compass needles deflect in a direction tangent to the circle, which is the direction of the magnetic field created by the current. (c) Circular magnetic field lines surrounding a current-carrying conductor, displayed with iron filings.

for a closed path of *any* shape surrounding a *current* that exists in an unbroken circuit. The general case, known as **Ampère's law**, can be stated as follows:

The line integral of $\mathbf{B} \cdot d\mathbf{s}$ around any closed path equals $\mu_0 I$, where I is the total continuous current passing through any surface bounded by the closed path.

Ampère's law

$$\oint \mathbf{B} \cdot d\mathbf{s} = \mu_0 I \quad (30.13)$$

Ampère's law describes the creation of magnetic fields by all continuous current configurations, but at our mathematical level it is useful only for calculating the magnetic field of current configurations having a high degree of symmetry. Its use is similar to that of Gauss's law in calculating electric fields for highly symmetric charge distributions.

Quick Quiz 30.3

Rank the magnitudes of $\oint \mathbf{B} \cdot d\mathbf{s}$ for the closed paths in Figure 30.9, from least to greatest.

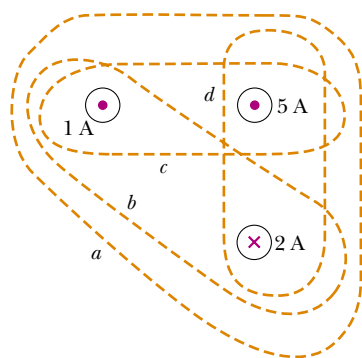


Figure 30.9 Four closed paths around three current-carrying wires.

Quick Quiz 30.4

Rank the magnitudes of $\oint \mathbf{B} \cdot d\mathbf{s}$ for the closed paths in Figure 30.10, from least to greatest.

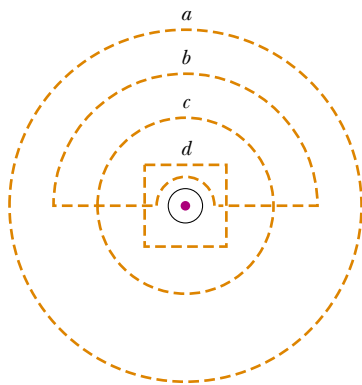


Figure 30.10 Several closed paths near a single current-carrying wire.

EXAMPLE 30.4 The Magnetic Field Created by a Long Current-Carrying Wire

A long, straight wire of radius R carries a steady current I_0 that is uniformly distributed through the cross-section of the wire (Fig. 30.11). Calculate the magnetic field a distance r from the center of the wire in the regions $r \geq R$ and $r < R$.

Solution For the $r \geq R$ case, we should get the same result we obtained in Example 30.1, in which we applied the Biot–Savart law to the same situation. Let us choose for our path of integration circle 1 in Figure 30.11. From symmetry, \mathbf{B} must be constant in magnitude and parallel to $d\mathbf{s}$ at every point on this circle. Because the total current passing through the plane of the circle is I_0 , Ampère's law gives

$$\oint \mathbf{B} \cdot d\mathbf{s} = B \oint ds = B(2\pi r) = \mu_0 I_0$$

$$B = \frac{\mu_0 I_0}{2\pi r} \quad (\text{for } r \geq R) \quad (30.14)$$

which is identical in form to Equation 30.5. Note how much easier it is to use Ampère's law than to use the Biot–Savart law. This is often the case in highly symmetric situations.

Now consider the interior of the wire, where $r < R$. Here the current I passing through the plane of circle 2 is less than the total current I_0 . Because the current is uniform over the cross-section of the wire, the fraction of the current enclosed

by circle 2 must equal the ratio of the area πr^2 enclosed by circle 2 to the cross-sectional area πR^2 of the wire:²

$$\frac{I}{I_0} = \frac{\pi r^2}{\pi R^2}$$

$$I = \frac{r^2}{R^2} I_0$$

Following the same procedure as for circle 1, we apply Ampère's law to circle 2:

$$\oint \mathbf{B} \cdot d\mathbf{s} = B(2\pi r) = \mu_0 I = \mu_0 \left(\frac{r^2}{R^2} I_0 \right)$$

$$B = \left(\frac{\mu_0 I_0}{2\pi R^2} \right) r \quad (\text{for } r < R) \quad (30.15)$$

This result is similar in form to the expression for the electric field inside a uniformly charged sphere (see Example 24.5). The magnitude of the magnetic field versus r for this configuration is plotted in Figure 30.12. Note that inside the wire, $B \rightarrow 0$ as $r \rightarrow 0$. Note also that Equations 30.14 and 30.15 give the same value of the magnetic field at $r = R$, demonstrating that the magnetic field is continuous at the surface of the wire.




Figure 30.11 A long, straight wire of radius R carrying a steady current I_0 uniformly distributed across the cross-section of the wire. The magnetic field at any point can be calculated from Ampère's law using a circular path of radius r , concentric with the wire.

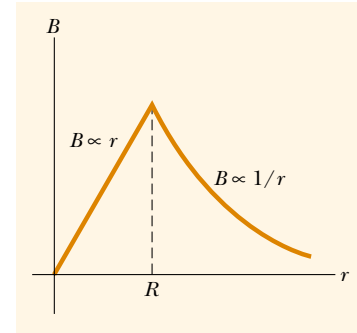


Figure 30.12 Magnitude of the magnetic field versus r for the wire shown in Figure 30.11. The field is proportional to r inside the wire and varies as $1/r$ outside the wire.

EXAMPLE 30.5 The Magnetic Field Created by a Toroid

A device called a *toroid* (Fig. 30.13) is often used to create an almost uniform magnetic field in some enclosed area. The device consists of a conducting wire wrapped around a ring (a *torus*) made of a nonconducting material. For a toroid hav-

ing N closely spaced turns of wire, calculate the magnetic field in the region occupied by the torus, a distance r from the center.

² Another way to look at this problem is to see that the current enclosed by circle 2 must equal the product of the current density $J = I_0/\pi R^2$ and the area πr^2 of this circle.

Solution To calculate this field, we must evaluate $\oint \mathbf{B} \cdot d\mathbf{s}$ over the circle of radius r in Figure 30.13. By symmetry, we see that the magnitude of the field is constant on this circle and tangent to it, so $\mathbf{B} \cdot d\mathbf{s} = B ds$. Furthermore, note that

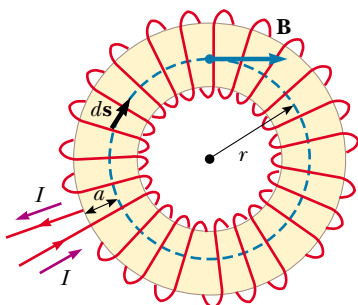


Figure 30.13 A toroid consisting of many turns of wire. If the turns are closely spaced, the magnetic field in the interior of the torus (the gold-shaded region) is tangent to the dashed circle and varies as $1/r$. The field outside the toroid is zero. The dimension a is the cross-sectional radius of the torus.

the circular closed path surrounds N loops of wire, each of which carries a current I . Therefore, the right side of Equation 30.13 is $\mu_0 NI$ in this case.

Ampère's law applied to the circle gives

$$\oint \mathbf{B} \cdot d\mathbf{s} = B \oint ds = B(2\pi r) = \mu_0 NI$$

$$B = \frac{\mu_0 NI}{2\pi r} \quad (30.16)$$

This result shows that B varies as $1/r$ and hence is nonuniform in the region occupied by the torus. However, if r is very large compared with the cross-sectional radius of the torus, then the field is approximately uniform inside the torus.

For an ideal toroid, in which the turns are closely spaced, the external magnetic field is zero. This can be seen by noting that the net current passing through any circular path lying outside the toroid (including the region of the "hole in the doughnut") is zero. Therefore, from Ampère's law we find that $B = 0$ in the regions exterior to the torus.

EXAMPLE 30.6 Magnetic Field Created by an Infinite Current Sheet

So far we have imagined currents through wires of small cross-section. Let us now consider an example in which a current exists in an extended object. A thin, infinitely large sheet lying in the yz plane carries a current of linear current density \mathbf{J}_s . The current is in the y direction, and J_s represents the current per unit length measured along the z axis. Find the magnetic field near the sheet.

Solution This situation brings to mind similar calculations involving Gauss's law (see Example 24.8). You may recall that

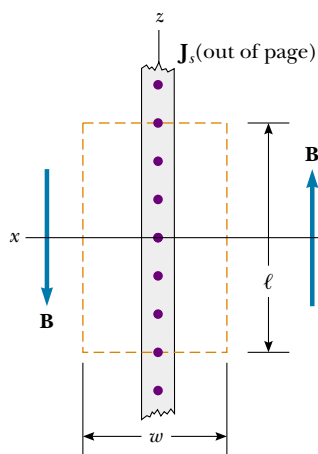


Figure 30.14 End view of an infinite current sheet lying in the yz plane, where the current is in the y direction (out of the page). This view shows the direction of \mathbf{B} on both sides of the sheet.

the electric field due to an infinite sheet of charge does not depend on distance from the sheet. Thus, we might expect a similar result here for the magnetic field.

To evaluate the line integral in Ampère's law, let us take a rectangular path through the sheet, as shown in Figure 30.14. The rectangle has dimensions ℓ and w , with the sides of length ℓ parallel to the sheet surface. The net current passing through the plane of the rectangle is $J_s \ell$. We apply Ampère's law over the rectangle and note that the two sides of length w do not contribute to the line integral because the component of \mathbf{B} along the direction of these paths is zero. By symmetry, we can argue that the magnetic field is constant over the sides of length ℓ because every point on the infinitely large sheet is equivalent, and hence the field should not vary from point to point. The only choices of field direction that are reasonable for the symmetry are perpendicular or parallel to the sheet, and a perpendicular field would pass *through* the current, which is inconsistent with the Biot-Savart law. Assuming a field that is constant in magnitude and parallel to the plane of the sheet, we obtain

$$\oint \mathbf{B} \cdot d\mathbf{s} = \mu_0 I = \mu_0 J_s \ell$$

$$2B\ell = \mu_0 J_s \ell$$

$$B = \mu_0 \frac{J_s}{2}$$

This result shows that *the magnetic field is independent of distance from the current sheet*, as we suspected.

EXAMPLE 30.7 The Magnetic Force on a Current Segment

Wire 1 in Figure 30.15 is oriented along the y axis and carries a steady current I_1 . A rectangular loop located to the right of the wire and in the xy plane carries a current I_2 . Find the magnetic force exerted by wire 1 on the top wire of length b in the loop, labeled “Wire 2” in the figure.

Solution You may be tempted to use Equation 30.12 to obtain the force exerted on a small segment of length dx of wire 2. However, this equation applies only to two *parallel* wires and cannot be used here. The correct approach is to

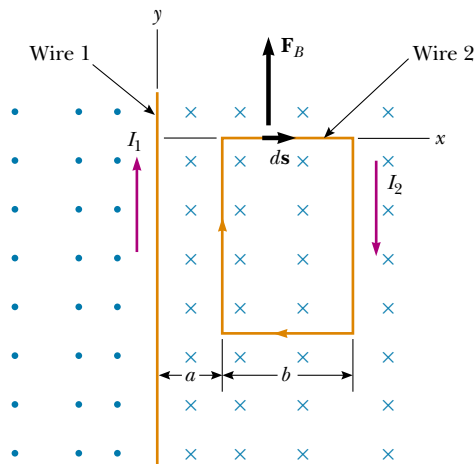


Figure 30.15

consider the force exerted by wire 1 on a small segment $d\mathbf{s}$ of wire 2 by using Equation 29.4. This force is given by $d\mathbf{F}_B = I d\mathbf{s} \times \mathbf{B}$, where $I = I_2$ and \mathbf{B} is the magnetic field created by the current in wire 1 at the position of $d\mathbf{s}$. From Amperè's law, the field at a distance x from wire 1 (see Eq. 30.14) is

$$\mathbf{B} = \frac{\mu_0 I_1}{2\pi x} (-\mathbf{k})$$

where the unit vector $-\mathbf{k}$ is used to indicate that the field at $d\mathbf{s}$ points into the page. Because wire 2 is along the x axis, $d\mathbf{s} = dx\mathbf{i}$, and we find that

$$d\mathbf{F}_B = \frac{\mu_0 I_1 I_2}{2\pi x} [\mathbf{i} \times (-\mathbf{k})] dx = \frac{\mu_0 I_1 I_2}{2\pi} \frac{dx}{x} \mathbf{j}$$

Integrating over the limits $x = a$ to $x = a + b$ gives

$$\mathbf{F}_B = \frac{\mu_0 I_1 I_2}{2\pi} \ln x \Big|_a^{a+b} \mathbf{j} = \frac{\mu_0 I_1 I_2}{2\pi} \ln \left(1 + \frac{b}{a} \right) \mathbf{j}$$

The force points in the positive y direction, as indicated by the unit vector \mathbf{j} and as shown in Figure 30.15.

Exercise What are the magnitude and direction of the force exerted on the bottom wire of length b ?

Answer The force has the same magnitude as the force on wire 2 but is directed downward.

Quick Quiz 30.5

Is a net force acting on the current loop in Example 30.7? A net torque?

30.4 THE MAGNETIC FIELD OF A SOLENOID

A **solenoid** is a long wire wound in the form of a helix. With this configuration, a reasonably uniform magnetic field can be produced in the space surrounded by the turns of wire—which we shall call the *interior* of the solenoid—when the solenoid carries a current. When the turns are closely spaced, each can be approximated as a circular loop, and the net magnetic field is the vector sum of the fields resulting from all the turns.

Figure 30.16 shows the magnetic field lines surrounding a loosely wound solenoid. Note that the field lines in the interior are nearly parallel to one another, are uniformly distributed, and are close together, indicating that the field in this space is uniform and strong. The field lines between current elements on two adjacent turns tend to cancel each other because the field vectors from the two elements are in opposite directions. The field at exterior points such as P is weak because the field due to current elements on the right-hand portion of a turn tends to cancel the field due to current elements on the left-hand portion.

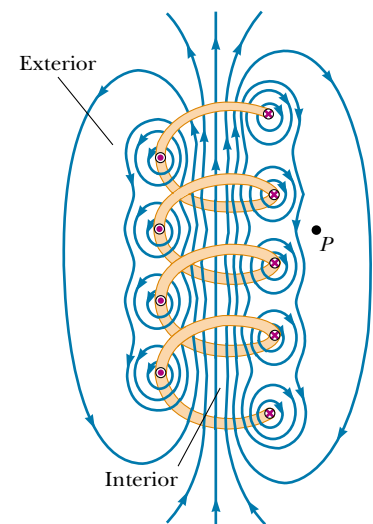


Figure 30.16 The magnetic field lines for a loosely wound solenoid.


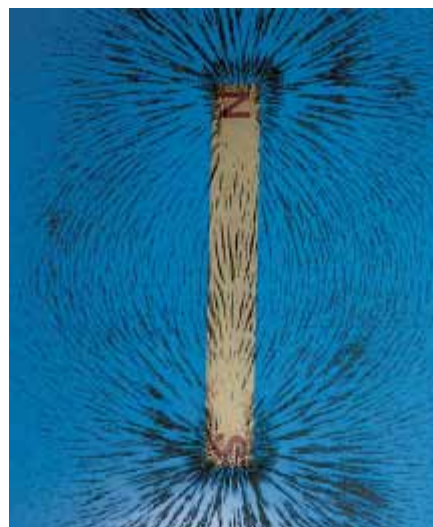


Figure 30.17 (a) Magnetic field lines for a tightly wound solenoid of finite length, carrying a steady current. The field in the interior space is nearly uniform and strong. Note that the field lines resemble those of a bar magnet, meaning that the solenoid effectively has north and south poles. (b) The magnetic field pattern of a bar magnet, displayed with small iron filings on a sheet of paper.

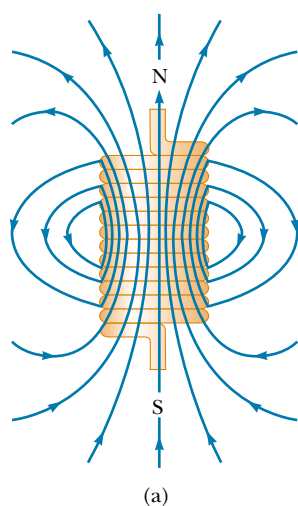

A technician studies the scan of a patient's head. The scan was obtained using a medical diagnostic technique known as magnetic resonance imaging (MRI). This instrument makes use of strong magnetic fields produced by superconducting solenoids.

If the turns are closely spaced and the solenoid is of finite length, the magnetic field lines are as shown in Figure 30.17a. This field line distribution is similar to that surrounding a bar magnet (see Fig. 30.17b). Hence, one end of the solenoid behaves like the north pole of a magnet, and the opposite end behaves like the south pole. As the length of the solenoid increases, the interior field becomes more uniform and the exterior field becomes weaker. An *ideal solenoid* is approached when the turns are closely spaced and the length is much greater than the radius of the turns. In this case, the external field is zero, and the interior field is uniform over a great volume.

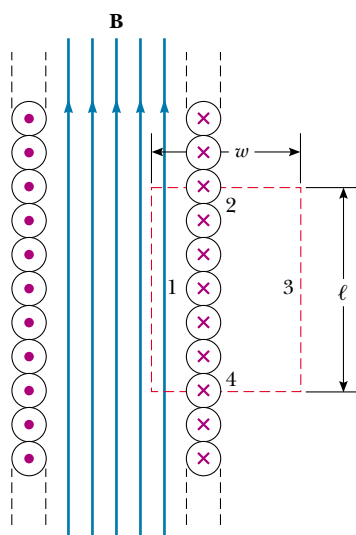


Figure 30.18 Cross-sectional view of an ideal solenoid, where the interior magnetic field is uniform and the exterior field is zero. Ampère's law applied to the red dashed path can be used to calculate the magnitude of the interior field.

We can use Ampère's law to obtain an expression for the interior magnetic field in an ideal solenoid. Figure 30.18 shows a longitudinal cross-section of part of such a solenoid carrying a current I . Because the solenoid is ideal, \mathbf{B} in the interior space is uniform and parallel to the axis, and \mathbf{B} in the exterior space is zero. Consider the rectangular path of length ℓ and width w shown in Figure 30.18. We can apply Ampère's law to this path by evaluating the integral of $\mathbf{B} \cdot d\mathbf{s}$ over each side of the rectangle. The contribution along side 3 is zero because $B = 0$ in this region. The contributions from sides 2 and 4 are both zero because \mathbf{B} is perpendicular to $d\mathbf{s}$ along these paths. Side 1 gives a contribution $B\ell$ to the integral because along this path \mathbf{B} is uniform and parallel to $d\mathbf{s}$. The integral over the closed rectangular path is therefore

$$\oint \mathbf{B} \cdot d\mathbf{s} = \int_{\text{path 1}} \mathbf{B} \cdot d\mathbf{s} = B \int_{\text{path 1}} ds = B\ell$$

The right side of Ampère's law involves the total current passing through the area bounded by the path of integration. In this case, the total current through the rectangular path equals the current through each turn multiplied by the number of turns. If N is the number of turns in the length ℓ , the total current through the rectangle is NI . Therefore, Ampère's law applied to this path gives

$$\oint \mathbf{B} \cdot d\mathbf{s} = B\ell = \mu_0 NI$$

$$B = \mu_0 \frac{N}{\ell} I = \mu_0 nI \quad (30.17)$$

where $n = N/\ell$ is the number of turns per unit length.

We also could obtain this result by reconsidering the magnetic field of a toroid (see Example 30.5). If the radius r of the torus in Figure 30.13 containing N turns is much greater than the toroid's cross-sectional radius a , a short section of the toroid approximates a solenoid for which $n = N/2\pi r$. In this limit, Equation 30.16 agrees with Equation 30.17.

Equation 30.17 is valid only for points near the center (that is, far from the ends) of a very long solenoid. As you might expect, the field near each end is smaller than the value given by Equation 30.17. At the very end of a long solenoid, the magnitude of the field is one-half the magnitude at the center.

QuickLab


Wrap a few turns of wire around a compass, essentially putting the compass inside a solenoid. Hold the ends of the wire to the two terminals of a flashlight battery. What happens to the compass? Is the effect as strong when the compass is outside the turns of wire?

Magnetic field inside a solenoid

web

For a more detailed discussion of the magnetic field along the axis of a solenoid, visit www.saunderscollege.com/physics/

30.5 MAGNETIC FLUX

 The flux associated with a magnetic field is defined in a manner similar to that used to define electric flux (see Eq. 24.3). Consider an element of area dA on an arbitrarily shaped surface, as shown in Figure 30.19. If the magnetic field at this element is \mathbf{B} , the magnetic flux through the element is $\mathbf{B} \cdot d\mathbf{A}$, where $d\mathbf{A}$ is a vector that is perpendicular to the surface and has a magnitude equal to the area dA . Hence, the total magnetic flux Φ_B through the surface is

$$\Phi_B \equiv \int \mathbf{B} \cdot d\mathbf{A} \quad (30.18)$$

Definition of magnetic flux

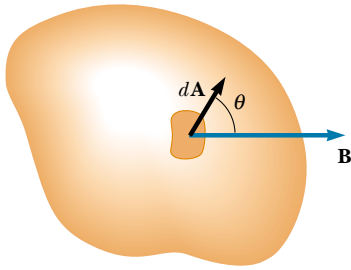


Figure 30.19 The magnetic flux through an area element $d\mathbf{A}$ is $\mathbf{B} \cdot d\mathbf{A} = B dA \cos \theta$, where $d\mathbf{A}$ is a vector perpendicular to the surface.

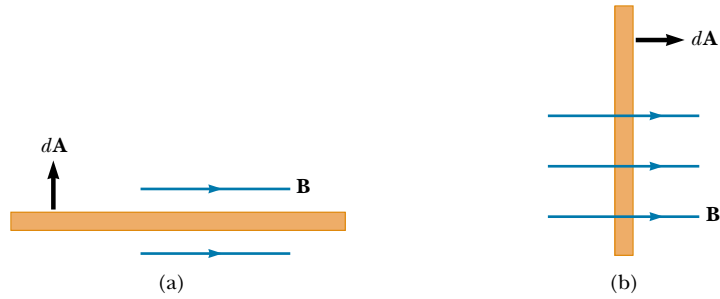


Figure 30.20 Magnetic flux through a plane lying in a magnetic field. (a) The flux through the plane is zero when the magnetic field is parallel to the plane surface. (b) The flux through the plane is a maximum when the magnetic field is perpendicular to the plane.

Consider the special case of a plane of area A in a uniform field \mathbf{B} that makes an angle θ with $d\mathbf{A}$. The magnetic flux through the plane in this case is

$$\Phi_B = BA \cos \theta \quad (30.19)$$

If the magnetic field is parallel to the plane, as in Figure 30.20a, then $\theta = 90^\circ$ and the flux is zero. If the field is perpendicular to the plane, as in Figure 30.20b, then $\theta = 0$ and the flux is BA (the maximum value).

The unit of flux is the $\text{T} \cdot \text{m}^2$, which is defined as a *weber* (Wb); $1 \text{ Wb} = 1 \text{ T} \cdot \text{m}^2$.

EXAMPLE 30.8 Magnetic Flux Through a Rectangular Loop

A rectangular loop of width a and length b is located near a long wire carrying a current I (Fig. 30.21). The distance between the wire and the closest side of the loop is c . The wire is parallel to the long side of the loop. Find the total magnetic flux through the loop due to the current in the wire.

Solution From Equation 30.14, we know that the magnitude of the magnetic field created by the wire at a distance r from the wire is

$$B = \frac{\mu_0 I}{2\pi r}$$

The factor $1/r$ indicates that the field varies over the loop, and Figure 30.21 shows that the field is directed into the page. Because \mathbf{B} is parallel to $d\mathbf{A}$ at any point within the loop, the magnetic flux through an area element dA is

$$\Phi_B = \int B dA = \int \frac{\mu_0 I}{2\pi r} dA$$

(Because B is not uniform but depends on r , it cannot be removed from the integral.)

To integrate, we first express the area element (the tan region in Fig. 30.21) as $dA = b dr$. Because r is now the only variable in the integral, we have

$$\begin{aligned} \Phi_B &= \frac{\mu_0 I b}{2\pi} \int_c^{a+c} \frac{dr}{r} = \frac{\mu_0 I b}{2\pi} \ln r \Big|_c^{a+c} \\ &= \frac{\mu_0 I b}{2\pi} \ln \left(\frac{a+c}{c} \right) = \frac{\mu_0 I b}{2\pi} \ln \left(1 + \frac{a}{c} \right) \end{aligned}$$

Exercise Apply the series expansion formula for $\ln(1+x)$ (see Appendix B.5) to this equation to show that it gives a reasonable result when the loop is far from the wire relative to the loop dimensions (in other words, when $c \gg a$).

Answer $\Phi_B \rightarrow 0$.

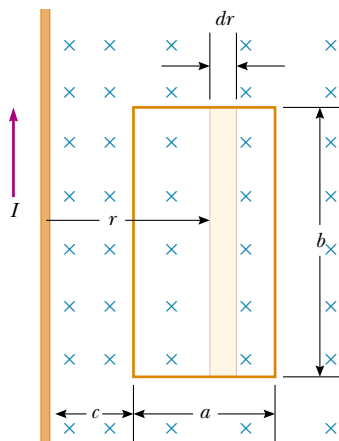


Figure 30.21 The magnetic field due to the wire carrying a current I is not uniform over the rectangular loop.

30.6 GAUSS'S LAW IN MAGNETISM

12.5 In Chapter 24 we found that the electric flux through a closed surface surrounding a net charge is proportional to that charge (Gauss's law). In other words, the number of electric field lines leaving the surface depends only on the net charge within it. This property is based on the fact that electric field lines originate and terminate on electric charges.

The situation is quite different for magnetic fields, which are continuous and form closed loops. In other words, magnetic field lines do not begin or end at any point—as illustrated by the magnetic field lines of the bar magnet in Figure 30.22. Note that for any closed surface, such as the one outlined by the dashed red line in Figure 30.22, the number of lines entering the surface equals the number leaving the surface; thus, the net magnetic flux is zero. In contrast, for a closed surface surrounding one charge of an electric dipole (Fig. 30.23), the net electric flux is not zero.

Gauss's law in magnetism states that

the net magnetic flux through any closed surface is always zero:

$$\oint \mathbf{B} \cdot d\mathbf{A} = 0 \quad (30.20)$$

Gauss's law for magnetism

This statement is based on the experimental fact, mentioned in the opening of Chapter 29, that **isolated magnetic poles (monopoles) have never been detected and perhaps do not exist**. Nonetheless, scientists continue the search be-

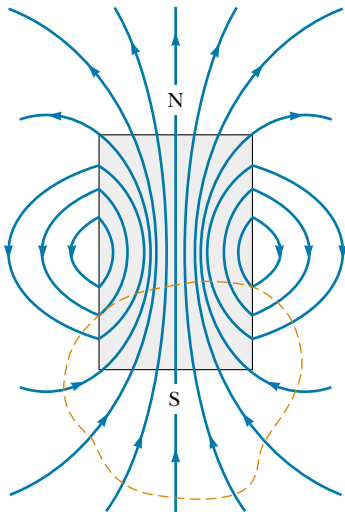


Figure 30.22 The magnetic field lines of a bar magnet form closed loops. Note that the net magnetic flux through the closed surface (dashed red line) surrounding one of the poles (or any other closed surface) is zero.

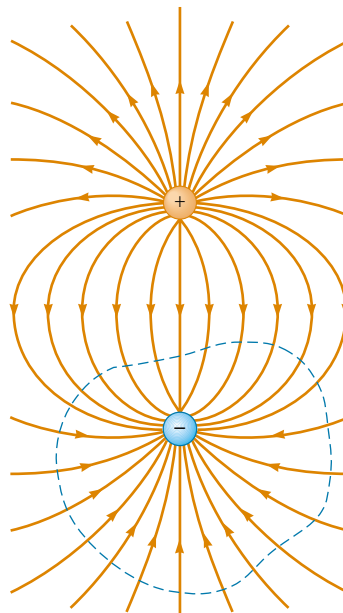


Figure 30.23 The electric field lines surrounding an electric dipole begin on the positive charge and terminate on the negative charge. The electric flux through a closed surface surrounding one of the charges is not zero.

cause certain theories that are otherwise successful in explaining fundamental physical behavior suggest the possible existence of monopoles.

30.7 DISPLACEMENT CURRENT AND THE GENERAL FORM OF AMPÈRE'S LAW

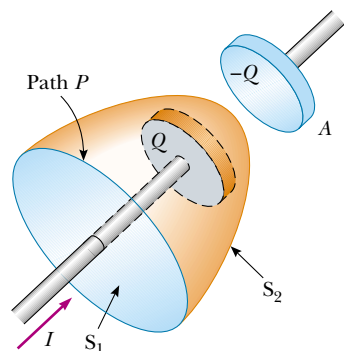


Figure 30.24 Two surfaces S_1 and S_2 near the plate of a capacitor are bounded by the same path P . The conduction current in the wire passes only through S_1 . This leads to a contradiction in Ampère's law that is resolved only if one postulates a displacement current through S_2 .



12.9

We have seen that charges in motion produce magnetic fields. When a current-carrying conductor has high symmetry, we can use Ampère's law to calculate the magnetic field it creates. In Equation 30.13, $\oint \mathbf{B} \cdot d\mathbf{s} = \mu_0 I$, the line integral is over any closed path through which the conduction current passes, and the conduction current is defined by the expression $I = dq/dt$. (In this section we use the term *conduction current* to refer to the current carried by the wire, to distinguish it from a new type of current that we shall introduce shortly.) We now show that **Ampère's law in this form is valid only if any electric fields present are constant in time**. Maxwell recognized this limitation and modified Ampère's law to include time-varying electric fields.

We can understand the problem by considering a capacitor that is being charged as illustrated in Figure 30.24. When a conduction current is present, the charge on the positive plate changes but *no conduction current passes across the gap between the plates*. Now consider the two surfaces S_1 and S_2 in Figure 30.24, bounded by the same path P . Ampère's law states that $\oint \mathbf{B} \cdot d\mathbf{s}$ around this path must equal $\mu_0 I$, where I is the total current through any surface bounded by the path P .

When the path P is considered as bounding S_1 , $\oint \mathbf{B} \cdot d\mathbf{s}$ is $\mu_0 I$ because the conduction current passes through S_1 . When the path is considered as bounding S_2 , however, $\oint \mathbf{B} \cdot d\mathbf{s} = 0$ because no conduction current passes through S_2 . Thus, we arrive at a contradictory situation that arises from the discontinuity of the current! Maxwell solved this problem by postulating an additional term on the right side of Equation 30.13, which includes a factor called the **displacement current** I_d , defined as³

$$I_d \equiv \epsilon_0 \frac{d\Phi_E}{dt} \quad (30.21)$$

where ϵ_0 is the permittivity of free space (see Section 23.3) and $\Phi_E = \int \mathbf{E} \cdot d\mathbf{A}$ is the electric flux (see Eq. 24.3).

As the capacitor is being charged (or discharged), the changing electric field between the plates may be considered equivalent to a current that acts as a continuation of the conduction current in the wire. When the expression for the displacement current given by Equation 30.21 is added to the conduction current on the right side of Ampère's law, the difficulty represented in Figure 30.24 is resolved. No matter which surface bounded by the path P is chosen, either conduction current or displacement current passes through it. With this new term I_d , we can express the general form of Ampère's law (sometimes called the **Ampère–Maxwell law**) as⁴

$$\oint \mathbf{B} \cdot d\mathbf{s} = \mu_0 (I + I_d) = \mu_0 I + \mu_0 \epsilon_0 \frac{d\Phi_E}{dt} \quad (30.22)$$

³ *Displacement* in this context does not have the meaning it does in Chapter 2. Despite the inaccurate implications, the word is historically entrenched in the language of physics, so we continue to use it.

⁴ Strictly speaking, this expression is valid only in a vacuum. If a magnetic material is present, one must change μ_0 and ϵ_0 on the right-hand side of Equation 30.22 to the permeability μ_m and permittivity ϵ characteristic of the material. Alternatively, one may include a magnetizing current I_m on the right-hand side of Equation 30.22 to make Ampère's law fully general. On a microscopic scale, I_m is as real as I .

Displacement current

Ampère–Maxwell law

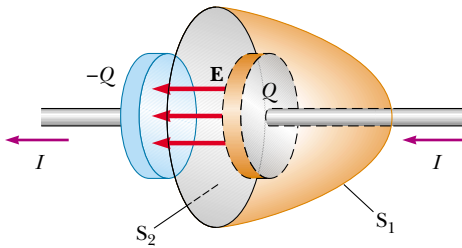


Figure 30.25 Because it exists only in the wires attached to the capacitor plates, the conduction current $I = dQ/dt$ passes through S_1 but not through S_2 . Only the displacement current $I_d = \epsilon_0 d\Phi_E/dt$ passes through S_2 . The two currents must be equal for continuity.

We can understand the meaning of this expression by referring to Figure 30.25. The electric flux through surface S_2 is $\Phi_E = \int \mathbf{E} \cdot d\mathbf{A} = EA$, where A is the area of the capacitor plates and E is the magnitude of the uniform electric field between the plates. If Q is the charge on the plates at any instant, then $E = Q/\epsilon_0 A$ (see Section 26.2). Therefore, the electric flux through S_2 is simply

$$\Phi_E = EA = \frac{Q}{\epsilon_0}$$

Hence, the displacement current through S_2 is

$$I_d = \epsilon_0 \frac{d\Phi_E}{dt} = \frac{dQ}{dt} \quad (30.23)$$

That is, the displacement current through S_2 is precisely equal to the conduction current I through S_1 !

By considering surface S_2 , we can identify the displacement current as the source of the magnetic field on the surface boundary. The displacement current has its physical origin in the time-varying electric field. The central point of this formalism, then, is that

magnetic fields are produced both by conduction currents and by time-varying electric fields.

This result was a remarkable example of theoretical work by Maxwell, and it contributed to major advances in the understanding of electromagnetism.

Quick Quiz 30.6

What is the displacement current for a fully charged 3- μF capacitor?

EXAMPLE 30.9 Displacement Current in a Capacitor

A sinusoidally varying voltage is applied across an 8.00- μF capacitor. The frequency of the voltage is 3.00 kHz, and the voltage amplitude is 30.0 V. Find the displacement current between the plates of the capacitor.

Solution The angular frequency of the source, from Equation 13.6, is $\omega = 2\pi f = 2\pi(3.00 \times 10^3 \text{ Hz}) = 1.88 \times 10^4 \text{ s}^{-1}$. Hence, the voltage across the capacitor in terms of t is

$$\Delta V = \Delta V_{\text{max}} \sin \omega t = (30.0 \text{ V}) \sin(1.88 \times 10^4 t)$$

We can use Equation 30.23 and the fact that the charge on

the capacitor is $Q = C\Delta V$ to find the displacement current:

$$\begin{aligned} I_d &= \frac{dQ}{dt} = \frac{d}{dt} (C\Delta V) = C \frac{d}{dt} (\Delta V) \\ &= (8.00 \times 10^{-6} \text{ F}) \frac{d}{dt} [(30.0 \text{ V}) \sin(1.88 \times 10^4 t)] \\ &= (4.52 \text{ A}) \cos(1.88 \times 10^4 t) \end{aligned}$$

The displacement current varies sinusoidally with time and has a maximum value of 4.52 A.

Optional Section

30.8 MAGNETISM IN MATTER

The magnetic field produced by a current in a coil of wire gives us a hint as to what causes certain materials to exhibit strong magnetic properties. Earlier we found that a coil like the one shown in Figure 30.17 has a north pole and a south pole. In general, *any* current loop has a magnetic field and thus has a magnetic dipole moment, including the atomic-level current loops described in some models of the atom. Thus, the magnetic moments in a magnetized substance may be described as arising from these atomic-level current loops. For the Bohr model of the atom, these current loops are associated with the movement of electrons around the nucleus in circular orbits. In addition, a magnetic moment is intrinsic to electrons, protons, neutrons, and other particles; it arises from a property called *spin*.

The Magnetic Moments of Atoms

It is instructive to begin our discussion with a classical model of the atom in which electrons move in circular orbits around the much more massive nucleus. In this model, an orbiting electron constitutes a tiny current loop (because it is a moving charge), and the magnetic moment of the electron is associated with this orbital motion. Although this model has many deficiencies, its predictions are in good agreement with the correct theory, which is expressed in terms of quantum physics.

Consider an electron moving with constant speed v in a circular orbit of radius r about the nucleus, as shown in Figure 30.26. Because the electron travels a distance of $2\pi r$ (the circumference of the circle) in a time T , its orbital speed is $v = 2\pi r/T$. The current I associated with this orbiting electron is its charge e divided by T . Using $T = 2\pi/\omega$ and $\omega = v/r$, we have

$$I = \frac{e}{T} = \frac{e\omega}{2\pi} = \frac{ev}{2\pi r}$$

The magnetic moment associated with this current loop is $\mu = IA$, where $A = \pi r^2$ is the area enclosed by the orbit. Therefore,

$$\mu = IA = \left(\frac{ev}{2\pi r}\right)\pi r^2 = \frac{1}{2}evr \quad (30.24)$$

Because the magnitude of the orbital angular momentum of the electron is $L = m_e vr$ (Eq. 11.16 with $\phi = 90^\circ$), the magnetic moment can be written as

$$\mu = \left(\frac{e}{2m_e}\right)L \quad (30.25)$$

This result demonstrates that **the magnetic moment of the electron is proportional to its orbital angular momentum**. Note that because the electron is negatively charged, the vectors μ and \mathbf{L} point in opposite directions. Both vectors are perpendicular to the plane of the orbit, as indicated in Figure 30.26.

A fundamental outcome of quantum physics is that orbital angular momentum is quantized and is equal to multiples of $\hbar = h/2\pi = 1.05 \times 10^{-34} \text{ J}\cdot\text{s}$, where h is Planck's constant. The smallest nonzero value of the electron's magnetic moment resulting from its orbital motion is

$$\mu = \sqrt{2} \frac{e}{2m_e} \hbar \quad (30.26)$$

We shall see in Chapter 42 how expressions such as Equation 30.26 arise.

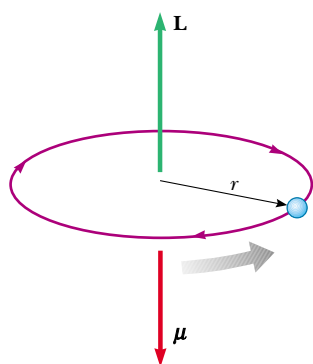


Figure 30.26 An electron moving in a circular orbit of radius r has an angular momentum \mathbf{L} in one direction and a magnetic moment μ in the opposite direction.

Orbital magnetic moment

Angular momentum is quantized

Because all substances contain electrons, you may wonder why not all substances are magnetic. The main reason is that in most substances, the magnetic moment of one electron in an atom is canceled by that of another electron orbiting in the opposite direction. The net result is that, for most materials, **the magnetic effect produced by the orbital motion of the electrons is either zero or very small.**

In addition to its orbital magnetic moment, an electron has an intrinsic property called **spin** that also contributes to its magnetic moment. In this regard, the electron can be viewed as spinning about its axis while it orbits the nucleus, as shown in Figure 30.27. (Warning: This classical description should not be taken literally because spin arises from relativistic dynamics that must be incorporated into a quantum-mechanical analysis.) The magnitude of the angular momentum S associated with spin is of the same order of magnitude as the angular momentum L due to the orbital motion. The magnitude of the spin angular momentum predicted by quantum theory is

$$S = \frac{\sqrt{3}}{2} \hbar$$

The magnetic moment characteristically associated with the spin of an electron has the value

$$\mu_{\text{spin}} = \frac{e\hbar}{2m_e} \quad (30.27)$$

This combination of constants is called the **Bohr magneton**:

$$\mu_B = \frac{e\hbar}{2m_e} = 9.27 \times 10^{-24} \text{ J/T} \quad (30.28)$$

Thus, atomic magnetic moments can be expressed as multiples of the Bohr magneton. (Note that $1 \text{ J/T} = 1 \text{ A} \cdot \text{m}^2$.)

In atoms containing many electrons, the electrons usually pair up with their spins opposite each other; thus, the spin magnetic moments cancel. However, atoms containing an odd number of electrons must have at least one unpaired electron and therefore some spin magnetic moment. The total magnetic moment of an atom is the vector sum of the orbital and spin magnetic moments, and a few examples are given in Table 30.1. Note that helium and neon have zero moments because their individual spin and orbital moments cancel.

The nucleus of an atom also has a magnetic moment associated with its constituent protons and neutrons. However, the magnetic moment of a proton or neutron is much smaller than that of an electron and can usually be neglected. We can understand this by inspecting Equation 30.28 and replacing the mass of the electron with the mass of a proton or a neutron. Because the masses of the proton and neutron are much greater than that of the electron, their magnetic moments are on the order of 10^3 times smaller than that of the electron.

Magnetization Vector and Magnetic Field Strength

The magnetic state of a substance is described by a quantity called the **magnetization vector \mathbf{M}** . The magnitude of this vector is defined as the magnetic moment per unit volume of the substance. As you might expect, the total magnetic field \mathbf{B} at a point within a substance depends on both the applied (external) field \mathbf{B}_0 and the magnetization of the substance.

To understand the problems involved in measuring the total magnetic field \mathbf{B} in such situations, consider this: Scientists use small probes that utilize the Hall ef-




Figure 30.27 Classical model of a spinning electron. This model gives an incorrect magnitude for the magnetic moment, incorrect quantum numbers, and too many degrees of freedom.

Spin angular momentum

Bohr magneton

TABLE 30.1
Magnetic Moments of Some Atoms and Ions

Atom or Ion	Magnetic Moment (10^{-24} J/T)
H	9.27
He	0
Ne	0
Ce ³⁺	19.8
Yb ³⁺	37.1

Magnetization vector \mathbf{M}

fect (see Section 29.6) to measure magnetic fields. What would such a probe read if it were positioned inside the solenoid mentioned in the QuickLab on page 951 when you inserted the compass? Because the compass is a magnetic material, the probe would measure a total magnetic field \mathbf{B} that is the sum of the solenoid (external) field \mathbf{B}_0 and the (magnetization) field \mathbf{B}_m due to the compass. This tells us that we need a way to distinguish between magnetic fields originating from currents and those originating from magnetic materials. Consider a region in which a magnetic field \mathbf{B}_0 is produced by a current-carrying conductor. If we now fill that region with a magnetic substance, the total magnetic field \mathbf{B} in the region is $\mathbf{B} = \mathbf{B}_0 + \mathbf{B}_m$, where \mathbf{B}_m is the field produced by the magnetic substance. We can express this contribution in terms of the magnetization vector of the substance as $\mathbf{B}_m = \mu_0 \mathbf{M}$; hence, the total magnetic field in the region becomes

$$\mathbf{B} = \mathbf{B}_0 + \mu_0 \mathbf{M} \quad (30.29)$$

Magnetic field strength \mathbf{H}

When analyzing magnetic fields that arise from magnetization, it is convenient to introduce a field quantity, called the **magnetic field strength \mathbf{H}** within the substance. The magnetic field strength represents the effect of the conduction currents in wires on a substance. To emphasize the distinction between the field strength \mathbf{H} and the field \mathbf{B} , the latter is often called the *magnetic flux density* or the *magnetic induction*. The magnetic field strength is a vector defined by the relationship $\mathbf{H} = \mathbf{B}_0/\mu_0 = (\mathbf{B}/\mu_0) - \mathbf{M}$. Thus, Equation 30.29 can be written

$$\mathbf{B} = \mu_0(\mathbf{H} + \mathbf{M}) \quad (30.30)$$

The quantities \mathbf{H} and \mathbf{M} have the same units. In SI units, because \mathbf{M} is magnetic moment per unit volume, the units are (ampere)(meter)²/(meter)³, or amperes per meter.

To better understand these expressions, consider the torus region of a toroid that carries a current I . If this region is a vacuum, $\mathbf{M} = 0$ (because no magnetic material is present), the total magnetic field is that arising from the current alone, and $\mathbf{B} = \mathbf{B}_0 = \mu_0 \mathbf{H}$. Because $B_0 = \mu_0 nI$ in the torus region, where n is the number of turns per unit length of the toroid, $H = B_0/\mu_0 = \mu_0 nI/\mu_0$, or

$$H = nI \quad (30.31)$$

In this case, the magnetic field B in the torus region is due only to the current in the windings of the toroid.

If the torus is now made of some substance and the current I is kept constant, \mathbf{H} in the torus region remains unchanged (because it depends on the current only) and has magnitude nI . The total field \mathbf{B} , however, is different from that when the torus region was a vacuum. From Equation 30.30, we see that part of \mathbf{B} arises from the term $\mu_0 \mathbf{H}$ associated with the current in the toroid, and part arises from the term $\mu_0 \mathbf{M}$ due to the magnetization of the substance of which the torus is made.

Classification of Magnetic Substances

Substances can be classified as belonging to one of three categories, depending on their magnetic properties. **Paramagnetic** and **ferromagnetic** materials are those made of atoms that have permanent magnetic moments. **Diamagnetic** materials are those made of atoms that do not have permanent magnetic moments.

For paramagnetic and diamagnetic substances, the magnetization vector \mathbf{M} is proportional to the magnetic field strength \mathbf{H} . For these substances placed in an external magnetic field, we can write

$$\mathbf{M} = \chi \mathbf{H} \quad (30.32)$$



Oxygen, a paramagnetic substance, is attracted to a magnetic field. The liquid oxygen in this photograph is suspended between the poles of the magnet.

TABLE 30.2 Magnetic Susceptibilities of Some Paramagnetic and Diamagnetic Substances at 300 K

Paramagnetic Substance	χ	Diamagnetic Substance	χ
Aluminum	2.3×10^{-5}	Bismuth	-1.66×10^{-5}
Calcium	1.9×10^{-5}	Copper	-9.8×10^{-6}
Chromium	2.7×10^{-4}	Diamond	-2.2×10^{-5}
Lithium	2.1×10^{-5}	Gold	-3.6×10^{-5}
Magnesium	1.2×10^{-5}	Lead	-1.7×10^{-5}
Niobium	2.6×10^{-4}	Mercury	-2.9×10^{-5}
Oxygen	2.1×10^{-6}	Nitrogen	-5.0×10^{-9}
Platinum	2.9×10^{-4}	Silver	-2.6×10^{-5}
Tungsten	6.8×10^{-5}	Silicon	-4.2×10^{-6}

where χ (Greek letter chi) is a dimensionless factor called the **magnetic susceptibility**. For paramagnetic substances, χ is positive and \mathbf{M} is in the same direction as \mathbf{H} . For diamagnetic substances, χ is negative and \mathbf{M} is opposite \mathbf{H} . (It is important to note that this linear relationship between \mathbf{M} and \mathbf{H} does not apply to ferromagnetic substances.) The susceptibilities of some substances are given in Table 30.2.

Substituting Equation 30.32 for \mathbf{M} into Equation 30.30 gives

$$\mathbf{B} = \mu_0(\mathbf{H} + \mathbf{M}) = \mu_0(\mathbf{H} + \chi\mathbf{H}) = \mu_0(1 + \chi)\mathbf{H}$$

or

$$\mathbf{B} = \mu_m \mathbf{H} \quad (30.33)$$

where the constant μ_m is called the **magnetic permeability** of the substance and is related to the susceptibility by

$$\mu_m = \mu_0(1 + \chi) \quad (30.34)$$

Substances may be classified in terms of how their magnetic permeability μ_m compares with μ_0 (the permeability of free space), as follows:

$$\text{Paramagnetic} \quad \mu_m > \mu_0$$

$$\text{Diamagnetic} \quad \mu_m < \mu_0$$

Because χ is very small for paramagnetic and diamagnetic substances (see Table 30.2), μ_m is nearly equal to μ_0 for these substances. For ferromagnetic substances, however, μ_m is typically several thousand times greater than μ_0 (meaning that χ is very great for ferromagnetic substances).

Although Equation 30.33 provides a simple relationship between \mathbf{B} and \mathbf{H} , we must interpret it with care when dealing with ferromagnetic substances. As mentioned earlier, \mathbf{M} is not a linear function of \mathbf{H} for ferromagnetic substances. This is because the value of μ_m is not only a characteristic of the ferromagnetic substance but also depends on the previous state of the substance and on the process it underwent as it moved from its previous state to its present one. We shall investigate this more deeply after the following example.

Magnetic susceptibility χ

Magnetic permeability μ_m

EXAMPLE 30.10 An Iron-Filled Toroid

A toroid wound with 60.0 turns/m of wire carries a current of 5.00 A. The torus is iron, which has a magnetic permeability of $\mu_m = 5\,000\mu_0$ under the given conditions. Find H and B inside the iron.

Solution Using Equations 30.31 and 30.33, we obtain

$$H = nI = \left(60.0 \frac{\text{turns}}{\text{m}}\right)(5.00 \text{ A}) = 300 \frac{\text{A} \cdot \text{turns}}{\text{m}}$$

$$B = \mu_m H = 5\,000\mu_0 H$$

$$= 5\,000 \left(4\pi \times 10^{-7} \frac{\text{T} \cdot \text{m}}{\text{A}}\right) \left(300 \frac{\text{A} \cdot \text{turns}}{\text{m}}\right) = 1.88 \text{ T}$$

This value of B is 5 000 times the value in the absence of iron!

Exercise Determine the magnitude of the magnetization vector inside the iron torus.

Answer $M = 1.5 \times 10^6 \text{ A/m}$.

Quick Quiz 30.7

A current in a solenoid having air in the interior creates a magnetic field $\mathbf{B} = \mu_0 \mathbf{H}$. Describe qualitatively what happens to the magnitude of \mathbf{B} as (a) aluminum, (b) copper, and (c) iron are placed in the interior.

Ferromagnetism

A small number of crystalline substances in which the atoms have permanent magnetic moments exhibit strong magnetic effects called **ferromagnetism**. Some examples of ferromagnetic substances are iron, cobalt, nickel, gadolinium, and dysprosium. These substances contain atomic magnetic moments that tend to align parallel to each other even in a weak external magnetic field. Once the moments are aligned, the substance remains magnetized after the external field is removed. This permanent alignment is due to a strong coupling between neighboring moments, a coupling that can be understood only in quantum-mechanical terms.

All ferromagnetic materials are made up of microscopic regions called **domains**, regions within which all magnetic moments are aligned. These domains have volumes of about 10^{-12} to 10^{-8} m^3 and contain 10^{17} to 10^{21} atoms. The boundaries between the various domains having different orientations are called **domain walls**. In an unmagnetized sample, the domains are randomly oriented so that the net magnetic moment is zero, as shown in Figure 30.28a. When the sample is placed in an external magnetic field, the magnetic moments of the atoms tend to align with the field, which results in a magnetized sample, as in Figure 30.28b. Observations show that domains initially oriented along the external field grow larger at the expense of the less favorably oriented domains. When the external field is removed, the sample may retain a net magnetization in the direction of the original field. At ordinary temperatures, thermal agitation is not sufficient to disrupt this preferred orientation of magnetic moments.

A typical experimental arrangement that is used to measure the magnetic properties of a ferromagnetic material consists of a torus made of the material wound with N turns of wire, as shown in Figure 30.29, where the windings are represented in black and are referred to as the *primary coil*. This apparatus is sometimes referred to as a **Rowland ring**. A *secondary coil* (the red wires in Fig. 30.29) connected to a galvanometer is used to measure the total magnetic flux through the torus. The magnetic field \mathbf{B} in the torus is measured by increasing the current in the toroid from zero to I . As the current changes, the magnetic flux through

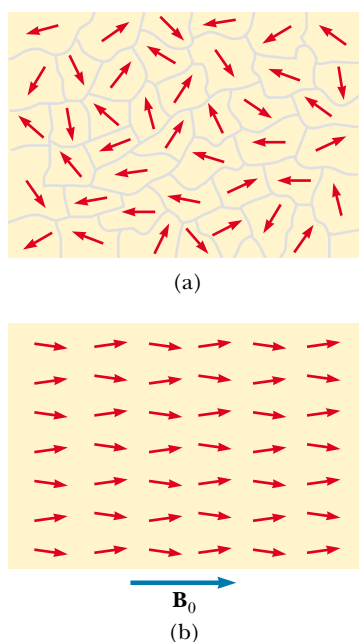


Figure 30.28 (a) Random orientation of atomic magnetic moments in an unmagnetized substance. (b) When an external field \mathbf{B}_0 is applied, the atomic magnetic moments tend to align with the field, giving the sample a net magnetization vector \mathbf{M} .

the secondary coil changes by an amount BA , where A is the cross-sectional area of the toroid. As we shall find in Chapter 31, because of this changing flux, an emf that is proportional to the rate of change in magnetic flux is induced in the secondary coil. If the galvanometer is properly calibrated, a value for \mathbf{B} corresponding to any value of the current in the primary coil can be obtained. The magnetic field \mathbf{B} is measured first in the absence of the torus and then with the torus in place. The magnetic properties of the torus material are then obtained from a comparison of the two measurements.

Now consider a torus made of unmagnetized iron. If the current in the primary coil is increased from zero to some value I , the magnitude of the magnetic field strength H increases linearly with I according to the expression $H = nI$. Furthermore, the magnitude of the total field B also increases with increasing current, as shown by the curve from point O to point a in Figure 30.30. At point O , the domains in the iron are randomly oriented, corresponding to $B_m = 0$. As the increasing current in the primary coil causes the external field \mathbf{B}_0 to increase, the domains become more aligned until all of them are nearly aligned at point a . At this point the iron core is approaching *saturation*, which is the condition in which all domains in the iron are aligned.

Next, suppose that the current is reduced to zero, and the external field is consequently eliminated. The B versus H curve, called a **magnetization curve**, now follows the path ab in Figure 30.30. Note that at point b , \mathbf{B} is not zero even though the external field is $\mathbf{B}_0 = 0$. The reason is that the iron is now magnetized due to the alignment of a large number of its domains (that is, $\mathbf{B} = \mathbf{B}_m$). At this point, the iron is said to have a *remanent magnetization*.

If the current in the primary coil is reversed so that the direction of the external magnetic field is reversed, the domains reorient until the sample is again unmagnetized at point c , where $B = 0$. An increase in the reverse current causes the iron to be magnetized in the opposite direction, approaching saturation at point d in Figure 30.30. A similar sequence of events occurs as the current is reduced to zero and then increased in the original (positive) direction. In this case the magnetization curve follows the path def . If the current is increased sufficiently, the magnetization curve returns to point a , where the sample again has its maximum magnetization.

The effect just described, called **magnetic hysteresis**, shows that the magnetization of a ferromagnetic substance depends on the history of the substance as well as on the magnitude of the applied field. (The word *hysteresis* means “lagging behind.”) It is often said that a ferromagnetic substance has a “memory” because it remains magnetized after the external field is removed. The closed loop in Figure 30.30 is referred to as a *hysteresis loop*. Its shape and size depend on the proper-




Figure 30.30 Magnetization curve for a ferromagnetic material.

QuickLab

You've probably done this experiment before. Magnetize a nail by repeatedly dragging it across a bar magnet. Test the strength of the nail's magnetic field by picking up some paper clips. Now hit the nail several times with a hammer, and again test the strength of its magnetism. Explain what happens in terms of domains in the steel of the nail.

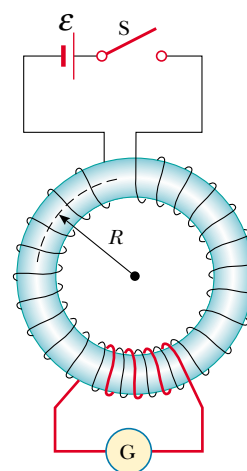


Figure 30.29 A toroidal winding arrangement used to measure the magnetic properties of a material. The torus is made of the material under study, and the circuit containing the galvanometer measures the magnetic flux.

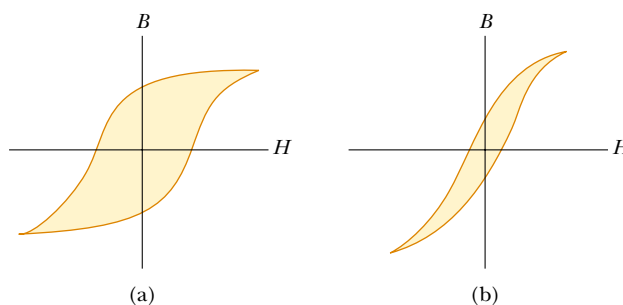


Figure 30.31 Hysteresis loops for (a) a hard ferromagnetic material and (b) a soft ferromagnetic material.

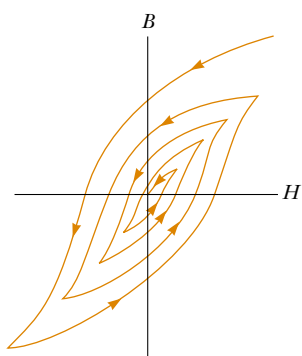


Figure 30.32 Demagnetizing a ferromagnetic material by carrying it through successive hysteresis loops.

ties of the ferromagnetic substance and on the strength of the maximum applied field. The hysteresis loop for “hard” ferromagnetic materials is characteristically wide like the one shown in Figure 30.31a, corresponding to a large remanent magnetization. Such materials cannot be easily demagnetized by an external field. “Soft” ferromagnetic materials, such as iron, have a very narrow hysteresis loop and a small remanent magnetization (Fig. 30.31b.) Such materials are easily magnetized and demagnetized. An ideal soft ferromagnet would exhibit no hysteresis and hence would have no remanent magnetization. A ferromagnetic substance can be demagnetized by being carried through successive hysteresis loops, due to a decreasing applied magnetic field, as shown in Figure 30.32.

Quick Quiz 30.8

Which material would make a better permanent magnet, one whose hysteresis loop looks like Figure 30.31a or one whose loop looks like Figure 30.31b?

The magnetization curve is useful for another reason: **The area enclosed by the magnetization curve represents the work required to take the material through the hysteresis cycle.** The energy acquired by the material in the magnetization process originates from the source of the external field—that is, the emf in the circuit of the toroidal coil. When the magnetization cycle is repeated, dissipative processes within the material due to realignment of the domains result in a transformation of magnetic energy into internal energy, which is evidenced by an increase in the temperature of the substance. For this reason, devices subjected to alternating fields (such as ac adapters for cell phones, power tools, and so on) use cores made of soft ferromagnetic substances, which have narrow hysteresis loops and correspondingly little energy loss per cycle.



Magnetic computer disks store information by alternating the direction of \mathbf{B} for portions of a thin layer of ferromagnetic material. Floppy disks have the layer on a circular sheet of plastic. Hard disks have several rigid platters with magnetic coatings on each side. Audio tapes and videotapes work the same way as floppy disks except that the ferromagnetic material is on a very long strip of plastic. Tiny coils of wire in a recording head are placed close to the magnetic material (which is moving rapidly past the head). Varying the current through the coils creates a magnetic field that magnetizes the recording material. To retrieve the information, the magnetized material is moved past a playback coil. The changing magnetism of the material induces a current in the coil, as we shall discuss in Chapter 31. This current is then amplified by audio or video equipment, or it is processed by computer circuitry.

Paramagnetism

Paramagnetic substances have a small but positive magnetic susceptibility ($0 < \chi \ll 1$) resulting from the presence of atoms (or ions) that have permanent magnetic moments. These moments interact only weakly with each other and are randomly oriented in the absence of an external magnetic field. When a paramagnetic substance is placed in an external magnetic field, its atomic moments tend to line up with the field. However, this alignment process must compete with thermal motion, which tends to randomize the magnetic moment orientations.

Pierre Curie (1859–1906) and others since him have found experimentally that, under a wide range of conditions, the magnetization of a paramagnetic substance is proportional to the applied magnetic field and inversely proportional to the absolute temperature:

$$M = C \frac{B_0}{T} \quad (30.35)$$

This relationship is known as **Curie's law** after its discoverer, and the constant C is called **Curie's constant**. The law shows that when $B_0 = 0$, the magnetization is zero, corresponding to a random orientation of magnetic moments. As the ratio of magnetic field to temperature becomes great, the magnetization approaches its saturation value, corresponding to a complete alignment of its moments, and Equation 30.35 is no longer valid.

When the temperature of a ferromagnetic substance reaches or exceeds a critical temperature called the **Curie temperature**, the substance loses its residual magnetization and becomes paramagnetic (Fig. 30.33). Below the Curie temperature, the magnetic moments are aligned and the substance is ferromagnetic. Above the Curie temperature, the thermal agitation is great enough to cause a random orientation of the moments, and the substance becomes paramagnetic. Curie temperatures for several ferromagnetic substances are given in Table 30.3.

Diamagnetism

When an external magnetic field is applied to a diamagnetic substance, a weak magnetic moment is induced in the direction opposite the applied field. This causes diamagnetic substances to be weakly repelled by a magnet. Although diamagnetism is present in all matter, its effects are much smaller than those of paramagnetism or ferromagnetism, and are evident only when those other effects do not exist.

We can attain some understanding of diamagnetism by considering a classical model of two atomic electrons orbiting the nucleus in opposite directions but with the same speed. The electrons remain in their circular orbits because of the attractive electrostatic force exerted by the positively charged nucleus. Because the magnetic moments of the two electrons are equal in magnitude and opposite in direction, they cancel each other, and the magnetic moment of the atom is zero. When an external magnetic field is applied, the electrons experience an additional force $q\mathbf{v} \times \mathbf{B}$. This added force combines with the electrostatic force to increase the orbital speed of the electron whose magnetic moment is antiparallel to the field and to decrease the speed of the electron whose magnetic moment is parallel to the field. As a result, the two magnetic moments of the electrons no longer cancel, and the substance acquires a net magnetic moment that is opposite the applied field.




Figure 30.33 Magnetization versus absolute temperature for a ferromagnetic substance. The magnetic moments are aligned below the Curie temperature T_{Curie} , where the substance is ferromagnetic. The substance becomes paramagnetic (magnetic moments unaligned) above T_{Curie} .

TABLE 30.3
Curie Temperatures for
Several Ferromagnetic
Substances

Substance	T_{Curie} (K)
Iron	1 043
Cobalt	1 394
Nickel	631
Gadolinium	317
Fe_2O_3	893

web

Visit www.exploratorium.edu/snacks/diamagnetism_www/index.html for an experiment showing that grapes are repelled by magnets!



Figure 30.34 A small permanent magnet levitated above a disk of the superconductor $\text{YBa}_2\text{Cu}_3\text{O}_7$ cooled to liquid nitrogen temperature (77 K).

web

For a more detailed description of the unusual properties of superconductors, visit www.saunderscollege.com/physics/

As you recall from Chapter 27, a superconductor is a substance in which the electrical resistance is zero below some critical temperature. Certain types of superconductors also exhibit perfect diamagnetism in the superconducting state. As a result, an applied magnetic field is expelled by the superconductor so that the field is zero in its interior. This phenomenon of flux expulsion is known as the **Meissner effect**. If a permanent magnet is brought near a superconductor, the two objects repel each other. This is illustrated in Figure 30.34, which shows a small permanent magnet levitated above a superconductor maintained at 77 K.

EXAMPLE 30.11 Saturation Magnetization

Estimate the saturation magnetization in a long cylinder of iron, assuming one unpaired electron spin per atom.

Solution The saturation magnetization is obtained when all the magnetic moments in the sample are aligned. If the sample contains n atoms per unit volume, then the saturation magnetization M_s has the value

$$M_s = n\mu$$

where μ is the magnetic moment per atom. Because the molar mass of iron is 55 g/mol and its density is 7.9 g/cm³, the value of n for iron is 8.6×10^{28} atoms/m³. Assuming that

each atom contributes one Bohr magneton (due to one unpaired spin) to the magnetic moment, we obtain

$$\begin{aligned} M_s &= \left(8.6 \times 10^{28} \frac{\text{atoms}}{\text{m}^3} \right) \left(9.27 \times 10^{-24} \frac{\text{A} \cdot \text{m}^2}{\text{atom}} \right) \\ &= 8.0 \times 10^5 \text{ A/m} \end{aligned}$$

This is about one-half the experimentally determined saturation magnetization for iron, which indicates that actually two unpaired electron spins are present per atom.

Optional Section

30.9 THE MAGNETIC FIELD OF THE EARTH

When we speak of a compass magnet having a north pole and a south pole, we should say more properly that it has a “north-seeking” pole and a “south-seeking” pole. By this we mean that one pole of the magnet seeks, or points to, the north geographic pole of the Earth. Because the north pole of a magnet is attracted toward the north geographic pole of the Earth, we conclude that **the Earth’s south magnetic pole is located near the north geographic pole, and the Earth’s north magnetic pole is located near the south geographic pole**. In fact, the configuration of the Earth’s magnetic field, pictured in Figure 30.35, is very much like the one that would be achieved by burying a gigantic bar magnet deep in the interior of the Earth.

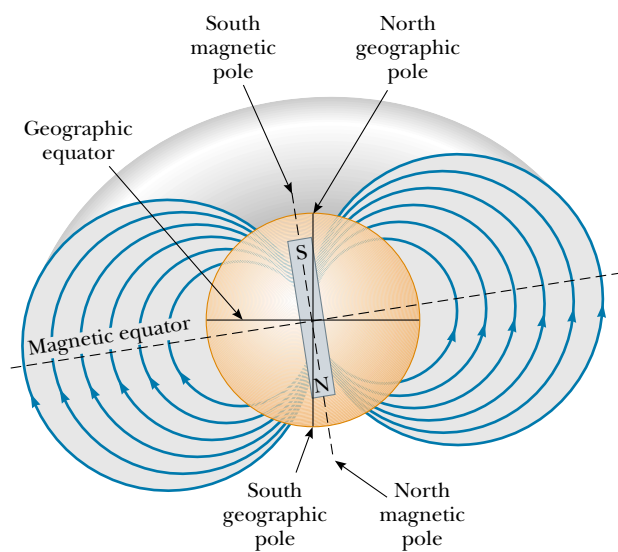


Figure 30.35 The Earth's magnetic field lines. Note that a south magnetic pole is near the north geographic pole, and a north magnetic pole is near the south geographic pole.

If a compass needle is suspended in bearings that allow it to rotate in the vertical plane as well as in the horizontal plane, the needle is horizontal with respect to the Earth's surface only near the equator. As the compass is moved northward, the needle rotates so that it points more and more toward the surface of the Earth. Finally, at a point near Hudson Bay in Canada, the north pole of the needle points directly downward. This site, first found in 1832, is considered to be the location of the south magnetic pole of the Earth. It is approximately 1 300 mi from the Earth's geographic North Pole, and its exact position varies slowly with time. Similarly, the north magnetic pole of the Earth is about 1 200 mi away from the Earth's geographic South Pole.


Because of this distance between the north geographic and south magnetic poles, it is only approximately correct to say that a compass needle points north. The difference between true north, defined as the geographic North Pole, and north indicated by a compass varies from point to point on the Earth, and the difference is referred to as *magnetic declination*. For example, along a line through Florida and the Great Lakes, a compass indicates true north, whereas in Washington state, it aligns 25° east of true north.



The north end of a compass needle points to the *south* magnetic pole of the Earth. The “north” compass direction varies from true geographic north depending on the magnetic declination at that point on the Earth's surface.

QuickLab

A gold ring is very weakly repelled by a magnet. To see this, suspend a 14- or 18-karat gold ring on a long loop of thread, as shown in (a). Gently tap the ring and estimate its period of oscillation. Now bring the ring to rest, letting it hang for a few moments so that you can verify that it is not moving. Quickly bring a very strong magnet to within a few millimeters of the ring, taking care not to bump it, as shown in (b). Now pull the magnet away. Repeat this action many times, matching the oscillation period you estimated earlier. This is just like pushing a child on a swing. A small force applied at the resonant frequency results in a large-amplitude oscillation. If you have a platinum ring, you will be able to see a similar effect except that platinum is weakly attracted to a magnet because it is paramagnetic.

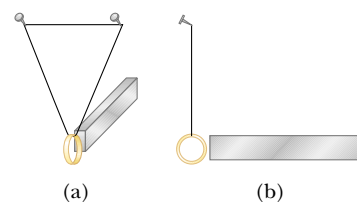

Quick Quiz 30.9

If we wanted to cancel the Earth's magnetic field by running an enormous current loop around the equator, which way would the current have to flow: east to west or west to east?

Although the magnetic field pattern of the Earth is similar to the one that would be set up by a bar magnet deep within the Earth, it is easy to understand why the source of the Earth's magnetic field cannot be large masses of permanently magnetized material. The Earth does have large deposits of iron ore deep beneath its surface, but the high temperatures in the Earth's core prevent the iron from retaining any permanent magnetization. Scientists consider it more likely that the true source of the Earth's magnetic field is charge-carrying convection currents in the Earth's core. Charged ions or electrons circulating in the liquid interior could produce a magnetic field just as a current loop does. There is also strong evidence that the magnitude of a planet's magnetic field is related to the planet's rate of rotation. For example, Jupiter rotates faster than the Earth, and space probes indicate that Jupiter's magnetic field is stronger than ours. Venus, on the other hand, rotates more slowly than the Earth, and its magnetic field is found to be weaker. Investigation into the cause of the Earth's magnetism is ongoing.

There is an interesting sidelight concerning the Earth's magnetic field. It has been found that the direction of the field has been reversed several times during the last million years. Evidence for this is provided by basalt, a type of rock that contains iron and that forms from material spewed forth by volcanic activity on the ocean floor. As the lava cools, it solidifies and retains a picture of the Earth's magnetic field direction. The rocks are dated by other means to provide a timeline for these periodic reversals of the magnetic field.

SUMMARY

The **Biot–Savart law** says that the magnetic field $d\mathbf{B}$ at a point P due to a length element $d\mathbf{s}$ that carries a steady current I is

$$d\mathbf{B} = \frac{\mu_0}{4\pi} \frac{I d\mathbf{s} \times \hat{\mathbf{r}}}{r^2} \quad (30.1)$$

where $\mu_0 = 4\pi \times 10^{-7} \text{ T}\cdot\text{m/A}$ is the **permeability of free space**, r is the distance from the element to the point P , and $\hat{\mathbf{r}}$ is a unit vector pointing from $d\mathbf{s}$ to point P . We find the total field at P by integrating this expression over the entire current distribution.

The magnetic field at a distance a from a long, straight wire carrying an electric current I is

$$B = \frac{\mu_0 I}{2\pi a} \quad (30.5)$$

The field lines are circles concentric with the wire.

The magnetic force per unit length between two parallel wires separated by a distance a and carrying currents I_1 and I_2 has a magnitude

$$\frac{F_B}{\ell} = \frac{\mu_0 I_1 I_2}{2\pi a} \quad (30.12)$$

The force is attractive if the currents are in the same direction and repulsive if they are in opposite directions.

Ampère's law says that the line integral of $\mathbf{B} \cdot d\mathbf{s}$ around any closed path equals $\mu_0 I$, where I is the total steady current passing through any surface bounded by the closed path:

$$\oint \mathbf{B} \cdot d\mathbf{s} = \mu_0 I \quad (30.13)$$

Using Ampère's law, one finds that the fields inside a toroid and solenoid are

$$B = \frac{\mu_0 N I}{2\pi r} \quad (\text{toroid}) \quad (30.16)$$

$$B = \mu_0 \frac{N}{\ell} I = \mu_0 n I \quad (\text{solenoid}) \quad (30.17)$$

where N is the total number of turns.

The **magnetic flux** Φ_B through a surface is defined by the surface integral

$$\Phi_B \equiv \int \mathbf{B} \cdot d\mathbf{A} \quad (30.18)$$

Gauss's law of magnetism states that the net magnetic flux through any closed surface is zero.

The general form of Ampère's law, which is also called the **Ampère-Maxwell law**, is

$$\oint \mathbf{B} \cdot d\mathbf{s} = \mu_0 I + \mu_0 \epsilon_0 \frac{d\Phi_E}{dt} \quad (30.22)$$

This law describes the fact that magnetic fields are produced both by conduction currents and by changing electric fields.

QUESTIONS

1. Is the magnetic field created by a current loop uniform? Explain.
2. A current in a conductor produces a magnetic field that can be calculated using the Biot–Savart law. Because current is defined as the rate of flow of charge, what can you conclude about the magnetic field produced by stationary charges? What about that produced by moving charges?
3. Two parallel wires carry currents in opposite directions. Describe the nature of the magnetic field created by the two wires at points (a) between the wires and (b) outside the wires, in a plane containing them.
4. Explain why two parallel wires carrying currents in opposite directions repel each other.
5. When an electric circuit is being assembled, a common practice is to twist together two wires carrying equal currents in opposite directions. Why does this technique reduce stray magnetic fields?
6. Is Ampère's law valid for all closed paths surrounding a conductor? Why is it not useful for calculating \mathbf{B} for all such paths?
7. Compare Ampère's law with the Biot–Savart law. Which is more generally useful for calculating \mathbf{B} for a current-carrying conductor?
8. Is the magnetic field inside a toroid uniform? Explain.
9. Describe the similarities between Ampère's law in magnetism and Gauss's law in electrostatics.
10. A hollow copper tube carries a current along its length. Why does $\mathbf{B} = 0$ inside the tube? Is \mathbf{B} nonzero outside the tube?
11. Why is \mathbf{B} nonzero outside a solenoid? Why does $\mathbf{B} = 0$ outside a toroid? (Remember that the lines of \mathbf{B} must form closed paths.)
12. Describe the change in the magnetic field in the interior of a solenoid carrying a steady current I (a) if the length of the solenoid is doubled but the number of turns remains the same and (b) if the number of turns is doubled but the length remains the same.
13. A flat conducting loop is positioned in a uniform magnetic field directed along the x axis. For what orientation of the loop is the flux through it a maximum? A minimum?
14. What new concept does Maxwell's general form of Ampère's law include?
15. Many loops of wire are wrapped around a nail and then connected to a battery. Identify the source of \mathbf{M} , of \mathbf{H} , and of \mathbf{B} .

16. A magnet attracts a piece of iron. The iron can then attract another piece of iron. On the basis of domain alignment, explain what happens in each piece of iron.
17. You are stranded on a planet that does not have a magnetic field, with no test equipment. You have two bars of iron in your possession; one is magnetized, and one is not. How can you determine which is which?
18. Why does hitting a magnet with a hammer cause the magnetism to be reduced?
19. Is a nail attracted to either pole of a magnet? Explain what is happening inside the nail when it is placed near the magnet.
20. A Hindu ruler once suggested that he be entombed in a magnetic coffin with the polarity arranged so that he would be forever suspended between heaven and Earth. Is such magnetic levitation possible? Discuss.
21. Why does $\mathbf{M} = 0$ in a vacuum? What is the relationship between \mathbf{B} and \mathbf{H} in a vacuum?
22. Explain why some atoms have permanent magnetic moments and others do not.
23. What factors contribute to the total magnetic moment of an atom?
24. Why is the magnetic susceptibility of a diamagnetic substance negative?
25. Why can the effect of diamagnetism be neglected in a paramagnetic substance?
26. Explain the significance of the Curie temperature for a ferromagnetic substance.
27. Discuss the differences among ferromagnetic, paramagnetic, and diamagnetic substances.
28. What is the difference between hard and soft ferromagnetic materials?
29. Should the surface of a computer disk be made from a hard or a soft ferromagnetic substance?
30. Explain why it is desirable to use hard ferromagnetic materials to make permanent magnets.
31. Would you expect the tape from a tape recorder to be attracted to a magnet? (Try it, but not with a recording you wish to save.)
32. Given only a strong magnet and a screwdriver, how would you first magnetize and then demagnetize the screwdriver?
33. Figure Q30.33 shows two permanent magnets, each having a hole through its center. Note that the upper magnet is levitated above the lower one. (a) How does this occur? (b) What purpose does the pencil serve? (c) What can you say about the poles of the magnets on the basis of this observation? (d) What do you suppose would happen if the upper magnet were inverted?



Figure Q30.33 Magnetic levitation using two ceramic magnets.

PROBLEMS

1, 2, 3 = straightforward, intermediate, challenging ☐ = full solution available in the *Student Solutions Manual and Study Guide*

WEB = solution posted at <http://www.saunderscollege.com/physics/> = Computer useful in solving problem = Interactive Physics

= paired numerical/symbolic problems

Section 30.1 The Biot–Savart Law

1. In Niels Bohr's 1913 model of the hydrogen atom, an electron circles the proton at a distance of 5.29×10^{-11} m with a speed of 2.19×10^6 m/s. Compute the magnitude of the magnetic field that this motion produces at the location of the proton.
2. A current path shaped as shown in Figure P30.2 produces a magnetic field at P , the center of the arc. If the arc subtends an angle of 30.0° and the radius of the arc is 0.600 m, what are the magnitude and direction of the field produced at P if the current is 3.00 A?
3. (a) A conductor in the shape of a square of edge length $\ell = 0.400$ m carries a current $I = 10.0$ A (Fig. P30.3). Calculate the magnitude and direction of the magnetic




Figure P30.2

field at the center of the square. (b) If this conductor is formed into a single circular turn and carries the same current, what is the value of the magnetic field at the center?




Figure P30.3

4. Calculate the magnitude of the magnetic field at a point 100 cm from a long, thin conductor carrying a current of 1.00 A.
- WEB 5. Determine the magnetic field at a point P located a distance x from the corner of an infinitely long wire bent at a right angle, as shown in Figure P30.5. The wire carries a steady current I .

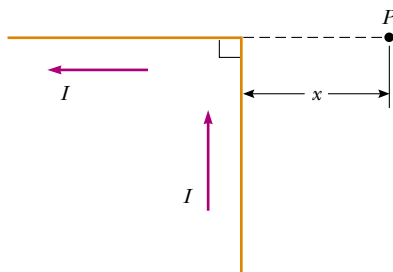


Figure P30.5

6. A wire carrying a current of 5.00 A is to be formed into a circular loop of one turn. If the required value of the magnetic field at the center of the loop is $10.0 \mu\text{T}$, what is the required radius?
7. A conductor consists of a circular loop of radius $R = 0.100 \text{ m}$ and two straight, long sections, as shown in Figure P30.7. The wire lies in the plane of the paper and carries a current of $I = 7.00 \text{ A}$. Determine the magnitude and direction of the magnetic field at the center of the loop.
8. A conductor consists of a circular loop of radius R and two straight, long sections, as shown in Figure P30.7. The wire lies in the plane of the paper and carries a current I . Determine the magnitude and direction of the magnetic field at the center of the loop.
9. The segment of wire in Figure P30.9 carries a current of $I = 5.00 \text{ A}$, where the radius of the circular arc is $R = 3.00 \text{ cm}$. Determine the magnitude and direction of the magnetic field at the origin.

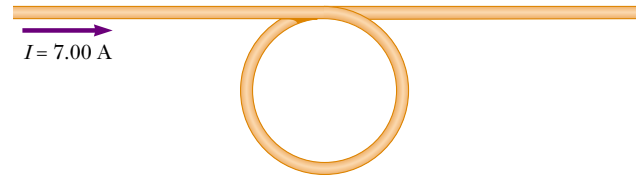


Figure P30.7 Problems 7 and 8.




Figure P30.9

10. Consider a flat, circular current loop of radius R carrying current I . Choose the x axis to be along the axis of the loop, with the origin at the center of the loop. Graph the ratio of the magnitude of the magnetic field at coordinate x to that at the origin, for $x = 0$ to $x = 5R$. It may be helpful to use a programmable calculator or a computer to solve this problem.
11. Consider the current-carrying loop shown in Figure P30.11, formed of radial lines and segments of circles whose centers are at point P . Find the magnitude and direction of \mathbf{B} at P .

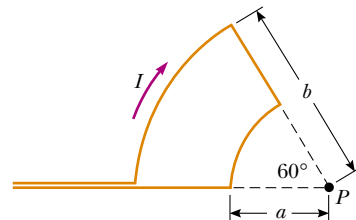


Figure P30.11

12. Determine the magnetic field (in terms of I , a , and d) at the origin due to the current loop shown in Figure P30.12.
13. The loop in Figure P30.13 carries a current I . Determine the magnetic field at point A in terms of I , R , and L .
14. Three long, parallel conductors carry currents of $I = 2.00 \text{ A}$. Figure P30.14 is an end view of the conductors, with each current coming out of the page. If $a = 1.00 \text{ cm}$, determine the magnitude and direction of the magnetic field at points A, B, and C.
15. Two long, parallel conductors carry currents $I_1 = 3.00 \text{ A}$ and $I_2 = 3.00 \text{ A}$, both directed into the page in

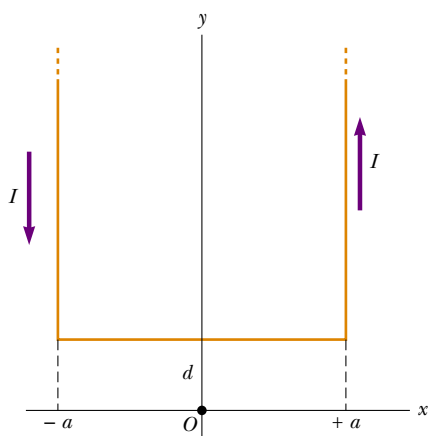


Figure P30.12




Figure P30.13

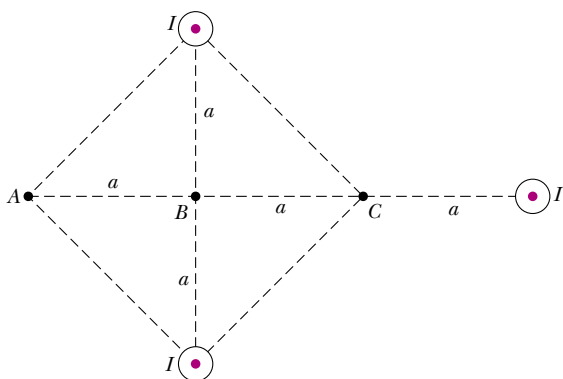


Figure P30.14




Figure P30.15

Figure P30.15. Determine the magnitude and direction of the resultant magnetic field at P .

Section 30.2 The Magnetic Force Between Two Parallel Conductors

16. Two long, parallel conductors separated by 10.0 cm carry currents in the same direction. The first wire carries current $I_1 = 5.00$ A, and the second carries $I_2 = 8.00$ A. (a) What is the magnitude of the magnetic field created by I_1 and acting on I_2 ? (b) What is the force per unit length exerted on I_2 by I_1 ? (c) What is the magnitude of the magnetic field created by I_2 at the location of I_1 ? (d) What is the force per unit length exerted by I_2 on I_1 ?

17. In Figure P30.17, the current in the long, straight wire is $I_1 = 5.00$ A, and the wire lies in the plane of the rectangular loop, which carries 10.0 A. The dimensions are $c = 0.100$ m, $a = 0.150$ m, and $\ell = 0.450$ m. Find the magnitude and direction of the net force exerted on the loop by the magnetic field created by the wire.

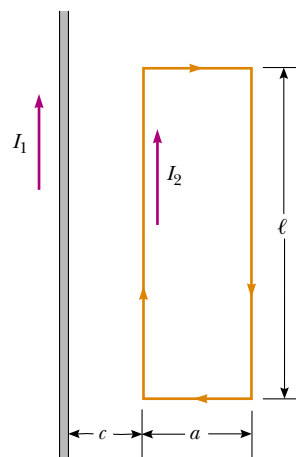


Figure P30.17

18. The unit of magnetic flux is named for Wilhelm Weber. The practical-size unit of magnetic field is named for Johann Karl Friedrich Gauss. Both were scientists at Göttingen, Germany. In addition to their individual accomplishments, they built a telegraph together in 1833. It consisted of a battery and switch that were positioned at one end of a transmission line 3 km long and operated an electromagnet at the other end. (Andre Ampère suggested electrical signaling in 1821; Samuel Morse built a telegraph line between Baltimore and Washington in 1844.) Suppose that Weber and Gauss's transmission line was as diagrammed in Figure P30.18. Two long, parallel wires, each having a mass per unit length of 40.0 g/m, are supported in a horizontal plane by strings 6.00 cm long. When both wires carry the same current I , the wires repel each other so that the angle θ

between the supporting strings is 16.0° . (a) Are the currents in the same direction or in opposite directions? (b) Find the magnitude of the current.




Figure P30.18

Section 30.3 Ampère's Law

- WEB 19.** Four long, parallel conductors carry equal currents of $I = 5.00$ A. Figure P30.19 is an end view of the conductors. The direction of the current is into the page at points A and B (indicated by the crosses) and out of the page at points C and D (indicated by the dots). Calculate the magnitude and direction of the magnetic field at point P, located at the center of the square with an edge length of 0.200 m.

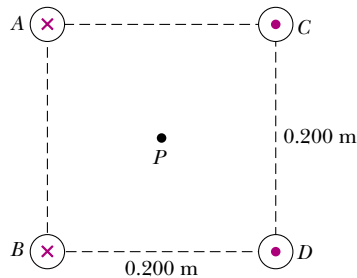


Figure P30.19

- 20.** A long, straight wire lies on a horizontal table and carries a current of $1.20 \mu\text{A}$. In a vacuum, a proton moves parallel to the wire (opposite the current) with a constant velocity of 2.30×10^4 m/s at a distance d above the wire. Determine the value of d . You may ignore the magnetic field due to the Earth.
- 21.** Figure P30.21 is a cross-sectional view of a coaxial cable. The center conductor is surrounded by a rubber layer, which is surrounded by an outer conductor, which is surrounded by another rubber layer. In a particular application, the current in the inner conductor is 1.00 A out of the page, and the current in the outer conductor is 3.00 A into the page. Determine the magnitude and direction of the magnetic field at points a and b .
- 22.** The magnetic field 40.0 cm away from a long, straight wire carrying current 2.00 A is $1.00 \mu\text{T}$. (a) At what distance is it $0.100 \mu\text{T}$? (b) At one instant, the two conductors in a long household extension cord carry equal

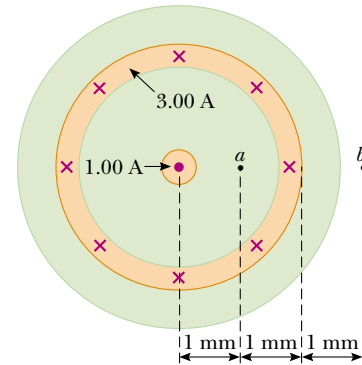


Figure P30.21

- 23.** The magnetic coils of a tokamak fusion reactor are in the shape of a toroid having an inner radius of 0.700 m and an outer radius of 1.30 m. If the toroid has 900 turns of large-diameter wire, each of which carries a current of 14.0 kA, find the magnitude of the magnetic field inside the toroid (a) along the inner radius and (b) along the outer radius.
- 24.** A cylindrical conductor of radius $R = 2.50$ cm carries a current of $I = 2.50$ A along its length; this current is uniformly distributed throughout the cross-section of the conductor. (a) Calculate the magnetic field midway along the radius of the wire (that is, at $r = R/2$). (b) Find the distance beyond the surface of the conductor at which the magnitude of the magnetic field has the same value as the magnitude of the field at $r = R/2$.
- WEB 25.** A packed bundle of 100 long, straight, insulated wires forms a cylinder of radius $R = 0.500$ cm. (a) If each wire carries 2.00 A, what are the magnitude and direction of the magnetic force per unit length acting on a wire located 0.200 cm from the center of the bundle? (b) Would a wire on the outer edge of the bundle experience a force greater or less than the value calculated in part (a)?
- 26.** Niobium metal becomes a superconductor when cooled below 9 K. If superconductivity is destroyed when the surface magnetic field exceeds 0.100 T, determine the maximum current a 2.00 -mm-diameter niobium wire can carry and remain superconducting, in the absence of any external magnetic field.
- 27.** A long, cylindrical conductor of radius R carries a current I , as shown in Figure P30.27. The current density J , however, is not uniform over the cross-section of the




Figure P30.27

conductor but is a function of the radius according to $J = br$, where b is a constant. Find an expression for the magnetic field B (a) at a distance $r_1 < R$ and (b) at a distance $r_2 > R$, measured from the axis.

28. In Figure P30.28, both currents are in the negative x direction. (a) Sketch the magnetic field pattern in the yz plane. (b) At what distance d along the z axis is the magnetic field a maximum?

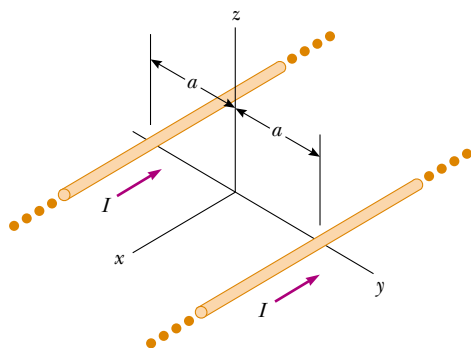


Figure P30.28

Section 30.4 The Magnetic Field of a Solenoid

- WEB 29. What current is required in the windings of a long solenoid that has 1 000 turns uniformly distributed over a length of 0.400 m, to produce at the center of the solenoid a magnetic field of magnitude 1.00×10^{-4} T?
30. A superconducting solenoid is meant to generate a magnetic field of 10.0 T. (a) If the solenoid winding has 2 000 turns/m, what current is required? (b) What force per unit length is exerted on the windings by this magnetic field?
31. A solenoid of radius $R = 5.00$ cm is made of a long piece of wire of radius $r = 2.00$ mm, length $\ell = 10.0$ m ($\ell \gg R$) and resistivity $\rho = 1.70 \times 10^{-8} \Omega \cdot \text{m}$. Find the magnetic field at the center of the solenoid if the wire is connected to a battery having an emf $\mathcal{E} = 20.0$ V.
32. A single-turn square loop of wire with an edge length of 2.00 cm carries a clockwise current of 0.200 A. The loop is inside a solenoid, with the plane of the loop perpendicular to the magnetic field of the solenoid. The solenoid has 30 turns/cm and carries a clockwise current of 15.0 A. Find the force on each side of the loop and the torque acting on the loop.

Section 30.5 Magnetic Flux

33. A cube of edge length $\ell = 2.50$ cm is positioned as shown in Figure P30.33. A uniform magnetic field given by $\mathbf{B} = (5.00\mathbf{i} + 4.00\mathbf{j} + 3.00\mathbf{k})$ T exists throughout the region. (a) Calculate the flux through the shaded face. (b) What is the total flux through the six faces?



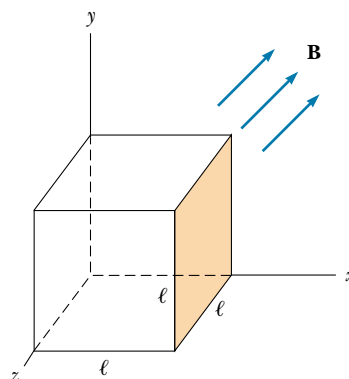


Figure P30.33

34. A solenoid 2.50 cm in diameter and 30.0 cm long has 300 turns and carries 12.0 A. (a) Calculate the flux through the surface of a disk of radius 5.00 cm that is positioned perpendicular to and centered on the axis of the solenoid, as in Figure P30.34a. (b) Figure P30.34b shows an enlarged end view of the same solenoid. Calculate the flux through the blue area, which is defined by an annulus that has an inner radius of 0.400 cm and outer radius of 0.800 cm.



(a)



(b)

Figure P30.34

35. Consider the hemispherical closed surface in Figure P30.35. If the hemisphere is in a uniform magnetic field that makes an angle θ with the vertical, calculate the magnetic flux (a) through the flat surface S_1 and (b) through the hemispherical surface S_2 .

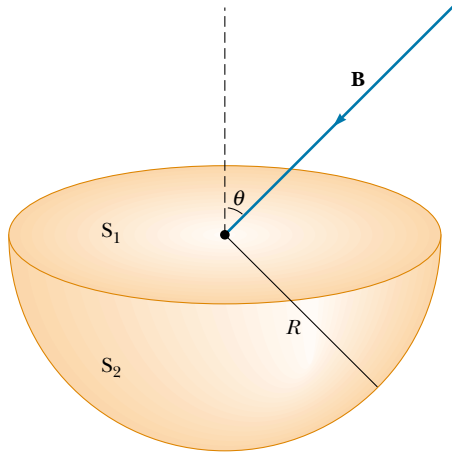


Figure P30.35

Section 30.6 Gauss's Law in Magnetism

Section 30.7 Displacement Current and the General Form of Ampère's Law

36. A 0.200-A current is charging a capacitor that has circular plates 10.0 cm in radius. If the plate separation is 4.00 mm, (a) what is the time rate of increase of electric field between the plates? (b) What is the magnetic field between the plates 5.00 cm from the center?
37. A 0.100-A current is charging a capacitor that has square plates 5.00 cm on each side. If the plate separation is 4.00 mm, find (a) the time rate of change of electric flux between the plates and (b) the displacement current between the plates.

(Optional)

Section 30.8 Magnetism in Matter

38. In Bohr's 1913 model of the hydrogen atom, the electron is in a circular orbit of radius 5.29×10^{-11} m, and its speed is 2.19×10^6 m/s. (a) What is the magnitude of the magnetic moment due to the electron's motion? (b) If the electron orbits counterclockwise in a horizontal circle, what is the direction of this magnetic moment vector?
39. A toroid with a mean radius of 20.0 cm and 630 turns (see Fig. 30.29) is filled with powdered steel whose magnetic susceptibility χ is 100. If the current in the windings is 3.00 A, find B (assumed uniform) inside the toroid.
40. A magnetic field of 1.30 T is to be set up in an iron-core toroid. The toroid has a mean radius of 10.0 cm and magnetic permeability of $5\,000\mu_0$. What current is re-

quired if there are 470 turns of wire in the winding? The thickness of the iron ring is small compared to 10 cm, so the field in the material is nearly uniform.

41. A coil of 500 turns is wound on an iron ring ($\mu_m = 750\mu_0$) with a 20.0-cm mean radius and an 8.00-cm^2 cross-sectional area. Calculate the magnetic flux Φ_B in this Rowland ring when the current in the coil is 0.500 A.
42. A uniform ring with a radius of 2.00 cm and a total charge of $6.00\ \mu\text{C}$ rotates with a constant angular speed of 4.00 rad/s around an axis perpendicular to the plane of the ring and passing through its center. What is the magnetic moment of the rotating ring?
43. Calculate the magnetic field strength H of a magnetized substance in which the magnetization is 880 kA/m and the magnetic field has a magnitude of 4.40 T.
44. At saturation, the alignment of spins in iron can contribute as much as 2.00 T to the total magnetic field B . If each electron contributes a magnetic moment of $9.27 \times 10^{-24}\ \text{A}\cdot\text{m}^2$ (one Bohr magneton), how many electrons per atom contribute to the saturated field of iron? (Hint: Iron contains 8.50×10^{28} atoms/ m^3 .)
45. (a) Show that Curie's law can be stated in the following way: The magnetic susceptibility of a paramagnetic substance is inversely proportional to the absolute temperature, according to $\chi = C\mu_0/T$, where C is Curie's constant. (b) Evaluate Curie's constant for chromium.

(Optional)

Section 30.9 The Magnetic Field of the Earth

46. A circular coil of 5 turns and a diameter of 30.0 cm is oriented in a vertical plane with its axis perpendicular to the horizontal component of the Earth's magnetic field. A horizontal compass placed at the center of the coil is made to deflect 45.0° from magnetic north by a current of 0.600 A in the coil. (a) What is the horizontal component of the Earth's magnetic field? (b) The current in the coil is switched off. A "dip needle" is a magnetic compass mounted so that it can rotate in a vertical north-south plane. At this location a dip needle makes an angle of 13.0° from the vertical. What is the total magnitude of the Earth's magnetic field at this location?
47. The magnetic moment of the Earth is approximately $8.00 \times 10^{22}\ \text{A}\cdot\text{m}^2$. (a) If this were caused by the complete magnetization of a huge iron deposit, how many unpaired electrons would this correspond to? (b) At two unpaired electrons per iron atom, how many kilograms of iron would this correspond to? (Iron has a density of $7\,900\ \text{kg}/\text{m}^3$ and approximately 8.50×10^{28} atoms/ m^3 .)

ADDITIONAL PROBLEMS

48. A lightning bolt may carry a current of 1.00×10^4 A for a short period of time. What is the resultant magnetic

field 100 m from the bolt? Suppose that the bolt extends far above and below the point of observation.

49. The magnitude of the Earth's magnetic field at either pole is approximately 7.00×10^{-5} T. Suppose that the field fades away, before its next reversal. Scouts, sailors, and wire merchants around the world join together in a program to replace the field. One plan is to use a current loop around the equator, without relying on magnetization of any materials inside the Earth. Determine the current that would generate such a field if this plan were carried out. (Take the radius of the Earth as $R_E = 6.37 \times 10^6$ m.)
50. Two parallel conductors carry current in opposite directions, as shown in Figure P30.50. One conductor carries a current of 10.0 A. Point A is at the midpoint between the wires, and point C is a distance $d/2$ to the right of the 10.0-A current. If $d = 18.0$ cm and I is adjusted so that the magnetic field at C is zero, find (a) the value of the current I and (b) the value of the magnetic field at A.

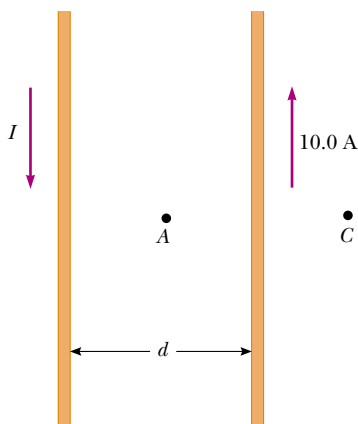


Figure P30.50

51. Suppose you install a compass on the center of the dashboard of a car. Compute an order-of-magnitude estimate for the magnetic field that is produced at this location by the current when you switch on the headlights. How does your estimate compare with the Earth's magnetic field? You may suppose the dashboard is made mostly of plastic.
52. Imagine a long, cylindrical wire of radius R that has a current density $J(r) = J_0(1 - r^2/R^2)$ for $r \leq R$ and $J(r) = 0$ for $r > R$, where r is the distance from the axis of the wire. (a) Find the resulting magnetic field inside ($r \leq R$) and outside ($r > R$) the wire. (b) Plot the magnitude of the magnetic field as a function of r . (c) Find the location where the magnitude of the magnetic field is a maximum, and the value of that maximum field.
53. A very long, thin strip of metal of width w carries a current I along its length, as shown in Figure P30.53. Find the magnetic field at point P in the diagram. Point P is

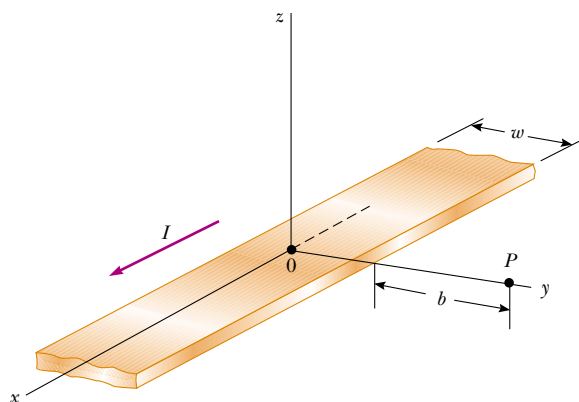


Figure P30.53

in the plane of the strip at a distance b away from the strip.

54. For a research project, a student needs a solenoid that produces an interior magnetic field of 0.030 0 T. She decides to use a current of 1.00 A and a wire 0.500 mm in diameter. She winds the solenoid in layers on an insulating form 1.00 cm in diameter and 10.0 cm long. Determine the number of layers of wire she needs and the total length of the wire.

WEB 55. A nonconducting ring with a radius of 10.0 cm is uniformly charged with a total positive charge of $10.0 \mu\text{C}$. The ring rotates at a constant angular speed of 20.0 rad/s about an axis through its center, perpendicular to the plane of the ring. What is the magnitude of the magnetic field on the axis of the ring, 5.00 cm from its center?

56. A nonconducting ring of radius R is uniformly charged with a total positive charge q . The ring rotates at a constant angular speed ω about an axis through its center, perpendicular to the plane of the ring. What is the magnitude of the magnetic field on the axis of the ring a distance $R/2$ from its center?

57. Two circular coils of radius R are each perpendicular to a common axis. The coil centers are a distance R apart, and a steady current I flows in the same direction around each coil, as shown in Figure P30.57. (a) Show that the magnetic field on the axis at a distance x from the center of one coil is

$$B = \frac{\mu_0 I R^2}{2} \left[\frac{1}{(R^2 + x^2)^{3/2}} + \frac{1}{(2R^2 + x^2 - 2Rx)^{3/2}} \right]$$

(b) Show that dB/dx and d^2B/dx^2 are both zero at a point midway between the coils. This means that the magnetic field in the region midway between the coils is uniform. Coils in this configuration are called **Helmholtz coils**.

58. Two identical, flat, circular coils of wire each have 100 turns and a radius of 0.500 m. The coils are arranged as




Figure P30.57 Problems 57 and 58.

a set of Helmholtz coils (see Fig. P30.57), parallel and with a separation of 0.500 m. If each coil carries a current of 10.0 A, determine the magnitude of the magnetic field at a point on the common axis of the coils and halfway between them.

59. Two circular loops are parallel, coaxial, and almost in contact, 1.00 mm apart (Fig. P30.59). Each loop is 10.0 cm in radius. The top loop carries a clockwise current of 140 A. The bottom loop carries a counterclockwise current of 140 A. (a) Calculate the magnetic force that the bottom loop exerts on the top loop. (b) The upper loop has a mass of 0.021 0 kg. Calculate its acceleration, assuming that the only forces acting on it are the force in part (a) and its weight. (*Hint:* Think about how one loop looks to a bug perched on the other loop.)




Figure P30.59

60. What objects experience a force in an electric field? Chapter 23 gives the answer: any electric charge, stationary or moving, other than the charge that created the field. What creates an electric field? Any electric charge, stationary or moving, also as discussed in Chapter 23. What objects experience a force in a magnetic field? An electric current or a moving electric charge other than the current or charge that created the field, as discovered in Chapter 29. What creates a magnetic field? An electric current, as you found in Section 30.11, or a moving electric charge, as in this problem. (a) To display how a moving charge creates a magnetic field, consider a charge q moving with velocity \mathbf{v} . Define the unit vector $\hat{\mathbf{r}} = \mathbf{r}/r$ to point from the charge to some location. Show that the magnetic field at that location is

$$\mathbf{B} = \frac{\mu_0}{4\pi} \frac{q\mathbf{v} \times \hat{\mathbf{r}}}{r^2}$$

- (b) Find the magnitude of the magnetic field 1.00 mm

to the side of a proton moving at 2.00×10^7 m/s.

(c) Find the magnetic force on a second proton at this point, moving with the same speed in the opposite direction. (d) Find the electric force on the second proton.

61. Rail guns have been suggested for launching projectiles into space without chemical rockets, and for ground-to-air antimissile weapons of war. A tabletop model rail gun (Fig. P30.61) consists of two long parallel horizontal rails 3.50 cm apart, bridged by a bar BD of mass 3.00 g. The bar is originally at rest at the midpoint of the rails and is free to slide without friction. When the switch is closed, electric current is very quickly established in the circuit $ABCDEA$. The rails and bar have low electrical resistance, and the current is limited to a constant 24.0 A by the power supply. (a) Find the magnitude of the magnetic field 1.75 cm from a single very long, straight wire carrying current 24.0 A. (b) Find the vector magnetic field at point C in the diagram, the midpoint of the bar, immediately after the switch is closed. (*Hint:* Consider what conclusions you can draw from the Biot–Savart law.) (c) At other points along the bar BD , the field is in the same direction as at point C , but greater in magnitude. Assume that the average effective magnetic field along BD is five times larger than the field at C . With this assumption, find the vector force on the bar. (d) Find the vector acceleration with which the bar starts to move. (e) Does the bar move with constant acceleration? (f) Find the velocity of the bar after it has traveled 130 cm to the end of the rails.

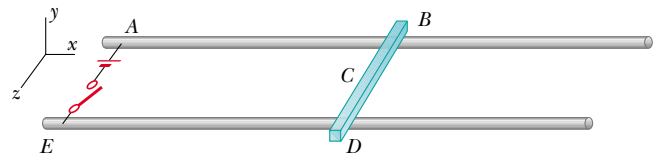


Figure P30.61

62. Two long, parallel conductors carry currents in the same direction, as shown in Figure P30.62. Conductor A carries a current of 150 A and is held firmly in position. Conductor B carries a current I_B and is allowed to slide freely up and down (parallel to A) between a set of nonconducting guides. If the mass per unit length of conductor B is 0.100 g/cm, what value of current I_B will result in equilibrium when the distance between the two conductors is 2.50 cm?
63. Charge is sprayed onto a large nonconducting belt above the left-hand roller in Figure P30.63. The belt carries the charge, with a uniform surface charge density σ , as it moves with a speed v between the rollers as shown. The charge is removed by a wiper at the right-hand roller. Consider a point just above the surface of the moving belt. (a) Find an expression for the magni-

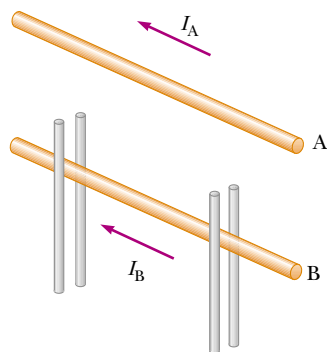


Figure P30.62

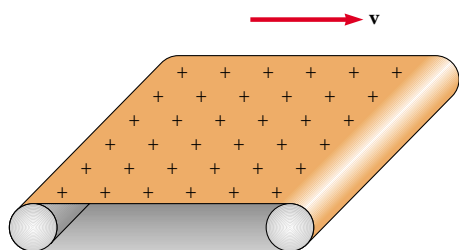


Figure P30.63

tude of the magnetic field \mathbf{B} at this point. (b) If the belt is positively charged, what is the direction of \mathbf{B} ? (Note that the belt may be considered as an infinite sheet.)

64. A particular paramagnetic substance achieves 10.0% of its saturation magnetization when placed in a magnetic field of 5.00 T at a temperature of 4.00 K. The density of magnetic atoms in the sample is 8.00×10^{27} atoms/m³, and the magnetic moment per atom is 5.00 Bohr magnetons. Calculate the Curie constant for this substance.
65. A bar magnet (mass = 39.4 g, magnetic moment = 7.65 J/T, length = 10.0 cm) is connected to the ceiling by a string. A uniform external magnetic field is applied horizontally, as shown in Figure P30.65. The magnet is in equilibrium, making an angle θ with the horizontal. If $\theta = 5.00^\circ$, determine the magnitude of the applied magnetic field.




Figure P30.65

66. An infinitely long, straight wire carrying a current I_1 is partially surrounded by a loop, as shown in Figure P30.66. The loop has a length L and a radius R and carries a current I_2 . The axis of the loop coincides with the wire. Calculate the force exerted on the loop.




Figure P30.66

67. A wire is bent into the shape shown in Figure P30.67a, and the magnetic field is measured at P_1 when the current in the wire is I . The same wire is then formed into the shape shown in Figure P30.67b, and the magnetic field is measured at point P_2 when the current is again I . If the total length of wire is the same in each case, what is the ratio of B_1/B_2 ?

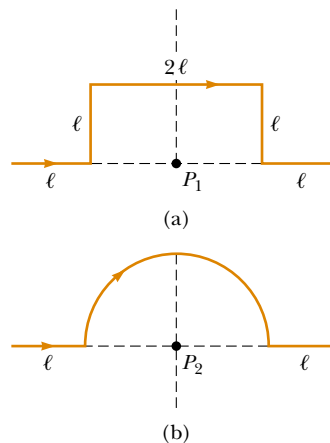


Figure P30.67

68. Measurements of the magnetic field of a large tornado were made at the Geophysical Observatory in Tulsa, Oklahoma, in 1962. If the tornado's field was $B = 15.0$ nT pointing north when the tornado was 9.00 km east of the observatory, what current was carried up or down the funnel of the tornado, modeled as a long straight wire?

69. A wire is formed into a square of edge length L (Fig. P30.69). Show that when the current in the loop is I , the magnetic field at point P , a distance x from the center of the square along its axis, is

$$B = \frac{\mu_0 I L^2}{2\pi(x^2 + L^2/4)\sqrt{x^2 + L^2/2}}$$




Figure P30.69

70. The force on a magnetic dipole μ aligned with a nonuniform magnetic field in the x direction is given by $F_x = |\mu| dB/dx$. Suppose that two flat loops of wire each have radius R and carry current I . (a) If the loops are arranged coaxially and separated by variable distance x , which is great compared to R , show that the magnetic force between them varies as $1/x^4$. (b) Evaluate the magnitude of this force if $I = 10.0$ A, $R = 0.500$ cm, and $x = 5.00$ cm.
71. A wire carrying a current I is bent into the shape of an exponential spiral $r = e^\theta$ from $\theta = 0$ to $\theta = 2\pi$, as in Figure P30.71. To complete a loop, the ends of the spiral are connected by a straight wire along the x axis. Find the magnitude and direction of \mathbf{B} at the origin. *Hints:* Use the Biot–Savart law. The angle β between a radial line and its tangent line at any point on the curve $r = f(\theta)$ is related to the function in the following way:

$$\tan \beta = \frac{r}{dr/d\theta}$$

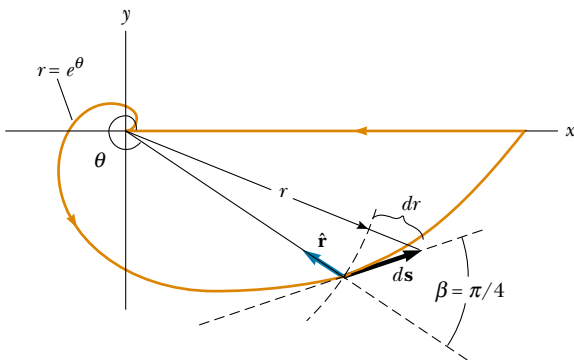


Figure P30.71

Thus, in this case $r = e^\theta$, $\tan \beta = 1$, and $\beta = \pi/4$. Therefore, the angle between $d\mathbf{s}$ and $\hat{\mathbf{r}}$ is $\pi - \beta = 3\pi/4$. Also,

$$ds = \frac{dr}{\sin \pi/4} = \sqrt{2} dr$$

72. Table P30.72 contains data taken for a ferromagnetic material. (a) Construct a magnetization curve from the data. Remember that $\mathbf{B} = \mathbf{B}_0 + \mu_0 \mathbf{M}$. (b) Determine the ratio B/B_0 for each pair of values of B and B_0 , and construct a graph of B/B_0 versus B_0 . (The fraction B/B_0 is called the relative permeability and is a measure of the induced magnetic field.)

TABLE P30.72

B (T)	B_0 (T)
0.2	4.8×10^{-5}
0.4	7.0×10^{-5}
0.6	8.8×10^{-5}
0.8	1.2×10^{-4}
1.0	1.8×10^{-4}
1.2	3.1×10^{-4}
1.4	8.7×10^{-4}
1.6	3.4×10^{-3}
1.8	1.2×10^{-1}

73. **Review Problem.** A sphere of radius R has a constant volume charge density ρ . Determine the magnetic field at the center of the sphere when it rotates as a rigid body with angular velocity ω about an axis through its center (Fig. P30.73).

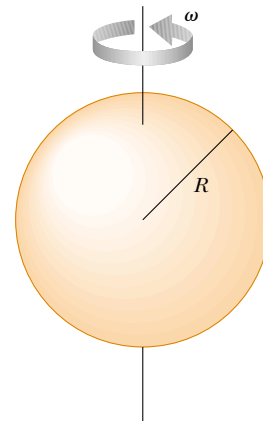


Figure P30.73 Problems 73 and 74.

74. **Review Problem.** A sphere of radius R has a constant volume charge density ρ . Determine the magnetic di-

pole moment of the sphere when it rotates as a rigid body with angular velocity ω about an axis through its center (see Fig. P30.73).

75. A long, cylindrical conductor of radius a has two cylindrical cavities of diameter a through its entire length, as shown in cross-section in Figure P30.75. A current I is directed out of the page and is uniform through a cross section of the conductor. Find the magnitude and direction of the magnetic field in terms of μ_0 , I , r , and a (a) at point P_1 and (b) at point P_2 .

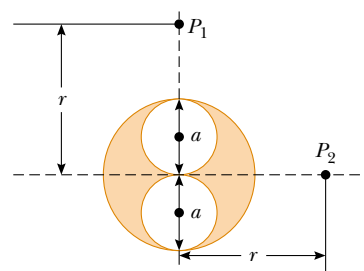



Figure P30.75

ANSWERS TO QUICK QUIZZES

- 30.1 (c) $F_1 = F_2$ because of Newton's third law. Another way to arrive at this answer is to realize that Equation 30.11 gives the same result whether the multiplication of currents is (2 A)(6 A) or (6 A)(2 A).
- 30.2 Closer together; the coils act like wires carrying parallel currents and hence attract one another.
- 30.3 b , d , a , c . Equation 30.13 indicates that the value of the line integral depends only on the net current through each closed path. Path b encloses 1 A, path d encloses 3 A, path a encloses 4 A, and path c encloses 6 A.
- 30.4 b , then $a = c = d$. Paths a , c , and d all give the same nonzero value $\mu_0 I$ because the size and shape of the paths do not matter. Path b does not enclose the current, and hence its line integral is zero.
- 30.5 Net force, yes; net torque, no. The forces on the top and bottom of the loop cancel because they are equal in magnitude but opposite in direction. The current in the left side of the loop is parallel to I_1 , and hence the force F_L exerted by I_1 on this side is attractive. The current in the right side of the loop is antiparallel to I_1 , and hence the force F_R exerted by I_1 on this side of the loop is repulsive. Because the left side is closer to wire 1, $F_L > F_R$ and a net force is directed toward wire 1. Because the forces on all four sides of the loop lie in the plane of the loop, there is no net torque.
- 30.6 Zero; no charges flow into a fully charged capacitor, so no change occurs in the amount of charge on the plates, and the electric field between the plates is constant. It is only when the electric field is changing that a displacement current exists.
- 30.7 (a) Increases slightly; (b) decreases slightly; (c) increases greatly. Equations 30.33 and 30.34 indicate that, when each metal is in place, the total field is $\mathbf{B} = \mu_0(1 + \chi)\mathbf{H}$. Table 30.2 indicates that $\mu_0(1 + \chi)\mathbf{H}$ is slightly greater than $\mu_0\mathbf{H}$ for aluminum and slightly less for copper. For iron, the field can be made thousands of times stronger, as we saw in Example 30.10.
- 30.8 One whose loop looks like Figure 30.31a because the remanent magnetization at the point corresponding to point b in Figure 30.30 is greater.
- 30.9 West to east. The lines of the Earth's magnetic field enter the planet in Hudson Bay and emerge from Antarctica; thus, the field lines resulting from the current would have to go in the opposite direction. Compare Figure 30.6a with Figure 30.35.

Calvin and Hobbes

by Bill Watterson

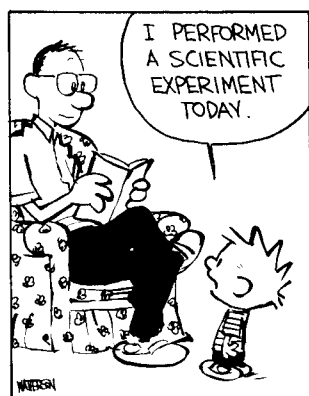

YOU KNOW HOW MAPS ALWAYS SHOW NORTH AS UP AND SOUTH AS DOWN? I WANTED TO SEE IF THAT WAS TRUE OR NOT.

