

GENERAL APTITUDE**Q. No. 1 – 5 Carry One Mark Each**

1. Consider the following sentences:

All benches are beds. No bed is a bulb. Some bulbs are lamps.

Which of the following can be inferred?

i. Some beds are lamps.

ii. Some lamps are beds.

(A) Only i

(B) Only ii

(C) Both i and ii

(D) Neither i nor ii

Answer: (D)

2. The following sequence of numbers is arranged in increasing order: 1, x, x, x, y, y, 9, 16, 18. Given that the mean and median are equal, and are also equal to twice the mode, the value of y is

(A) 5

(B) 6

(C) 7

(D) 8

Answer: (D)

3. The bacteria in milk are destroyed when it _____ heated to 80 degree Celsius.

(A) would be

(B) will be

(C) is

(D) was

Answer: (C)

4. If the radius of a right circular cone is increased by 50%, its volume increases by

(A) 75%

(B) 100%

(C) 125%

(D) 237.5%

Answer: (C)

5. _____ with someone else's email account is now very serious offence.

(A) Involving

(B) Assisting

(C) Tampering

(D) Incubating

Answer: (C)

Q. No. 6- 10 Carry Two Marks Each

6. Students applying for hostel rooms are allotted rooms in order of seniority. Students already staying in a room will move if they get a room in their preferred list. Preferences of lower ranked applicants are ignored during allocation.


Given the data below, which room will Ajit stay in?

Names	Student Seniority	Current room	Room preference list
Amar	1	P	R,S,Q
Akbar	2	None	R, S
Anthony	3	Q	P
Ajit	4	S	Q,P,R

- (A) P (B) Q (C) R (D) S

Answer: (B)

7. The bar graph below shows the output of five carpenters over one month, each of whom made different items of furniture: Chairs, tables, and beds.

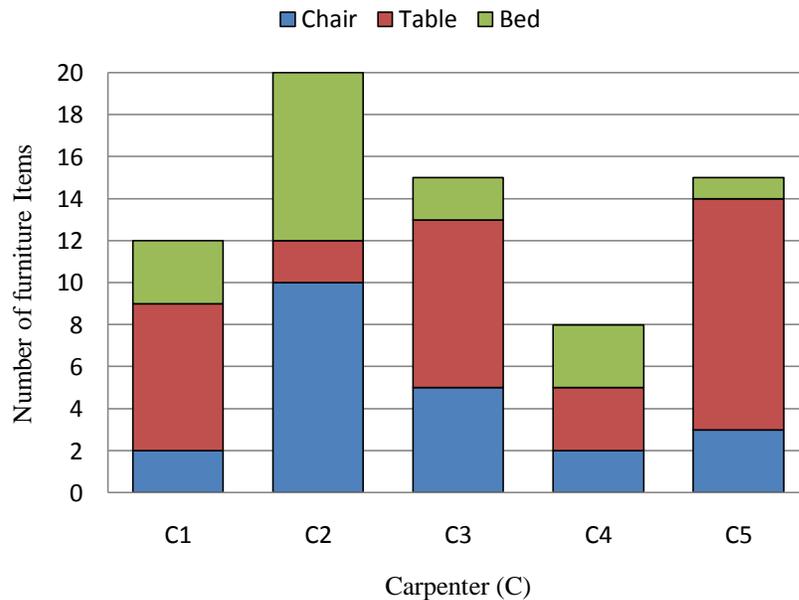

CIVIL ENGINEERING**Q. No. 1 - 25 Carry One Mark Each**

1. The ordinates of a 2-hour unit hydrograph for a catchment are given as

Time(h)	0	1	2	3	4
Ordinate(m^3/s)	0	5	12	25	41

The ordinate (in m^3/s) of a 4-hour unit hydrograph for this catchment at the time of 3 h would be_____.

Answer: (15)

2. A uniformly distributed line load of 500 kN/m is acting on the ground surface. Based on Boussinesq's theory, the ratio of vertical stress at a depth 2 m to that at 4 m, right below the line of loading, is

(A) 0.25 (B) 0.5 (C) 2.0 (D) 4.0

Answer: (C)

3. According to IS 456-2000, which one of the following statements about the depth of neutral axis $\chi_{u,bal}$ for a balanced reinforced concrete section is correct?

- (A) $\chi_{u,bal}$ depends on the grade of concrete only
(B) $\chi_{u,bal}$ depends on the grade of steel only
(C) $\chi_{u,bal}$ depends on both the grade of concrete and grade of steel
(D) $\chi_{u,bal}$ does not depend on the grade of concrete and grade of steel

Answer: (B)

4. Group I lists the type of gain or loss of strength in soils. Group II lists the property or process responsible for the loss or gain of strength in soils.

Group-I		Group-II	
P.	Regain of strength with time	1.	Boiling
Q.	Loss of strength due to cyclic loading	2.	Liquefaction
R.	Loss of strength due to upward seepage	3.	Thixotropy
S.	Loss of strength due to remolding	4.	Sensitivity

- (A) P-4, Q-1, R-2, S-3 (B) P-3, Q-1, R-2, S-4
 (C) P-3, Q-2, R-1, S-4 (D) P-4, Q-2, R-1, S-3

Answer: (C)

5. A runway is being constructed in a new airport as per the International Civil Aviation Organization (ICAO) recommendations. The elevation and the airport reference temperature of this airport are 535 m above the mean sea level and 22.65°C, respectively. Consider the effective gradient of runway as 1%. The length of runway required for a design-aircraft under the standard conditions is 2000 m. Within the framework of applying sequential corrections as per the ICAO recommendations, the length of runway corrected for the temperature is

- (A) 2223 m (B) 2250 m (C) 2500 m (D) 2750 m


Answer: (C)

6. A soil sample is subjected to a hydrostatic pressure, σ . The Mohr circle for any point in the soil sample would be

- (A) a circle of radius σ and center at the origin
 (B) a circle of radius σ and center at a distance σ from the origin
 (C) a point at a distance σ from the origin
 (D) a circle of diameter σ and center at the origin

Answer: (C)

7. The figure shows a two-hinged parabolic arch of span L subjected to a uniformly distributed load of intensity q per unit length.

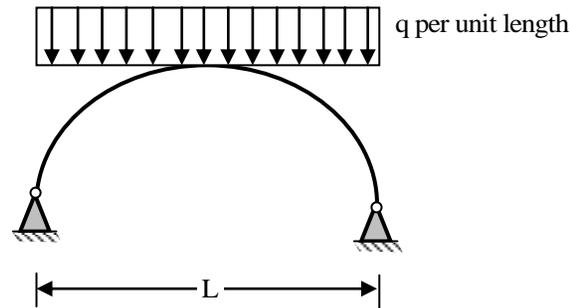

The maximum bending moment in the arch is equal to

- (A) $\frac{qL^2}{8}$ (B) $\frac{qL^2}{12}$ (C) zero (D) $\frac{qL^2}{10}$

Answer: (C)

8. For a steady incompressible laminar flow between two infinite parallel stationary plates, the shear stress variation is

- (A) linear with zero value at the plates
 (B) linear with zero value at the center
 (C) quadratic with zero value at the Plates
 (D) quadratic with zero value at the centre

Answer: (B)

9. An elastic bar of length L , uniform cross sectional area A , coefficient of thermal expansion α , and Young's modulus E is fixed at the two ends. The temperature of the bar is increased by T , resulting in an axial stress σ . Keeping all other parameters unchanged, if the length of the bar is doubled, the axial stress would be

- (A) σ (B) 2σ (C) 0.5σ (D) $0.25\alpha\sigma$

Answer: (A)

10. The number of parameters in the univariate exponential and Gaussian distributions, respectively, are

- (A) 2 and 2 (B) 1 and 2 (C) 2 and 1 (D) 1 and 1

Answer: (B)

11. The wastewater from a city, containing a high concentration of biodegradable organics, is being steadily discharged into a flowing river at a location S. If the rate of aeration of the river water is lower than the rate of degradation of the organics, then the dissolved oxygen of the river water
- (A) is lowest at the location S
 - (B) is lowest at a point upstream of the location S.
 - (C) remains constant all along the length of the river.
 - (D) is lowest at a point downstream of the location S.

Answer: (D)

12. The reaction rate involving reactants A and B is given by $-k[A]^\alpha[B]^\beta$. Which one of the following statements is valid for the reaction to be first-order reaction?
- (A) $\alpha = 0$ and $\beta = 0$
 - (B) $\alpha = 1$ and $\beta = 0$
 - (C) $\alpha = 1$ and $\beta = 1$
 - (D) $\alpha = 1$ and $\beta = 2$

Answer: (B)


13. A strip footing is resting on the ground surface of a pure clay bed having an undrained cohesion C_u . The ultimate bearing capacity of the footing is equal to
- (A) $2\pi C_u$
 - (B) πC_u
 - (C) $(\pi + 1)C_u$
 - (D) $(\pi + 2)C_u$

Answer: (D)

14. A simply supported beam is subjected to a uniformly distributed load. Which one of the following statements is true?
- (A) Maximum or minimum shear force occurs where the curvature is zero.
 - (B) Maximum or minimum bending moment occurs where the shear force is zero.
 - (C) Maximum or minimum bending moment occurs where the curvature is zero.
 - (D) Maximum bending moment and maximum shear force occur at the same section.

Answer: (B)

15. A triangular pipe network is shown in the figure.

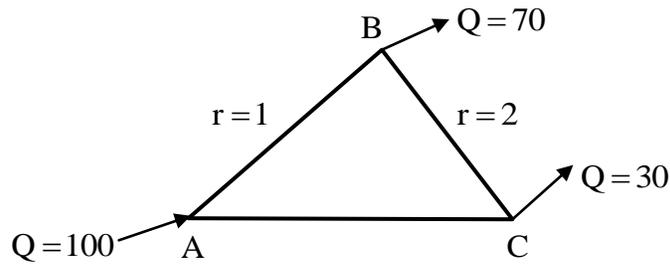

The head loss in each pipe is given by $h_f = rQ^{1.8}$, with the variables expressed in a consistent set of units. The value of r for the pipe AB is 1 and for the pipe BC is 2. If the discharge supplied at the point A (i.e., 100) is equally divided between the pipes AB and AC, the value of r (up to two decimal places) for the pipe AC should be _____

Answer: (0.62)

16. $\lim_{x \rightarrow 0} \left(\frac{\tan x}{x^2 - x} \right)$ is equal to _____

Answer: (-1)

17. A super-elevation e is provided on a circular horizontal curve such that a vehicle can be stopped on the curve without sliding. Assuming a design speed v and maximum coefficient of side friction f_{max} , which one of the following criteria should be satisfied?

(A) $e \leq f_{max}$

(B) $e > f_{max}$

(C) no limit on e can be set

(D) $e = \frac{1 - (f_{max})^2}{f_{max}}$

Answer: (A)

18. Which of the following is NOT present in acid rain ?



Answer: (D)

19. The accuracy of an Electronic Distance Measuring Instrument (EDMI) is specified as $\pm(a \text{ mm} + b \text{ ppm})$. Which one of the following statements is correct?
- (A) Both a and b remain constant, irrespective of the distance being measured.
- (B) a remains constant and b varies in proportion to the distance being measured.
- (C) a varies in proportion to the distance being measured and b remains constant.
- (D) Both a and b vary in proportion to the distance being measured.

Answer: (B)

20. Consider the following partial differential equation:

$$3 \frac{\partial^2 \phi}{\partial x^2} + B \frac{\partial^2 \phi}{\partial x \partial y} + 3 \frac{\partial^2 \phi}{\partial y^2} + 4\phi = 0$$

For this equation to be classified as parabolic, the value of B^2 must be_____.

Answer: (36)

21. The matrix P is the inverse of a matrix Q . If I denotes the identity matrix, which one of the following options is correct?
- (A) $PQ = I$ but $QP \neq I$
- (B) $QP = I$ but $PQ \neq I$
- (C) $PQ = I$ and $QP = I$
- (D) $PQ - QP = I$

Answer: (C)

22. Vehicles arriving at an intersection from one of the approach road follow the Poisson distribution. The mean rate of arrival is 900 vehicles per hour. If a gap is defined as the time difference between two successive vehicle arrivals (with vehicles assumed to be points), the probability (up to four decimal places) that the gap is greater than 8 seconds is_____.

Answer: (0.1354)

23. Let x be a continuous variable defined over the interval $(-\infty, \infty)$, and $f(x) = e^{-x-e^{-x}}$.

The integral $g(x) = \int f(x) dx$ is equal to


- (A) $e^{e^{-x}}$ (B) $e^{-e^{-x}}$ (C) e^{-e^x} (D) e^{-x}

Answer: (B)

24. The number of spectral bands in the Enhanced Thematic Mapper sensor on the remote sensing satellite Landsat-7 is
- (A) 64 (B) 10 (C) 8 (D) 15

Answer: (C)

25. A 3 m thick clay layer is subjected to an initial uniform pore pressure of 145 kPa as shown in the figure.

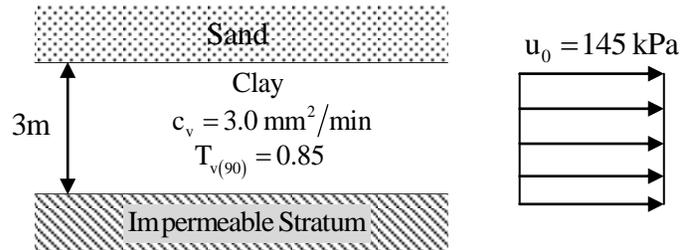

For the given ground conditions, the time (in days, rounded to the nearest integer) required for 90% consolidation would be _____


Answer: (1771)

Q. No. 26 - 55 Carry Two Marks Each

26. A planar truss tower structure is shown in the figure.

Consider the following statements about the external and internal determinacy's of the truss.

- (P) Externally Determinate
 (Q) External Static Indeterminacy = 1
 (R) External Static Indeterminacy = 2
 (S) Internally Determinate
 (T) Internal Static Indeterminacy = 1
 (U) Internal Static Indeterminacy = 2

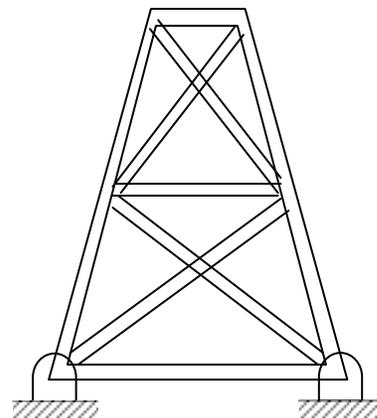


Which one of the following options is correct?

- (A) P-False; Q-True; R-False; S-False; T-False; U-True
- (B) P-False; Q-True; R-False; S-False; T-True; U-False
- (C) P-False; Q-False; R-True; S-False; T-False; U-True
- (D) P-True; Q-True; R-False; S-True; T-False; U-True

Answer: (A)


27. Consider the stepped bar made with a linear elastic material and subjected to an axial load of 1 kN, as shown in the figure.

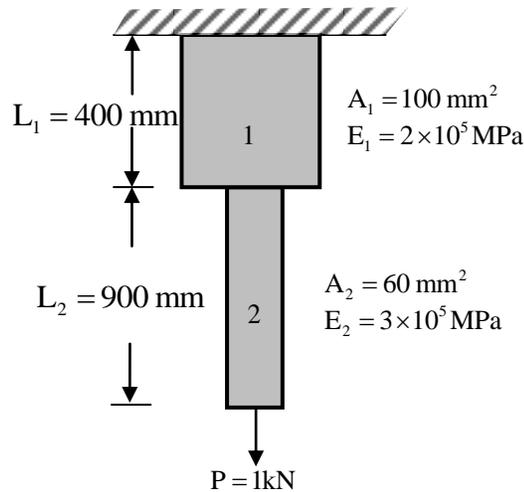

Segments 1 and 2 have cross-sectional area of 100 mm^2 and 60 mm^2 , Young's modulus of $2 \times 10^5 \text{ MPa}$ and $3 \times 10^5 \text{ MPa}$, and length of 400 mm and 900 mm , respectively. The strain energy (in N-mm, up to one decimal place) in the bar due to the axial load is _____.

Answer: (35)


28. Consider the beam ABCD shown in the figure.

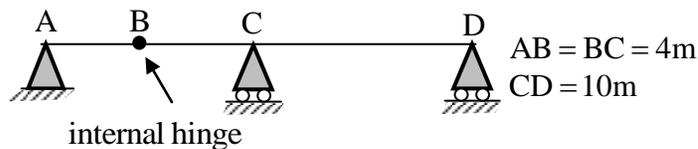

For a moving concentrated load of 50 kN on the beam, the magnitude of the maximum bending moment (in kN-m) obtained at the support C will be equal to _____.

Answer: (200)

29. A column is subjected to a load through a bracket as shown in the figure.

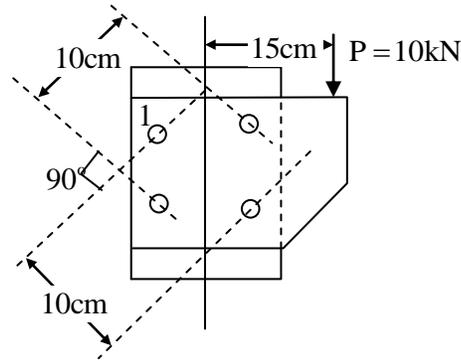

The resultant force (in kN, up to one decimal place) in the bolt 1 is _____

Answer: (6)


30. The activity details of a project are given below:

Activity	Depends on	Duration (in days)
P	--	6
Q	P	15
R	Q,T	12
S	R	16
T	P	10
U	Q,T	14
V	U	16

The estimated minimum time (in days) for the completion of the project will be _____.

Answer: (51)

31. The value of M in the beam ABC shown in the figure is such that the joint B does not rotate.

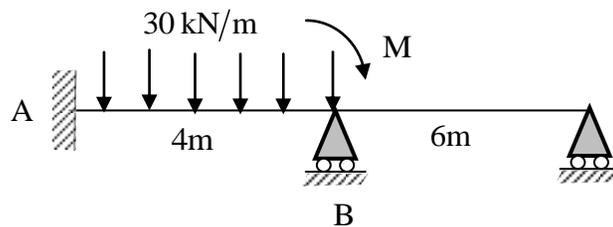

The value of support reaction (in kN) at B should be equal to _____.

Answer: (60)


32. Two wastewater streams A and B, having an identical ultimate BOD are getting mixed to form the stream C. The temperature of the stream A is 20°C and the temperature of the stream C is 10°C . It is given that
- The 5-day BOD of the stream A measured at $20^{\circ}\text{C}=50\text{ mg/L}$
 - BOD rate constant (base 10) at $20^{\circ}\text{C}=0.115$ per day
 - Temperature coefficient = 1.135
- The 5-day BOD (in mg/L, up to one decimal place) of the stream C, calculated at 10°C , is_____.

Answer: (21.21)

33. A particle of mass 2 kg is travelling at a velocity of 1.5 m/s. A force $f(t)=3t^2$ (in N) is applied to it in the direction of motion for a duration of 2 seconds, where t denotes time in seconds. The velocity (in m/s, up to one decimal place) of the particle immediately after the removal of the force is_____.

Answer: (5.5)

34. The queue length (in number of vehicles) versus time (in seconds) plot for an approach to a signalized intersection with the cycle length of 96 seconds is shown in the figure (not drawn to scale).

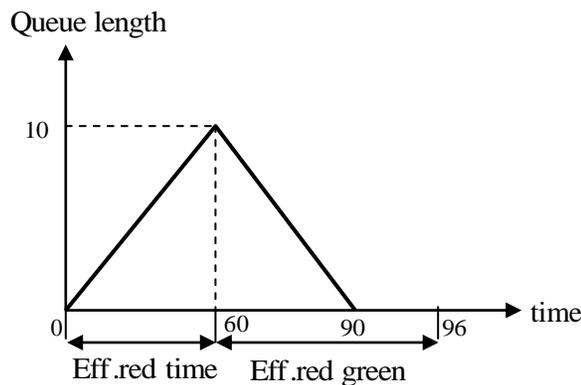

At time $t = 0$, the light has just turned red. The effective green time is 36 seconds, during which vehicles discharge at the saturation flow rate, s (in vph). Vehicles arrive at a uniform rate, v (in vph), throughout the cycle. Which one of the following statements is TRUE?

- (A) $v = 600$ vph, and for this cycle, the average stopped delay per vehicle = 30 seconds
- (B) $s = 1800$ vph, and for this cycle, the average stopped delay per vehicle = 28.125 seconds
- (C) $v = 600$ vph, and for this cycle, the average stopped delay per vehicle = 45 seconds
- (D) $s = 1200$ vph, and for this cycle, the average stopped delay per vehicle = 28.125 seconds


Answer: (B)

35. For the function $f(x) = a + bx$, $0 \leq x \leq 1$, to be a valid probability density function, which one of the following statements is correct?

- (A) $a = 1, b = 4$ (B) $a = 0.5, b = 1$ (C) $a = 0, b = 1$ (D) $a = 1, b = -1$

Answer: (B)


36. The infinite sand slope shown in the figure is on the verge of sliding failure. The ground water table coincides with the ground surface. Unit weight of water $\gamma_w = 9.81 \text{ kN/m}^3$.

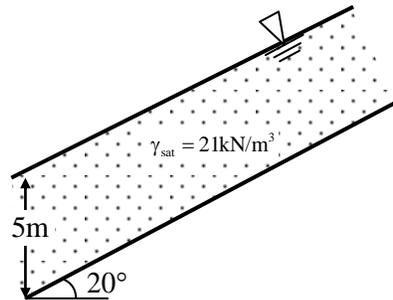

The value of the effective angle of internal friction (in degrees, up to one decimal place) of the sand is _____

Answer: (34.335)

37. A sluice gate used to control the flow in a horizontal channel of unit width is shown in the figure.

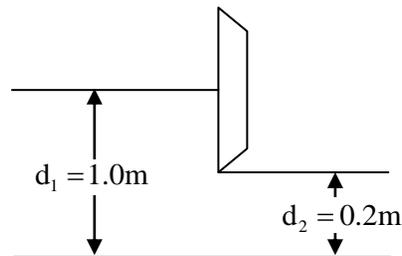

It is observed that the depth of flow is 1.0 m upstream of the gate, while the depth is 0.2 m downstream of the gate. Assuming a smooth flow transition across the sluice gate, i.e., without any energy loss, and the acceleration due to gravity as 10 m/s^2 , the discharge (in m^3/s , up to two decimal places) passing under the sluice gate is _____.

Answer: (0.82)

41. The solution of the equation $\frac{dQ}{dt} + Q = 1$ with $Q = 0$ at $t = 0$ is _____.

(A) $Q(t) = e^{-t} - 1$


(B) $Q(t) = 1 + e^{-t}$

(C) $Q(t) = 1 - e^{-t}$

(D) $Q(t) = 1 - e^{-t}$

Answer: (D)

42. Water flows through a 90° bend in a horizontal plane as depicted in the figure.

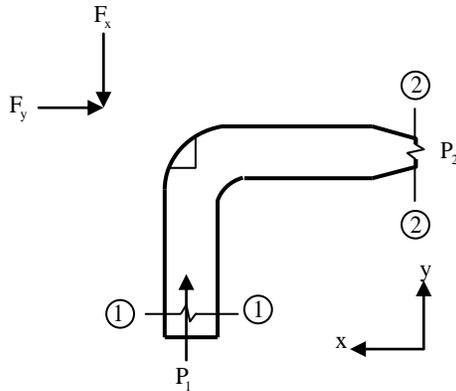

A pressure of 140 kPa is measured at section 1-1. The inlet diameter marked at section 1-1 is $\frac{27}{\sqrt{\pi}}$ cm, while the nozzle diameter marked at section 2-2 is $\frac{14}{\sqrt{\pi}}$ cm. Assume the following:

- (i) Acceleration due to gravity = 10 m/s².
- (ii) Weights of both the bent pipe segment as well as water are negligible.
- (iii) Friction across the bend is negligible.

The magnitude of the force (in kN, up to two decimal places) that would be required to hold the pipe section is _____.

Answer: (3.58)

43. A pre-tensioned rectangular concrete beam 150 mm wide and 300 mm depth is prestressed with three straight tendons, each having a cross-sectional area of 50 mm², to an initial stress of 1200 N/mm². The tendons are located at 100 mm from the soffit of the beam. If the modular ratio is 6, the loss of prestressing force (in kN, up to one decimal place) due to the elastic deformation of concrete only is _____.

Answer: (4.8)

44. The spherical grit particles, having a radius of 0.01mm and specific gravity of 3.0, need to be separated in a settling chamber. It is given that

- $g = 9.81 \text{ m/s}^2$
- the density of the liquid in the settling chamber = 1000 kg/m^3
- the kinematic viscosity of the liquid in the settling chamber = $10^{-6} \text{ m}^2/\text{s}$

Assuming laminar conditions, the settling velocity (in mm/s, up to one decimal place) is _____.

Answer: (0.436)

45. The equivalent sound power level (in dB) of the four sources with the noise levels of 60 dB, 69 dB, 70 dB and 79 dB is _____.

Answer: (79.9)

46. Consider the equation

$$\frac{du}{dt} = 3t^2 + 1 \text{ with } u=0 \text{ at } t=0.$$

This is numerically solved by using the forward Euler method with a step size, $\Delta t = 2$. The absolute error in the solution at the end of the first time step is _____.

Answer: (8)

47. It is proposed to drive H-piles up to a depth of 7 m at a construction site. The average surface area of the H-pile is 3m^2 per meter length. The soil at the site is homogeneous sand, having an effective friction angle of 32° . The ground water table (GWT) is at a depth of 2 m below the ground surface. The unit weights of the soil above and below the GWT are 16 kN/m^3 and 19kN/m^3 , respectively. Assume the earth pressure coefficient, $K = 1.0$, and the angle of wall friction, $\delta = 23^\circ$. The total axial frictional resistance (in kN, up to one decimal place) mobilized on the pile against the driving is _____.

Answer: (390.7)

48. The wastewater having an organic concentration of 54 mg/L is flowing at a steady rate of $0.8 \text{ m}^3/\text{day}$ through a detention tank of dimensions $2\text{m} \times 4\text{m} \times 2\text{m}$. If the contents of the tank are well mixed and the decay constant is 0.1 per day, the outlet concentration (in mg/L, up to one decimal place) is _____.

Answer: (18)

49. The radius of a horizontal circular curve on a highway is 120 m. The design speed is 60 km/hour, and the design coefficient of lateral friction between the tyre and the road surface is 0.15. The estimated value of superelevation required (if full lateral friction is assumed to develop), and the value of coefficient of friction needed (if no superelevation is provided) will, respectively, be

- (A) $\frac{1}{11.6}$ and 0.10 (B) $\frac{1}{10.5}$ and 0.37
 (C) $\frac{1}{11.6}$ and 0.24 (D) $\frac{1}{12.9}$ and 0.24

Answer: (C)

50. Consider two axially loaded columns, namely, 1 and 2, made of a linear elastic material with Young's modulus 2×10^5 MPa, square cross-section with side 10 mm, and length 1 m. For Column 1, one end is fixed and the other end is free. For Column 2, one end is fixed and the other end is pinned. Based on the Euler's theory, the ratio (up to one decimal place) of the buckling load of Column 2 to the buckling load of Column 1 is _____.

Answer: (8)

51. The observed bearings of a traverse are given below:

Line	Bearing	Line	Bearing
PQ	46° 15'	QP	226° 15'
QR	108° 15'	RQ	286° 15'
RS	201° 30'	SR	20° 30'
ST	321° 45'	TS	141° 45'

The station(s) most likely to be affected by the local attraction is/are

- (A) Only R (B) Only S (C) R and S (D) P and Q

Answer: (A)

52. A 1 m wide rectangular channel has a bed slope of 0.0016 and the Manning's roughness coefficient is 0.04. Uniform flow takes place in the channel at a flow depth of 0.5 m. At a particular section, gradually varied flow (GVF) is observed and the flow depth is measured as 0.6 m. The GVF profile at that section is classified as

- (A) S_1 (B) S_2 (C) M_1 (D) M_2

Answer: (C)

53. A consolidated undrained (\overline{CU}) triaxial compression test is conducted on a normally consolidated clay at a confining pressure of 100 kPa. The deviator stress at failure is 80 kPa, and the pore-water pressure measured at failure is 50 kPa. The effective angle of internal friction (in degrees, up to one decimal place) of the soil is _____.

Answer: (26.4)

54. An effective rainfall of 2-hour duration produced a flood hydrograph peak of $200 \text{ m}^3/\text{s}$. The flood hydrograph has a base flow of $20 \text{ m}^3/\text{s}$. If the spatial average rainfall in the watershed for the duration of storm is 2 cm and the average loss rate is 0.4 cm/hour, the peak of 2-hour unit hydrograph (in $\text{m}^3/\text{s}\text{-cm}$, up to one decimal place) is _____.

Answer: (150)

55. The following observations are made while testing aggregate for its suitability in pavement construction:

- (i) Mass of oven-dry aggregate in air = 1000 g
- (ii) Mass of saturated surface-dry aggregate in air = 1025 g
- (iii) Mass of saturated surface-dry aggregate under water = 625 g

Based on the above observations, the correct statement is

- (A) bulk specific gravity of aggregate = 2.5 and water absorption = 2.5 %
- (B) bulk specific gravity of aggregate = 2.5 and water absorption = 2.4 %
- (C) apparent specific gravity of aggregate = 2.5 and water absorption = 2.5%
- (D) apparent specific gravity of aggregate = 2.5 and water absorption = 2.4 %

Answer: (A)